


Tennessee is fully authorized by EPA to administer the NPDES program, which includes a general permit for stormwater discharges associated with industrial facilities. Tennessee's general industrial stormwater discharge permit is known as the Tennessee Multi Sector Permit (TMSP) and expired on April 14, 2020. Although coverage for existing permittees is administratively extended after TMSP expiration, no new permit coverages can be issued under the expired permit. Until a new permit is issued, an individual NPDES permit is the only way to provide permit coverage for industrial stormwater discharges.

Tennessee's 2015 TMSP reflected the 2015 federal Multi Sector General Permit (MSGP), which expires on June 4, 2020. EPA has proposed a 2020 MSGP that is fundamentally different from the previous permit and from Tennessee's 2015 TMSP. The comment period for the federal MSGP has been extended to June 1, 2020, and the final permit is not anticipated until November 12, 2020.

Rather than wait for EPA's final 2020 permit to inform Tennessee's 2020 TMSP, TDEC proposes reissuing the 2015 TMSP, unchanged, for a term of two years. This will provide an opportunity to review the final MSGP prior to proposing any changes to the TMSP. Reissuing the 2020 TMSP for a two-year term will avoid impacting new industrial facilities who would be unable to receive permit coverage without an active TMSP in Tennessee.

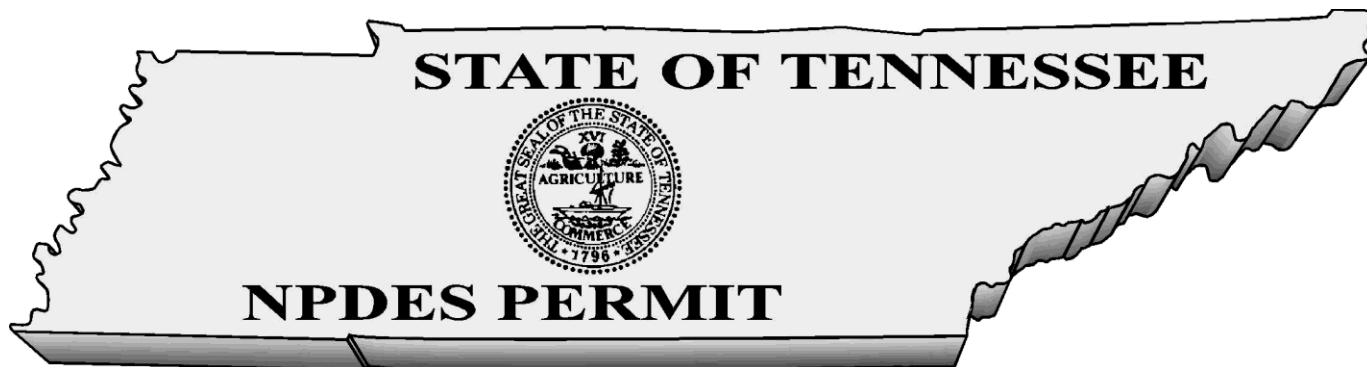

TENNESSEE STORM WATER
MULTI-SECTOR GENERAL PERMIT
FOR INDUSTRIAL ACTIVITIES

PERMIT NO. TNR050000

Under authority of the Tennessee Water Quality Control Act of 1977 (T.C.A. 69-3-101 et seq.) and the delegation of authority from the United States Environmental Protection Agency under the Federal Water Pollution Control Act, as amended by the Clean Water Act of 1977 (33 U.S.C. 1251, et seq.) and the Water Quality Act of 1987, P.L. 100-4, except as provided in section 1.2.3 below of this stormwater multi-sector general permit, operators of point source discharges of stormwater associated with industrial activity that discharge into waters of the state of Tennessee, represented by the industry sectors identified in part 11 of this permit, are authorized to discharge stormwater runoff associated with industrial activity in accordance with the following stormwater pollution prevention plan requirements, effluent limitations, monitoring and reporting requirements and other provisions as set forth in parts 1 through 11 herein, from the subject facility to waters of the state of Tennessee.

This permit is issued on:

This permit is effective on:

This permit expires on:

Jennifer Dodd
Director

**NPDES GENERAL PERMIT
FOR
STORM WATER DISCHARGES FROM INDUSTRIAL ACTIVITIES**

TABLE OF CONTENTS

1.	COVERAGE UNDER THIS PERMIT	1
1.1.	PERMIT AREA	1
1.2.	ELIGIBILITY	1
1.3.	AUTHORIZATION	8
1.4.	PERMIT ELIGIBILITY REGARDING PROTECTION OF WATER QUALITY STANDARDS AND COMPLIANCE WITH STATE ANTI-DEGRADATION REQUIREMENTS.....	9
1.5.	OVERVIEW OF THE MULTI-SECTOR GENERAL PERMIT.....	9
2.	NOTIFICATION REQUIREMENTS.....	9
2.1.	DEADLINES FOR NOTIFICATION	9
2.2.	CONTENTS OF NOTICE OF INTENT	10
2.3.	WHERE TO SUBMIT	11
2.4.	ELECTRONIC SUBMISSION OF NOIS	12
3.	SPECIAL CONDITIONS.....	12
3.1.	PROHIBITION OF NON-STORMWATER DISCHARGES	12
3.2.	RELEASES IN EXCESS OF REPORTABLE QUANTITIES	13
3.3.	LIST OF THE DIVISION’S ENVIRONMENTAL FIELD OFFICES (EFOS) AND COUNTIES	14
3.4.	CO-LOCATED INDUSTRIAL ACTIVITY	15
4.	STORM WATER POLLUTION PREVENTION PLAN (SWPPP)	15
4.1.	DEADLINES FOR PLAN PREPARATION AND COMPLIANCE	15
4.2.	SIGNATURE AND PLAN REVIEW	17
4.3.	KEEPING PLANS CURRENT	17
4.4.	CONTENTS OF THE PLAN	18
4.5.	ADDITIONAL POLLUTION PREVENTION PLAN REQUIREMENTS.....	18
4.6.	ADDITIONAL STORMWATER POLLUTION PREVENTION PLAN (SWPPP) REQUIREMENTS FOR DISCHARGES INTO WATERS WITH UNAVAILABLE PARAMETERS OR EXCEPTIONAL TENNESSEE WATERS	19
5.	NUMERIC EFFLUENT LIMITATIONS	21
5.1.	DISCHARGES ASSOCIATED WITH SPECIFIC INDUSTRIAL ACTIVITY	21
5.2.	COAL PILE RUNOFF.....	21
6.	MONITORING AND REPORTING REQUIREMENTS.....	21
6.1.	MONITORING REQUIREMENTS.....	21
6.2.	REPORTING: WHERE TO SUBMIT	21
6.3.	ELECTRONIC SUBMISSION OF REPORTS.....	22
6.4.	SPECIAL MONITORING REQUIREMENTS FOR COAL PILE RUNOFF.....	22
7.	STANDARD PERMIT CONDITIONS.....	24
7.1.	DUTY TO COMPLY.....	24
7.2.	CONTINUATION OF THE EXPIRED GENERAL PERMIT	24
7.3.	NEED TO HALT OR REDUCE ACTIVITY NOT A DEFENSE.....	25
7.4.	DUTY TO MITIGATE	25
7.5.	DUTY TO PROVIDE INFORMATION	25
7.6.	OTHER INFORMATION	25
7.7.	SIGNATORY REQUIREMENTS	25
7.8.	OIL AND HAZARDOUS SUBSTANCE LIABILITY	27
7.9.	PROPERTY RIGHTS	27
7.10.	SEVERABILITY	27
7.11.	REQUIRING AN INDIVIDUAL PERMIT OR AN ALTERNATIVE GENERAL PERMIT	28
7.12.	STATE/ENVIRONMENTAL LAWS	28
7.13.	PROPER OPERATION AND MAINTENANCE	29
7.14.	MONITORING AND RECORDS.....	29
7.15.	INSPECTION AND ENTRY	30

7.16. PERMIT ACTIONS	30
7.17. BYPASS OF TREATMENT FACILITY	30
7.18. UPSET CONDITIONS.....	31
8. REOPENER CLAUSE	31
8.1. POTENTIAL OR REALIZED IMPACTS ON WATER QUALITY	31
8.2. APPLICABLE REGULATIONS	32
9. TERMINATION OF COVERAGE.....	32
9.1. NOTICE OF TERMINATION	32
9.2. ADDRESSES	33
9.3. ELECTRONIC SUBMISSION OF NOTICE OF TERMINATION	33
9.4. NO EXPOSURE CERTIFICATION	33
10. DEFINITIONS AND LIST OF ACRONYMS.....	34
10.1. DEFINITIONS	34
10.2. LIST OF ACRONYMS	40
11. SPECIFIC REQUIREMENTS FOR INDUSTRIAL ACTIVITIES	1
Sector A - Stormwater Discharges Associated With Industrial Activity From Timber	
Products Facilities	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	1
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4. NUMERIC EFFLUENT LIMITATIONS	6
5. MONITORING AND REPORTING REQUIREMENTS	7
Sector B - Stormwater Discharges Associated With Industrial Activity From Paper And	
Allied Products Manufacturing Facilities	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	1
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4. NUMERIC EFFLUENT LIMITATIONS	6
5. MONITORING AND REPORTING REQUIREMENTS	6
Sector C - Stormwater Discharges Associated With Industrial Activity From Chemical and	
Allied Products Manufacturing Facilities	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	2
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4. NUMERIC EFFLUENT LIMITATIONS	6
5. MONITORING AND REPORTING REQUIREMENTS	7
Sector D - Stormwater Discharges Associated With Industrial Activity From Asphalt	
Paving and Roofing Materials and Lubricant Manufacturers	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	1
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4. NUMERIC EFFLUENT LIMITATIONS.	6
5. MONITORING AND REPORTING REQUIREMENTS	6
Sector E - Stormwater Discharges Associated With Industrial Activity From Glass, Clay,	
Cement, Concrete, and Gypsum Product Manufacturing Facilities	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	1
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4. NUMERIC EFFLUENT LIMITATIONS	6
5. MONITORING AND REPORTING REQUIREMENTS	7
Sector F - Stormwater Discharges Associated With Industrial Activity From Primary	
Metals Facilities	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	2

3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4.	NUMERIC EFFLUENT LIMITATIONS	8
5.	MONITORING AND REPORTING REQUIREMENTS	8
Sector G - Stormwater Discharges Associated With Industrial Activity From Metal Mining (Ore Mining and Dressing) Facilities		1
Sector H - Stormwater Discharges Associated With Industrial Activity From Inactive Coal Mines Not Under SMCRA Bond and Inactive Coal Mining-Related Facilities		1
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	7
5.	MONITORING AND REPORTING REQUIREMENTS	7
Sector I - Stormwater Discharges Associated With Industrial Activity From Oil and Gas Extraction Facilities		1
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	8
5.	MONITORING AND REPORTING REQUIREMENTS	8
Sector J - Stormwater Discharges Associated With Industrial Activity From Construction Sand and Gravel Mining and Processing and Dimension Stone Mining and Quarrying Facilities		1
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4.	NUMERIC EFFLUENT LIMITATIONS	7
5.	MONITORING AND REPORTING REQUIREMENTS	7
Sector K - Stormwater Discharges Associated With Industrial Activity From Hazardous Waste Treatment, Storage, or Disposal Facilities		1
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	2
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4.	NUMERIC EFFLUENT LIMITATIONS	6
5.	MONITORING AND REPORTING REQUIREMENTS	7
Sector L - Stormwater Discharges Associated With Industrial Activity From Landfills and Land Application Sites.....		1
1.	DISCHARGES COVERED UNDER THIS SECTION.	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	7
5.	MONITORING AND REPORTING REQUIREMENTS.....	8
Sector M - Stormwater Discharges Associated With Industrial Activity From Automobile Salvage Yards		1
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	7
5.	MONITORING AND REPORTING REQUIREMENTS.....	7
Sector N - Stormwater Discharges Associated With Industrial Activity From Scrap Recycling and Waste Recycling Facilities		1
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	12

5.	MONITORING AND REPORTING REQUIREMENTS	12
Sector O - Stormwater Discharges Associated With Industrial Activity From Steam		
	Electric Power Generating Facilities, Including Coal Handling Areas.....	1
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	8
5.	MONITORING AND REPORTING REQUIREMENTS	8
Sector P - Stormwater Discharges Associated With Industrial Activity From Motor Freight		
Transportation Facilities, Passenger Transportation Facilities, Petroleum Bulk Oil		
Stations and Terminals, Rail Transportation Facilities, and United States Postal		
Service Transportation Facilities.....		
	1	
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	2
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4.	NUMERIC EFFLUENT LIMITATIONS	7
5.	MONITORING AND REPORTING REQUIREMENTS	7
Sector Q - Stormwater Discharges Associated With Industrial Activity From Water		
Transportation Facilities That Have Vehicle Maintenance Shops and/or Equipment		
Cleaning Operations		
	1	
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	7
5.	MONITORING AND REPORTING REQUIREMENTS	8
Sector R - Stormwater Discharges Associated With Industrial Activity From Ship and Boat		
Building or Repairing Yards.....		
	1	
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	7
5.	MONITORING AND REPORTING REQUIREMENTS	7
Sector S - Stormwater Discharges Associated With Industrial Activity From Vehicle		
Maintenance Areas, Equipment Cleaning Areas, or Deicing Areas Located at Air		
Transportation Facilities		
	1	
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4.	NUMERIC EFFLUENT LIMITATIONS	8
5.	MONITORING AND REPORTING REQUIREMENTS	8
Sector T - Stormwater Discharges Associated With Industrial Activity From Treatment		
Works		
	1	
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	6
5.	MONITORING AND REPORTING REQUIREMENTS	6
Sector U - Stormwater Discharges Associated With Industrial Activity From Food and		
Kindred Products Facilities.....		
	1	
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	2
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4.	NUMERIC EFFLUENT LIMITATIONS	7
5.	MONITORING AND REPORTING REQUIREMENTS	7

Sector V - Stormwater Discharges Associated With Industrial Activity From Textile Mills, Apparel, and Other Fabric Product Manufacturing Facilities	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	2
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4. NUMERIC EFFLUENT LIMITATIONS	8
5. MONITORING AND REPORTING REQUIREMENTS	8
Sector W - Stormwater Discharges Associated With Industrial Activity From Wood and Metal Furniture and Fixture Manufacturing Facilities.....	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	1
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4. NUMERIC EFFLUENT LIMITATIONS	6
5. MONITORING AND REPORTING REQUIREMENTS	6
Sector X - Stormwater Discharges Associated With Industrial Activity From Printing and Platemaking Facilities	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	1
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4. NUMERIC EFFLUENT LIMITATIONS	6
5. MONITORING AND REPORTING REQUIREMENTS	6
Sector Y - Stormwater Discharges Associated With Industrial Activity From Rubber, Miscellaneous Plastic Products, and Miscellaneous Manufacturing Industries.....	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	2
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4. NUMERIC EFFLUENT LIMITATIONS	7
5. MONITORING AND REPORTING REQUIREMENTS	7
Sector Z - Stormwater Discharges Associated With Industrial Activity From Leather Tanning and Finishing Facilities.....	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	1
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4. NUMERIC EFFLUENT LIMITATIONS	7
5. MONITORING AND REPORTING REQUIREMENTS	7
Sector AA - Stormwater Discharges Associated With Industrial Activity From Fabricated Metal Products Industry.....	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	2
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4. NUMERIC EFFLUENT LIMITATIONS	7
5. MONITORING AND REPORTING REQUIREMENTS	7
Sector AB - Stormwater Discharges Associated With Industrial Activity From Facilities That Manufacture Transportation Equipment, Industrial, or Commercial Machinery	1
1. DISCHARGES COVERED UNDER THIS SECTION	1
2. SPECIAL CONDITIONS	2
3. STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4. NUMERIC EFFLUENT LIMITATIONS	7
5. MONITORING AND REPORTING REQUIREMENTS	8
Sector AC - Stormwater Discharges Associated With Industrial Activity From Facilities That Manufacture Electronic and Electrical Equipment and Components, Photographic and Optical Goods.....	1
1. DISCHARGES COVERED UNDER THIS SECTION	1

2.	SPECIAL CONDITIONS	2
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4.	NUMERIC EFFLUENT LIMITATIONS	7
5.	MONITORING AND REPORTING REQUIREMENTS	7
Sector AD - Stormwater Discharges Associated With Industrial Activity From Facilities		
That Are Not Covered Under Sectors A Thru AC.....		1
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	6
5.	MONITORING AND REPORTING REQUIREMENTS	6
Sector AE - Stormwater Discharges Associated With Industrial Activity From Facilities		
That Are Not Covered Under Sectors A Thru AC (Monitoring Not Required)		1
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	1
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	1
4.	NUMERIC EFFLUENT LIMITATIONS	6
5.	MONITORING AND REPORTING REQUIREMENTS	6
Sector AF - Stormwater Discharges Associated With Industrial Activity From Borrow Pits,		
Soil Harvesting Sites and Spoil Piles		1
1.	DISCHARGES COVERED UNDER THIS SECTION	1
2.	SPECIAL CONDITIONS	2
3.	STORMWATER POLLUTION PREVENTION PLAN REQUIREMENTS	2
4.	NUMERIC EFFLUENT LIMITATIONS	6
5.	MONITORING AND REPORTING REQUIREMENTS	7
ADDENDUM A - POLLUTANTS IDENTIFIED IN TABLES II AND III OF APPENDIX D OF 40		
CFR PART 122.....		1
ADDENDUM B - NOTICE OF INTENT (NOI) FORM.....		1
ADDENDUM C - LIST OF APPLICABLE REFERENCES		1
ADDENDUM D – ANNUAL STORM WATER MONITORING REPORT FORM.....		1
ADDENDUM E – DISCHARGE MONITORING REPORT (DMR) FORM.....		1

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

1. COVERAGE UNDER THIS PERMIT

1.1. Permit Area

The permit is being issued for the State of Tennessee.

1.2. Eligibility

1.2.1. Discharges Covered

Except for stormwater discharges identified under section 1.2.3 below, this permit may cover all new and existing point source discharges of stormwater to waters of the state of Tennessee that are associated with industrial activity identified under the coverage sections contained in part 11. (see Table 1). Military installations must comply with the permit and monitoring requirements for all sectors that describe industrial activities that such installations perform. Similarly, facilities that have "co-located" activities, see subpart 3.4 below, that are described in more than one sector need to comply with applicable conditions of each sector.

Table 1

Stormwater Discharges From:	SIC Codes:	Are Listed in Part:
Timber Products Facilities	2411, 2421, 2426, 2429, 2431- 2439 (except 2434), 2441-2449, 2451, 2452, 2491- 2499	11.A.1.
Paper and Allied Products Manufacturing Facilities	2611, 2621, 2631, 2652 - 2657, 2671, 2672- 2679	11.B.1.
Chemical and Allied Products Manufacturing Facilities	2812- 2819, 2821- 2824, 2841, 2833- 2836, 2842- 2844, 2851, 2861- 2869, 2873- 2879, 2891- 2899. 2911, 3952	11.C.1.
Asphalt Paving, Roofing Materials, and Lubricant Manufacturing Facilities	2951, 2952, 2992	11.D.1.
Glass, Clay, Cement, Concrete, and Gypsum Product Manufacturing Facilities	3211, 3221, 3229, 3231, 3241, 3251, 3252, 3255, 3259, 3261, 3262, 3263, 3264, 3269, 3271, 3272, 3273, 3274, 3275, 3281, 3285, 3291, 3292, 3295, 3296, 3297, 3299	11.E.1.
Primary Metals Facilities	3312- 3317, 3321-3325, 3331, 3334, 3339, 3341, 3351-3357, 3363 - 3369, 3398, 3399	11.F.1.
Metal Mines (Ore Mining and Dressing) (RESERVED)	(RESERVED)	11.G.1.
Inactive Coal Mines and Inactive Coal Mining-Related Facilities	1221, 1222, 1231, 1241	11.H.1.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

Stormwater Discharges From:	SIC Codes:	Are Listed in Part:
Oil or Gas Extraction Facilities	1311, 1321, 1381, 1382, 1389	11.I.1.
Construction Sand and Gravel Mining and Processing and Dimension Stone Mining and Quarrying Facilities	1411, 1422, 1423, 1429, 1442, 1446, 1455, 1459, 1474- 1479, 1481, 1499	11.J.1.
Hazardous Waste Treatment Storage or Disposal Facilities	4953, however, may use main facility's SIC code	11.K.1.
Landfills and Land Application Sites	4953, except for hazardous waste TSD facilities	11.L.1.
Automobile Salvage Yards	5015	11.M.1.
Scrap Recycling and Waste and Recycling Facilities	5093	11.N.1.
Steam Electric Power Generating Facilities	4911	11.O.1.
Vehicle Maintenance or Equipment Cleaning areas at Motor Freight Transportation Facilities, Passenger Transportation Facilities, Petroleum Bulk Oil Stations and Terminals, the United States Postal Service, or Railroad Transportation Facilities	4011, 4013, 4111, 4119, 4121, 4131, 4141, 4142, 4151, 4173, 4212, 4213, 4214, 4215, 4221, 4222, 4225, 4226, 4231, 4311, 5171	11.P.1.
Vehicle Maintenance Areas and Equipment Cleaning Areas of Water Transportation Facilities	4412, 4424, 4432, 4449, 4481, 4482, 4489, 4491, 4492, 4493, 4499	11.Q.1.
Ship or Boat Building and Repair Yards	3731, 3732	11.R.1.
Vehicle Maintenance Areas, Equipment Cleaning Areas or From Airport Deicing Operations located at Air Transportation Facilities	4512, 4513, 4522, 4581	11.S.1.
Wastewater Treatment Works	4952	11.T.1.
Food and Kindred Products Facilities	2011, 2013, 2015, 2021, 2022, 2023, 2024, 2026, 2032, 2033, 2034, 2035, 2037, 2038, 2041, 2043, 2044, 2045, 2046, 2047, 2048, 2051, 2052, 2053, 2061, 2062, 2063, 2064, 2066, 2067, 2068, 2074, 2075, 2076, 2077, 2079, 2082, 2083, 2084, 2085, 2086, 2087, 2091, 2092, 2095, 2096, 2097, 2098, 2099, 2111, 2121, 2131, 2141	11.U.1.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

Stormwater Discharges From:	SIC Codes:	Are Listed in Part:
Textile Mills, Apparel and other Fabric Product Manufacturing Facilities	2211, 2221, 2231, 2241, 2251, 2252, 2253, 2254, 2257, 2258, 2259, 2261, 2262, 2269, 2273, 2281, 2282, 2284, 2295, 2296, 2297, 2298, 2299, 2311, 2321, 2322, 2323, 2325, 2326, 2329, 2331, 2335, 2337, 2339, 2341, 2342, 2353, 2361, 2369, 2371, 2381, 2384, 2385, 2386, 2387, 2389, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2399, 3131, 3141, 3143, 3144, 3149, 3151, 3161, 3171, 3172, 3199	11.V.1.
Furniture and Fixture Manufacturing Facilities	2434, 2511, 2512, 2514, 2515, 2517, 2519, 2521, 2522, 2531, 2541, 2542, 2591, 2599	11.W.1.
Printing and Platemaking Facilities	2721, 2732, 2741, 2752, 2754, 2759, 2761, 2771, 2782, 2789, 2791, 2796	11.X.1.
Rubber and Miscellaneous Plastic Product Manufacturing Facilities	3011, 3021, 3052, 3053, 3061, 3069, 3081, 3082, 3083, 3084, 3085, 3086, 3087, 3088, 3089, 3931, 3942, 3944, 3949, 3951, 3952, 3953, 3955, 3961, 3965, 3991, 3993, 3995, 3996, 3999	11.Y.1.
Leather Tanning and Finishing Facilities	3111, 3143	11.Z.1.
Facilities That Manufacture Metal Products including Jewelry, Silverware and Plated Ware	3441, 3412, 3421, 3423, 3425, 3429, 3431, 3432, 3433, 3441, 3442, 3443, 3444, 3446, 3448, 3449, 3451, 3452, 3463, 3465, 3466, 3469, 3471, 3479, 3482, 3483, 3484, 3489, 3491, 3492, 3493, 3494, 3495, 3496, 3497, 3498, 3499, 3911, 3914, 3915	11.AA.1.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

Stormwater Discharges From:	SIC Codes:	Are Listed in Part:
Facilities That Manufacture Transportation Equipment, Industrial or Commercial Machinery	3511, 3519, 3523, 3524, 3531, 3532, 3533, 3534, 3535, 3536, 3537, 3541, 3542, 3543, 3544, 3545, 3546, 3547, 3548, 3549, 3552, 3553, 3554, 3555, 3556, 3559, 3561, 3562, 3563, 3564, 3565, 3566, 3567, 3568, 3569, 3581, 3582, 3585, 3586, 3589, 3592, 3593, 3594, 3596, 3599, 3711, 3713, 3714, 3715, 3716, 3721, 3724, 3728, 3743, 3751, 3761, 3764, 3769, 3792, 3795, 3799	11.AB.1.
Facilities That Manufacture Electronic and Electrical Equipment and Components, Photographic and Optical Goods	3571, 3572, 3575, 3577, 3578, 3579, 3612, 3613, 3621, 3624, 3625, 3629, 3631, 3632, 3633, 3634, 3635, 3639, 3641, 3643, 3644, 3645, 3646, 3647, 3648, 3651, 3652, 3661, 3663, 3669, 3671, 3672, 3674, 3675, 3677, 3678, 3679, 3691, 3692, 3694, 3695, 3699, 3812, 3813, 3821, 3822, 3823, 3824, 3825, 3826, 3827, 3829, 3841, 3842, 3843, 3844, 3851, 3861, 3873	11.AC.1.
Facilities That Are Not Covered Under Sectors A Thru AC (Monitoring Required)	Varies, may include 9999	11.AD.1.
Facilities That Are Not Covered Under Sectors A Thru AC (Monitoring Not Required)	Varies, may include 9999	11.AE.1.
Stormwater Discharges Associated With Industrial Activity From Borrow Pits, Soil Harvesting Sites and Spoil Piles	Varies, may include 9999	11.AF.1.

Although the Office of Management and Budget's North American Industry Classification System is intended to replace the 1987 Standard Industrial Classification (SIC) Code, the EPA decided to continue using the 1987 SIC code system as the primary classification system under this permit because the stormwater regulations (40 CFR 122.26(b) (14)) refer to these codes and because this code system adequately identifies the facilities.

1.2.2. Construction

This permit may authorize stormwater discharges associated with industrial activity that are mixed with stormwater discharges associated with industrial activity from construction

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

activities, provided that the stormwater discharge from the construction activity is authorized by and in compliance with the terms of a different NPDES (National Pollutant Discharge Elimination System) general permit or individual permit authorizing such discharges.

1.2.3. Limitations on Coverage

The following stormwater discharges associated with industrial activity are not authorized by this permit:

- Storm water discharges associated with industrial activities that are not listed under the coverage sections contained in part 11 (see Table 1 above).
- Storm water discharges associated with industrial activity that are mixed with sources of non-stormwater other than non-stormwater discharges that are:
 - In compliance with a different NPDES permit; or
 - Identified by and in compliance with subpart 3.1 (Prohibition of Non-stormwater Discharges) of this permit.
- Storm water discharges associated with industrial activity that are subject to an existing NPDES individual or general permit.
- Are located at a facility where an NPDES permit has been issued in accordance with subpart 7.11 (Requiring an Individual Permit or an Alternative General Permit) of this permit.
- Storm water discharges associated with industrial activity that the Division of Water Resources (the division) has determined to be or may reasonably be expected to be contributing to a violation of a water quality standard.
- Discharges subject to stormwater effluent guidelines, not described under part 11.
- Storm water discharges associated with industrial activity from inactive mining, inactive landfills, or inactive oil and gas operations occurring on Federal lands where an operator cannot be identified.
- Discharges Negatively Affecting a Property on the National Historic Register – Industrial stormwater discharges that would negatively affect a property that is listed or is eligible for listing in the National Historic Register maintained by the Secretary of Interior.
- Discharges into Outstanding National Resource Waters – The director shall not grant coverage under this permit for discharges into waters that are designated by the Water Quality Control Board as Outstanding National Resource Waters (ONRWs) Designation of ONRWs are made according to TDEC Rules, [Chapter 0400-40-3-.06](#).
- Discharges into Exceptional Tennessee Waters – The director shall not grant coverage under this permit for potential discharges of pollutants, which would cause degradation to waters designated by TDEC as Exceptional Tennessee waters. Identification of Exceptional Tennessee waters is made according to TDEC Rules, [Chapter 0400-40-3-.06](#).
- Discharges to waters with unavailable parameters:

Any operator who intends to obtain authorization under the TMSP for all new and existing stormwater discharges to waters with unavailable parameters, or discharges upstream of waters impaired by the same parameter, that may affect the waters with unavailable parameters, from facilities where there is a reasonable potential to contain pollutants for which the receiving water is impaired, must satisfy the following conditions prior to the authorization:

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

1 Requirements for New Discharges or Existing Discharges Proposing an Increase of Pollutant Loading

Prior to the division's granting coverage under the TMSP, the operator shall provide an estimate of pollutant loads in stormwater discharges from the facility to the division. This estimate shall include the documentation upon which the estimate is based (e.g., sampling data from the facility, sampling data from substantially identical outfalls at similar facilities, modeling, etc.). Existing facilities should base this estimate on actual analytical data, if available. This information shall be submitted in writing to the division (see subpart 2.3: Where to Submit) at least 90 days prior to commencement of proposed industrial activities at the site.

If a Total Maximum Daily Load (TMDL) has been approved, permit coverage is available only if the operator has received notice from the division confirming eligibility.

Following receipt of the information regarding an estimate of pollutant loads, the division anticipates using the following process in making eligibility determinations for new discharges into waters that do not meet their designated classified use where a TMDL has been developed:

- The division will notify the facility operator that the estimated pollutant load is consistent with the TMDL and that the proposed stormwater discharges meet the eligibility requirements of the TMSP and may be authorized under this permit; or
- The division will notify the facility operator and EPA that the estimated pollutant load is not consistent with the TMDL and that the proposed stormwater discharges do not meet the eligibility requirements of the TMSP and cannot be authorized under this NPDES permit.

If a Total Maximum Daily Load (TMDL) has not been approved, permit coverage for new discharges or existing discharges proposing an increase of pollutant loading is not available under this permit for discharges to waters with unavailable parameters and the operator must seek coverage under a separate (individual) permit.

2 Requirements for Existing Discharges

If a Total Maximum Daily Load (TMDL) has been approved, permit coverage is available only if the operator has received notice from the division confirming eligibility.

If a TMDL has been approved, the division will require the operator to provide an estimate of pollutant loads in stormwater discharges from the facility. This estimate must include the documentation upon which the estimate is based (e.g., sampling data from the facility, sampling data from substantially identical outfalls at similar facilities, modeling, etc.). Facilities with existing discharges must base this estimate on actual analytical data, if available.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

The division anticipates using the following process in making eligibility determinations for existing discharges into waters with unavailable parameters where a TMDL has been approved:

- the division will notify the facility operator that the estimated pollutant load is consistent with the TMDL and that the proposed stormwater discharges meet the eligibility requirements of the TMSP and may be authorized under this NPDES permit; or
- the division will notify the facility operator that the estimated pollutant load is not consistent with the TMDL and that the proposed stormwater discharges do not meet the eligibility requirements of the TMSP and cannot be authorized under this NPDES permit.

If a Total Maximum Daily Load (TMDL) has not been approved at the time of permit authorization, coverage under this permit is available only if the pollutant loading from existing facilities remains unchanged or is reduced as a result of additional pollution prevention measures as identified in the facility's Stormwater Pollution Prevention Plan (SWPPP).

If a TMDL is approved during the term of this permit and identifies existing permitted discharges as having a reasonable potential to contain pollutants for which the receiving water has unavailable parameters, these discharges shall no longer be authorized by this permit unless, following notification by the division:

- The operator completes revisions to the Stormwater Pollution Prevention Plan (SWPPP) to include additional and/or modified Best Management Practices (BMPs) designed to comply with any applicable Waste Load Allocation (WLA) established for facility discharges within 30 calendar days following notification by the division; and
- The operator implements the additional and/or modified BMPs not requiring construction within 60 days;
- In cases where construction is necessary, the SWPPP shall contain a schedule that provides compliance with the SWPPP as expeditiously as practicable, but no later than 1 year following notification by the division; and
- A report is submitted to the division, which documents actions taken to comply with this condition, including estimated pollutant loads, within 90 calendar days following implementation of the additional and/or modified BMPs.

Additional Monitoring for Existing Discharges to Waters with Unavailable Parameters

The permittee shall perform analytical monitoring for each outfall at least quarterly for any pollutant(s) for which the water has unavailable parameters where there is a reasonable potential for discharges to contain any or all of these pollutants (i.e. the pollutant is listed in the Monitoring and Reporting Requirements part of the applicable sector or the facility has knowledge that a pollutant of concern is present at the facility and exposed to stormwater). Monitoring results should be submitted to the division using the stormwater

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

monitoring report (see Reporting: Where to Submit) within 45 calendar days following sample collection. These monitoring requirements are not eligible for any waivers listed elsewhere in the permit.

1.2.4. Stormwater Not Associated With Industrial Activity

Storm water discharges associated with industrial activity that are authorized by this permit may be combined with other sources of stormwater that are not classified as associated with industrial activity pursuant to 40 CFR 122.26(b)(14).

1.2.5. Threatened and Endangered Species Protection

- a) Issuance of a Notice of Coverage (NOC) under this permit will constitute confirmation of the division's finding that, with properly developed and implemented SWPPP, the discharges authorized hereunder are not likely to result in the taking of threatened and endangered species.
- b) Should the division later determine that the discharges covered by this permit would result in the taking of threatened or endangered species, or are otherwise not in compliance with the [Endangered Species Act](#), the director, after written notification to the permittee, shall either:
 - i. Notify the permittee that it is no longer eligible for coverage under this permit and require coverage under an individual NPDES permit. The permittee will continue to be covered under this permit until the division issues an individual NPDES permit, provided a timely application for an individual permit is made. A timely application is defined as submitting to the division a complete permit application, including sampling, within 90 days of the notice from the director requiring the application. A permittee may request a later date for the timely submission of an individual NPDES permit application for just cause; or
 - ii. Notify the permittee that it must modify its SWPPP such that as a consequence, the discharges authorized by this permit will not result in the taking of threatened and endangered species and otherwise be in compliance with the Endangered Species Act. The permittee shall have 60 days after such notice to make such modifications to the SWPPP, and then 12 weeks to implement these modifications, unless the permittee justifies to the division that a longer time is necessary for their implementation. Should a longer time be required, the permittee shall submit to the division's local Environmental Field Office (see list of EFOs under subpart 3.3 on page 14 of this permit) a brief summary of the proposed modifications of SWPPP, including a timetable for implementation.

1.3. Authorization

Dischargers of stormwater associated with industrial activity must submit a complete Notice of Intent (NOI) in accordance with the requirements of part 2 of this permit, using a NOI form as found in **Addendum B** (or a copy thereof), to be authorized to discharge under this general permit. The division will send to the permittee a written Notice of Coverage (NOC), informing the permittee that the NOI was received and stormwater discharges from the industrial activity have been approved under this general permit. The operator is authorized to discharge stormwater associated with the industrial activity as of the effective date on the division

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

prepared NOC. A copy of the NOC shall be kept on site. The division may deny coverage under this permit and require submittal of an application for an individual NPDES permit based on a review of the NOI or other information.

Assigning a permit tracking number by the division to a proposed stormwater discharge does not confirm or imply an authorization to discharge under this permit. Correspondence with the permittee is maintained through the primary contact person listed on the NOI.

1.4. Permit Eligibility Regarding Protection of Water Quality Standards and Compliance with State Anti-degradation Requirements

Pursuant to the Rules of the Tennessee Department of Environment and Conservation (the department), Chapter 0400-40-3-.06, titled "Tennessee Antidegradation Statement," and in consideration of the department's directive in attaining the greatest degree of effluent reduction achievable in municipal, industrial, and other wastes, the permittee shall further be required, pursuant to the terms and conditions of this permit, to comply with any applicable Waste Load Allocations (WLA), effluent limitations, and schedules of compliance, required to implement applicable water quality standards, to comply with a State Water Quality Plan or other State or Federal laws or regulations, or where practicable, to comply with a standard permitting no discharge of pollutants. Additional Stormwater Pollution Prevention Plan (SWPPP) requirements, as described in subpart 4.6, are applicable to new discharges and discharges which constitute an increase of pollutant loading for discharges to waters identified by the department as Exceptional Tennessee waters, or discharges upstream of Exceptional Tennessee waters, that may affect the Exceptional Tennessee waters.

1.5. Overview of the Multi-Sector General Permit

Parts 1 through 10 of this general permit apply to all industrial facilities. Parts 1 and 2 describe eligibility requirements and the process for obtaining permit coverage. Parts 3 through 10 contain "basic" permit requirements.

part 11 provides additional requirements for particular sectors of industrial activity. For example, primary metal facilities adds subpart 11.F. to the "universal" parts 1 through 10 requirements.

Some facilities may have "co-located" activities that are described in more than one sector and need to comply with applicable conditions of each sector. For example, a chemical manufacturing facility could have a land application site and be subject to subpart 11.C. - Chemical and Allied products Manufacturing sector (primary activity), with runoff from the land application site (co-located activity) also subject to conditions in subpart 11.L. - Landfills and Land Application Sites.

2. NOTIFICATION REQUIREMENTS

2.1. Deadlines for Notification

2.1.1. Existing Facility

Except as provided in sections 2.1.4 (New Operator), and 2.1.5 (Late Notification), individuals who intend to obtain coverage for an existing stormwater discharge associated with industrial

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

activity under this general permit shall submit an NOI in accordance with the requirements of this part not more than 30 days following the effective date of this permit.

2.1.2. New Facility

For a new facility, an NOI shall be submitted at least 7 days prior to the commencement of any industrial activity, except as provided in sections 2.1.3 (Oil and Gas Operations), 2.1.4 (New Operator), and 2.1.5 (Late Notification).

2.1.3. Oil and Gas Operations

Operators of oil and gas exploration, production, processing, or treatment operations or transmission facilities, that were not required to submit a permit application as of May 31, 1997 in accordance with 40 CFR 122.26(c)(1)(iii), but that after May 31, 1997 have a discharge of a reportable quantity of oil or a hazardous substance for which notification is required pursuant to either 40 CFR 110.6, 40 CFR 117.21, or 40 CFR 302.6, must submit an NOI in accordance with the requirements of this permit within 14 calendar days of the first knowledge of such release.

2.1.4. New Operator

Where the operator of a facility with a stormwater discharge associated with industrial activity that is covered by this permit changes, the new operator of the facility must submit an NOI in accordance with the requirements of this part at least 5 days prior to the change.

2.1.5. Late Notification

An operator of a stormwater discharge associated with industrial activity is not precluded from submitting an NOI in accordance with the requirements of this part after the dates provided in sections 2.1.1, 2.1.2, 2.1.3, or 2.1.4 of this permit.

2.2. Contents of Notice of Intent

The NOI shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit and shall include the following information:

2.2.1. Change of Operator

Whether this NOI is being submitted due to a change in the operator or to update facility information (such as a name of facility, new contact, E-mail address, etc.) of a facility which is currently covered under the Tennessee Stormwater Multi-Sector General Permit for Industrial Activities, the former or the current operator's permit tracking number;

2.2.2. Facility Identification and Location Information

The legal and official name of the facility, and the address or description of location of the facility, the name of county the facility is located, facility latitude and longitude, as well as a copy of a U.S.G.S. topographical map, a city map, or a county map, identifying the location of the facility;

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

2.2.3. Facility Operator

The name of the person, firm, organization, or other entity, which owns and/or operates the subject facility; the name, title or position, mailing address and E-mail of an official contact person, as well as the facility contact person (i.e. local contact, if applicable) and an indication of the mailing address where correspondence should be sent;

2.2.4. Receiving Water and Outfall Information

Number of stormwater outfalls at the facility; for each outfall, names and stream miles or location(s) of the receiving stream(s) and/or lake(s);

2.2.5. Industrial Information

The SIC (Standard Industrial Classification) code(s) for the facility (primary, secondary-if applicable-etc.), a brief description of the nature of the business at the facility, and an indication of which activities are occurring at the facility; area of property associated with industrial activity in acres (Please note that area of facility property should not include recreation areas, landscaping, lawns, greenfields, forest, office buildings, employee parking lots, etc.);

2.2.6. Certification and Signature

The following certification shall be signed in accordance with subpart 7.7:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the site, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. As specified in Tennessee Code Annotated Section 39-16-702(a)(4), this declaration is made under penalty of perjury.

2.2.7. Pollution Prevention Plan Preparation and Implementation

All new and existing facilities that request coverage under this permit must have a stormwater pollution prevention plan (SWPPP) prepared and implemented in accordance with part 4 of this permit, prior to NOI submittal. For those permittees switching coverage from the expiring TMSP, existing SWPPPs will satisfy the requirement to have a plan developed before the NOI is signed, when modified as necessary in accordance with section 4.1.4. Do not include a copy of the SWPPP with the NOI submission, except as required by subpart 4.6 of this permit.

2.3. Where to Submit

Facilities that discharge stormwater associated with industrial activity must use an NOI form provided by the division (or a copy thereof). NOIs must be signed in accordance with subpart

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

7.7 below (Signatory Requirements) of this permit. NOIs are to be submitted to the division at the following address:

**Stormwater NOI Processing
Division of Water Resources
William R. Snodgrass - Tennessee Tower
312 Rosa L. Parks Avenue, 11th Floor
Nashville, Tennessee 37243**

2.4. Electronic Submission of NOIs

The division supports and encourages submission of electronic documents (e.g., scanned NOIs submitted as PDF files) by using a dedicated email address:

Water.Permits@tn.gov

If the division notifies dischargers (directly by mail or E-mail, by public notice, or by making information available on the Internet) of other NOI form options that become available at a later date (e.g., direct online submission of forms), the permittees may take advantage of those options to satisfy the NOI notification requirements.

3. SPECIAL CONDITIONS

3.1. Prohibition of Non-stormwater Discharges

3.1.1. Stormwater Discharges

All discharges covered by this permit shall be composed entirely of stormwater except as allowed in section 3.1.2 below.

3.1.2. Allowable Non-Stormwater Discharges

Discharges of material other than stormwater must be in compliance with an NPDES permit (other than this permit and as listed below) issued for the discharge. This permit authorizes the following non-stormwater discharges:

- Fire hydrant flushings;
- Potable water including water line flushings;
- Uncontaminated air conditioning or compressor condensate;
- Irrigation drainage;
- Landscape watering provided all pesticides, herbicides, and fertilizer have been applied in accordance with manufacturer's instructions;
- Washing of sidewalks, buildings, etc. to which no detergents have been added; wash water should also be free of any other pollutants such as sediment, debris, etc.
- Uncontaminated ground water or spring water;
- Foundation or footing drains where flows are not contaminated with process materials such as solvents;
- Incidental windblown mist from cooling towers that collects on rooftops or adjacent portions of your facility, but NOT intentional discharges from the cooling tower (e.g., "piped" cooling tower blowdown or drains).

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

- Discharges from wet deck storage areas, which are authorized only if no chemical additives are used in the spray water or applied to the logs.

The facility's SWPPP shall include a certification that the discharge has been tested or evaluated for the presence of non-storm water discharges. The certification shall include the identification of potential significant sources of non-storm water at the site, a description of the results of any test and/or evaluation for the presence of non-storm water discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7. of this permit.

3.2. Releases in Excess of Reportable Quantities

3.2.1. Hazardous Substances or Oil

The discharge of hazardous substances or oil in the stormwater discharge(s) from a facility shall be prevented or minimized in accordance with the applicable SWPPP for the facility. This permit does not relieve the permittee of the reporting requirements of 40 CFR Part 117 and 40 CFR Part 302. Except as provided in section 3.2.2 (Multiple Anticipated Discharges) of this permit, where a release containing a hazardous substance in an amount equal to or in excess of a reporting quantity established under either 40 CFR Part 117 or 40 CFR Part 302, occurs during a 24-hour period:

- The discharger is required to notify the National Response Center (NRC) at 1-800-424-8802, the Tennessee Emergency Management Agency (TEMA) at 1-800-262-3300 or (615) 741-0001, and the appropriate division's Environmental Field Office (see list of EFOs under subpart 3.3 on page 14 of this permit), in accordance with the requirements of 40 CFR Part 117 and 40 CFR Part 302, as soon as he or she has knowledge of the discharge;
- The SWPPP required under part 4 (Stormwater Pollution Prevention Plans) of this permit must be modified within 14 calendar days of knowledge of the release to provide a description of the release, the circumstances leading to the release, and the date of the release. In addition, the SWPPP must be reviewed by the permittee to identify measures to prevent the reoccurrence of such releases and to respond to such releases, and the SWPPP must be modified where appropriate; and
- The permittee shall submit within 14 calendar days of knowledge of the release a written description of the release (including the type and estimate of the amount of material released), the date that such release occurred, the circumstances leading to the release, and steps to be taken in accordance with this section (3.2.1 above) of this permit to the appropriate division's Environmental Field Offices (see list of EFOs under subpart 3.3 on page 14 of this permit).

3.2.2. Multiple Anticipated Discharges

Facilities that have more than one anticipated discharge per year containing the same hazardous substance in an amount equal to or in excess of a reportable quantity established under either

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

40 CFR Part 117 or 40 CFR Part 302, that occurs during a 24-hour period, where the discharge is caused by events occurring within the scope of the relevant operating system shall:

- Submit notifications in accordance with section (3.2.1 above) of this permit for the first such release that occurs during a calendar year (or for the first year of this permit, after submittal of an NOI); and
- Shall provide in the SWPPP required under part 4 (Stormwater Pollution Prevention Plans) a written description of the dates on which all such releases occurred, the type and estimate of the amount of material released, and the circumstances leading to the releases. In addition, the SWPPP must be reviewed to identify measures to prevent or minimize such releases and the SWPPP must be modified where appropriate.

3.2.3. Spills

This permit does not authorize the discharge of hazardous substances or oil resulting from an onsite spill.

3.3. List of the Division's Environmental Field Offices (EFOs) and Counties

EFO Name	EFO Address	List of Counties
Chattanooga	Division of Water Resources 1301 Riverfront Parkway, Suite #206 Chattanooga, TN 37402 (423) 634-5745	Bledsoe, Bradley, Grundy, Hamilton, McMinn, Marion, Meigs, Polk, Rhea, Sequatchie
Columbia	Division of Water Resources 1421 Hampshire Pike Columbia, TN 38401 (931) 380-3371	Bedford, Coffee, Franklin, Giles, Hickman, Lawrence, Lewis, Lincoln, Marshall, Maury, Moore, Perry, Wayne
Cookeville	Division of Water Resources 1221 South Willow Ave Cookeville, TN 38506 (931) 432-4015	Cannon, Clay, DeKalb, Fentress, Grundy, Jackson, Macon, Overton, Pickett, Putnam, Smith, Trousdale, Van Buren, Warren, White
Jackson	Division of Water Resources 1625 Hollywood Dr Jackson, TN 38305 (731) 512-1300	Benton, Carroll, Chester, Crockett, Decatur, Dyer, Gibson, Hardeman, Hardin, Haywood, Henderson, Henry, Lake, Lauderdale, McNairy, Madison, Obion, Weakly
Johnson City	Division of Water Resources 2305 Silverdale Rd Johnson City, TN 37601 (423) 854-5400	Carter, Greene, Hancock, Hawkins, Johnson, Sullivan, Unicoi, Washington Counties
Knoxville	Division of Water Resources 3711 Middlebrook Pike Knoxville, TN 37921 (865) 594-6035	Anderson, Blount, Campbell, Claiborne, Cocke, Cumberland, Grainger, Hamblen, Jefferson, Knox, Loudon, Monroe, Morgan, Roane, Scott, Sevier, Union
Memphis	Division of Water Resources 8383 Wolf Lake Drive Bartlett, TN 38133 (901) 371-3000	Fayette, Shelby, Tipton

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

EFO Name	EFO Address	List of Counties
Nashville	Division of Water Resources 711 R.S. Gass Boulevard Nashville, TN 37206 (615) 681-7000	Cheatham, Davidson, Dickson, Houston, Humphreys, Montgomery, Robertson, Rutherford, Stewart, Sumner, Williamson, Wilson

All Environmental Field Offices (EFOs) may be reached by telephone at the toll-free number 1-888-891-8332 (TDEC).

3.4. Co-located Industrial Activity

In the case where a facility has industrial activities occurring onsite which are described by any of the activities in other sections of part 11 of this permit, those industrial activities are considered to be co-located industrial activities. A facility with a primary industrial activity that is required to obtain coverage under TMSP is also required to comply with requirements that apply to other activities at the facility if those additional activities would require coverage if considered on their own. There may be specific monitoring and SWPPP requirements associated with each industrial sector. Permittees must comply with all requirements related to each activity. The operator of the facility shall determine which additional pollution prevention plan and monitoring requirements are applicable to the co-located industrial activity by examining the narrative descriptions of each coverage section (Discharges Covered Under This Section) in part 11 of this permit. Provisions under this part are applicable on an outfall-specific basis.

4. STORMWATER POLLUTION PREVENTION PLAN (SWPPP)

A stormwater pollution prevention plan (SWPPP) shall be developed for each facility covered by this permit. SWPPPs shall be prepared in accordance with good engineering practices and in accordance with the factors outlined in 40 CFR 125.3(d)(2) or (3) as appropriate. The SWPPP shall identify potential sources of pollution that may reasonably be expected to affect the quality of stormwater discharges associated with industrial activity from the facility. In addition, the SWPPP shall describe and ensure the implementation of practices that are to be used to minimize the pollutants in stormwater discharges associated with industrial activity at the facility and to assure compliance with the terms and conditions of this permit. The term ‘minimize’ means reduce and/or eliminate to the extent achievable using control measures (including best management practices) that are technologically available and economically practicable and achievable in light of best industry practice. Facilities must implement the provisions of the SWPPP required under this part as a condition of this permit. For additional information to assist permittees in complying with these permit conditions and in the preparation of the SWPPP, see Addendum C (List of Applicable References).

4.1. Deadlines for Plan Preparation and Compliance

4.1.1. Existing Facilities

Except as provided in sections 4.1.3, 4.1.4 and 4.1.5 (below), all facilities seeking coverage under the new TMSP who were previously covered by the expiring TMSP shall continue to implement the SWPPP developed under the expiring permit. The SWPPP shall be modified to address additional requirements in the new permit no later than 60 days following the effective date of this permit. The revisions made to the SWPPP shall be implemented within 180 days following the effective date of this permit, except where new construction is required, in which

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

case the construction must be completed within 1 year following the effective date of this permit.

4.1.2. New Facilities

Except as provided in sections 4.1.3, 4.1.4 and 4.1.5 (below), all new facilities shall prepare and implement their SWPPP prior to submitting the Notice of Intent. A copy of the SWPPP shall be submitted with the Notice of Intent, preferably in electronic format (PDF).

4.1.3. Oil and Gas Operations

Oil and gas exploration, production, processing or treatment operations or transmission facilities that are not required to submit a permit application on or before May 31, 1997, in accordance with 40 CFR 122.26(c)(1)(iii), but after May 31, 1997, have a discharge of a reportable quantity of oil or a hazardous substance for which notification is required pursuant to either 40 CFR 110.6, 40 CFR 117.21 or 40 CFR 302.6, shall prepare and implement the SWPPP on or before the date 60 calendar days after first knowledge of such release.

4.1.4. Facilities Switching from Coverage Under an Individual NPDES permit to this General Permit

Facilities previously subject to an individual NPDES permit that switch to coverage under this permit shall continue to implement the SWPPP required by that permit. The SWPPP shall be revised as necessary to address requirements under part 11 of this permit no later than 180 days following the switch to this general permit. The revisions made to the SWPPP shall be implemented on or before 1 year following the date of the switch. The antibacksliding provisions, as contained in Section 402(o) of the Clean Water Act and codified in the NPDES regulations at 40 CFR §122.44 (l) - *Reissued permits*, shall apply to the facilities previously subject to an individual NPDES permit that switch to coverage under this permit.

4.1.5. Measures That Require Construction

In cases where construction is necessary, the SWPPP shall contain a schedule that provides compliance with the SWPPP as expeditiously as practicable, but no later than 2 years following the effective date of this permit. Where a construction compliance schedule is included in the SWPPP, the schedule shall include appropriate non-structural and/or temporary controls to be implemented in the affected portion(s) of the facility prior to completion of the permanent control measure.

Operators of construction sites involving clearing, grading or excavation that results in an area of disturbance of one or more acres, and activities that result in the disturbance of less than one acre if it is part of a larger common plan of development or sale must obtain coverage under the [Construction General Permit](#).

4.1.6. Extensions

Upon a showing of good cause, the division may establish a later date in writing for preparing and compliance with a SWPPP for a stormwater discharge associated with industrial activity.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

4.2. Signature and Plan Review

4.2.1. Signature/Location

The SWPPP shall be signed in accordance with subpart 7.7 (Signatory Requirements), and be retained onsite at the facility that generates the stormwater discharge in accordance with section 7.14.2 (Retention of Records) of this permit. For inactive facilities, the SWPPP may be kept at the nearest office of the permittee.

4.2.2. Availability

Except as provided in section 4.1.2 – New Facilities (above), the permittee shall make the NOC, SWPPP, annual site compliance inspection report, or other information available upon request to the division; the EPA; the U.S. Fisheries and Wildlife Service Regional Director; the Tennessee Wildlife Resources Agency; or authorized representatives of these officials. A copy of these documents shall be located at the facility.

4.2.3. Required Modifications

The director of the Division of Water Resources, or authorized representative, may notify the permittee at any time that the SWPPP does not meet one or more of the minimum requirements of this part. Such notification shall identify those provisions of the permit that are not being met by the SWPPP, and identify which provisions of the SWPPP require modification in order to meet the minimum requirements of this part. Within 60 days of such notification from the director, (or as otherwise provided by the division), or authorized representative, the permittee shall make the required changes to the SWPPP and shall submit to the division a written certification that the requested changes have been made.

4.3. Keeping Plans Current

The permittee shall amend the stormwater pollution prevention plan (SWPPP) annually or as follows:

- Whenever there is a change in design, construction, operation, or maintenance, that has a significant effect on the potential for the discharge of pollutants to the waters of the state;
- If the SWPPP proves to be ineffective in eliminating or significantly minimizing pollutants from sources identified under subpart 4.4 (Contents of the Plan) of this permit; or
- If the SWPPP proves to be ineffective in otherwise achieving the general objectives of controlling pollutants in stormwater discharges associated with industrial activity.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring pursuant to the Monitoring and Reporting Requirements applicable to each sector of this permit. The evaluation should be done following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in part 11 for that particular industry. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office (EFO) in writing, within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must:

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

- Review its SWPPP, make any modifications or additions to the SWPPP which would assist in reducing specific effluent concentrations which are equal to less than the monitoring benchmarks for that facility, and
- Submit to the division's local EFO a brief summary of the proposed SWPPP modifications (including a timetable for implementation).

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

New owners shall review the existing SWPPP and make appropriate changes using the same timetable as described above. Amendments and modifications to the SWPPP may be reviewed by the division in the same manner as in subpart 4.2.

4.4. Contents of the Plan

The contents of the SWPPP shall comply with the requirements listed in the appropriate subpart (sector) of part 11 (Specific Requirements for Industrial Activities). These requirements are cumulative. If a facility has co-located activities that are covered in more than one subpart (sector) of part 11, that facility's SWPPP must comply with the requirements listed in all applicable subparts (sectors) of this permit.

4.5. Additional Pollution Prevention Plan Requirements

In addition to the minimum standards listed in part 11 of this permit (Specific Requirements for Industrial Activities), the SWPPP shall include a complete discussion of measures taken to conform with the following applicable guidelines, other effective stormwater pollution prevention procedures, and applicable State rules, regulations and guidelines:

4.5.1. Additional Requirements for Stormwater Discharges Associated With Industrial Activity that Discharge Into or Through Permitted Municipal Separate Storm Sewer Systems (MS4)

In addition to the applicable requirements of this permit, facilities covered by this permit must comply with applicable requirements in municipal stormwater management programs developed under NPDES permits issued for the discharge of the municipal separate storm sewer system (MS4) that receives the facility's discharge, provided the discharger has been notified of such conditions.

Permittees that discharge stormwater associated with industrial activity through a MS4, or a municipal system designated by the division, shall make SWPPPs available to the municipal operator of the system upon request.

Coverage under the TMSP does not serve to waive any required/applicable local floodplain protection permitting requirements.

Off-site vehicle tracking of significant materials and the generation of dust shall be minimized. A stabilized site access (a point of entrance/exit to a facility) shall be described and implemented, as needed, to reduce the tracking of significant materials onto public roads by

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

construction vehicles. Facilities cannot use the public roadways/right-of-ways or MS4 as their primary, ongoing site exit control.

4.5.2. Additional Requirements for Stormwater Discharges Associated With Industrial Activity from Facilities Subject to Emergency Planning and Community Right to Know Act (EPCRA) Section 313 Requirements

Potential pollutant sources for which you have reporting requirements under EPCRA 313 must be identified in your risk identification and summary of potential pollutant sources determination as required under each industrial sector in this permit. Note this requirement only applies to you if you are subject to reporting requirements under EPCRA 313.

4.5.3. Additional Requirements for Salt Storage

Storage piles of salt used for deicing or other commercial or industrial purposes and that generate a stormwater discharge associated with industrial activity that is discharged to waters of the state shall be enclosed or covered to prevent exposure to precipitation, except for exposure resulting from adding or removing materials from the pile. Dischargers shall be compliant with this provision upon submittal of the NOI. Piles do not need to be enclosed or covered where stormwater from the pile is not discharged to waters of the state.

4.5.4. Consistency with Other Plans

SWPPPs may reference the existence of other plans for Spill Prevention Control and Countermeasure (SPCC) plans developed for the facility under Section 311 of the CWA or Best Management Practices (BMP) Programs otherwise required by an NPDES permit for the facility as long as such requirement is incorporated into the SWPPP.

4.5.5. Use of Pavement Sealant Products

Use of asphalt-based instead of tar-based pavement sealant products is encouraged to minimize discharge of PAHs from industrial facilities. Additionally, painting is not recommended under wet weather conditions.

4.6. **Additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters**

If the division has notified the facility operator that the estimated pollutant load is consistent with the TMDL and that the proposed stormwater discharges meet the eligibility requirements of the TMSP and may be authorized under this permit, additional SWPPP requirements shall apply. Additional SWPPP requirements for discharges into waters with unavailable parameters for a parameter present in the facility's stormwater runoff, or discharges upstream of waters impaired by the same parameter, that may affect the waters with unavailable parameters; and for discharges to waters identified by the department as Exceptional Tennessee waters, or discharges upstream of Exceptional Tennessee waters, that may affect the Exceptional Tennessee waters, are as follows:

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

The SWPPP shall be submitted to the appropriate division's Environmental Field Office (see list of EFOs under subpart 3.3 on page 14). This SWPPP may be submitted with the NOI, but must be submitted prior to commencement of new industrial activities, or a change of industrial activity that would cause an increase of pollutant loading from the site into waters with unavailable parameters or Exceptional Tennessee waters.

The permittee shall perform, at a minimum, monthly inspections.

The monthly inspection shall be conducted by the qualified personnel who shall inspect the areas of facility used for storage of significant materials that are exposed to precipitation, as well as structural and non-structural control measures at the site. Areas used for storage of significant materials that are exposed to precipitation shall be inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Outfall points (where discharges from the site enter into the waters with unavailable parameters or Exceptional Tennessee waters) shall be inspected (including, but not limited to, visual observations) to determine whether structural and non-structural control measures are effective in preventing significant impacts to receiving waters. Where discharge locations are inaccessible, nearby downstream locations shall be inspected if possible.

Based on the results of the inspection, any inadequate control measures or control measures in disrepair shall be replaced or modified, or repaired as necessary, before the next rain event if possible, but in no case more than seven days after the need is identified. If maintenance prior to the next anticipated storm event is impracticable, maintenance must be scheduled and accomplished as soon as practicable.

Based on the results of the inspection, the facility description and pollution prevention measures identified in the SWPPP shall be revised as appropriate, but in no case later than 14 calendar days following the inspection. Such modifications shall provide for timely implementation of any changes to the SWPPP in no case later than 60 calendar days following the inspection.

Inspections shall be documented and include the scope of the inspection, name(s) and title or qualifications of personnel making the inspection, the date(s) of the inspection, major observations relating to the implementation of the stormwater pollution prevention plan (including the location(s) of discharges of pollutants from the site and of any control device that failed to operate as designed or proved inadequate for a particular location), and actions taken to prevent further discharge of pollutants from the site.

The permittee must certify on a quarterly basis that inspections of structural and non-structural control measures and of outfall points were performed and whether or not all planned and designed pollution prevention controls measures are installed and in working order. The certification must be done by a person who meets the signatory requirements of this permit. The certification should be kept with the facility's SWPPP, shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit and has to be submitted to the local Environmental Field Office upon request.

If the division finds that a discharge is causing a violation of water quality standards or causing or contributing to the impairment of a known water with unavailable parameters or any water, and finds that the discharger is complying with SWPPP requirements of this permit, the discharger will be notified by the director in writing that the discharge is no longer eligible for coverage under the general permit and that continued discharges must be covered by an

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

individual permit. To obtain the individual permit, the operator must file an individual NPDES permit application.

5. NUMERIC EFFLUENT LIMITATIONS

5.1. Discharges Associated With Specific Industrial Activity

Numeric effluent limitations for stormwater discharges associated with a specific industrial activity are described in part 11 of this permit.

5.2. Coal Pile Runoff

Any stormwater discharge composed of coal pile runoff shall not exceed a maximum concentration for any time of 50 mg/L total suspended solids (TSS). Coal pile runoff shall not be diluted with stormwater or other flows in order to meet this limitation. The pH of such discharges shall be within the range of 6.0 to 9.0. Runoff from coal piles shall be compliant with this provision upon submittal of the NOI. Any untreated overflow from facilities designed, constructed and operated to treat the volume of coal pile runoff that is associated with a 10-year, 24-hour rainfall event shall not be subject to the 50 mg/L limitation for total suspended solids.

6. MONITORING AND REPORTING REQUIREMENTS

6.1. Monitoring Requirements

6.1.1. Limitations on Monitoring Requirements

Those facilities with discharges or activities identified in subpart 6.4 and part 11 are required to conduct sampling of their stormwater discharges associated with industrial activity. Monitoring requirements under subpart 6.4 and part 11 are additive. Facilities with discharges or activities described in more than one monitoring section are subject to all applicable monitoring requirements from each section.

The director can provide written notice to any facility otherwise exempt from the sampling requirements of subpart 6.4 and part 11 that it shall conduct discharge sampling for a specific monitoring frequency for specific parameters.

6.1.2. Additional Monitoring by the Permittee

If the permittee monitors any pollutant required to be monitored by this permit more frequently than required in subpart 6.4 and part 11, using approved analytical methods as specified herein, the results of such monitoring shall be included in the calculation and reporting of the values required in the TMSP Stormwater Monitoring Report form. Such increased frequency shall also be indicated on the form.

6.2. Reporting: Where to Submit

One signed copy of the Annual Stormwater Monitoring Report (see Addendum D) for the benchmark results or the Discharge Monitoring Report (DMR) (see Addendum E) for effluent numeric limitations results required under parts 11 and all other stormwater

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

monitoring reports required herein, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

Mining and Quarrying facilities only (Sectors J and H of part 11) should submit one signed copy of Annual Stormwater Monitoring Report (see Addendum D) required under part 11, and all other reports required herein, to the division's Mining Unit at the following address:

<p style="text-align: center;">Tennessee Division of Water Resources Mining Unit 3711 Middlebrook Pike Knoxville, TN 37921</p>
--

For each outfall, one Annual Stormwater Monitoring Report (see Addendum D) form must be submitted.

6.3. Electronic Submission of Reports

The division supports and encourages submission of electronic documents (e.g., scanned reports submitted as PDF files) by using a dedicated email address:

Water.Permits@tn.gov

If the division notifies dischargers (directly by mail or E-mail, by public notice, or by making information available on the Internet) of other Annual Stormwater Monitoring Reports (see Addendum D) required under part 11, and all other stormwater monitoring reports options that become available at a later date (e.g., electronic submission of forms or letters), the permittees may take advantage of those options to satisfy the reporting requirements.

6.4. Special Monitoring Requirements for Coal Pile Runoff

During the period beginning on the effective date and lasting through the expiration date of this permit, permittees with stormwater discharges containing coal pile runoff shall monitor such stormwater for pH and TSS (mg/L) at least annually (1 time per year). Permittees with discharges containing coal pile runoff must report in accordance with subpart 5.2 (Coal Pile Runoff - Numeric Effluent Limitations) and subpart 6.2 (Reporting: Where to Submit). In addition to the parameters listed above, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) samples; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event samples and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge samples.

6.4.1. Sample Type

For discharges containing coal pile runoff, data shall be reported for a grab sample. All samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable.

6.4.2. Sampling Waiver

When a discharger is unable to collect samples of coal pile runoff due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate subsequent qualifying storm event. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

6.4.3. Representative Discharge

When a facility has two or more outfalls containing coal pile runoff that, based on a consideration of the other industrial activity, and significant materials, and upon management practices and activities within the area drained by the outfall, and the permittee reasonably believes substantially identical effluents are discharged, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfalls provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area (e.g., low (under 40 percent), medium (40 to 65 percent) or high (above 65 percent)) shall be provided in the SWPPP. Permittees required to submit monitoring information under part 8 of this permit shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the Annual Stormwater Monitoring Report (see Addendum D). This representative discharge provision is not applicable to stormwater discharges from coal piles regulated under the national effluent limitations guidelines.

6.4.4. Alternative Certification

Facilities with stormwater discharges containing coal pile runoff may not submit alternative certification in lieu of the required monitoring data.

6.4.5. When to Submit

Permittees with discharges containing coal pile runoff shall submit monitoring results annually no later than the 31st day of January.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

7. STANDARD PERMIT CONDITIONS

7.1. Duty to Comply

7.1.1. Permittee's Duty to Comply

The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Clean Water Act (CWA) and/or the Tennessee Water Quality Control Act (TWQCA) is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application.

7.1.2. Penalties for Violations of Permit Conditions

Pursuant to T.C.A. 69-3-115 of The Tennessee Water Quality Control Act of 1977, as amended:

Any person who violates an effluent standard or limitation or a water quality standard established under this part (T.C.A. 69-3-101, et.seq.); violates the terms or conditions of this permit; fails to complete a filing requirement; fails to allow or perform an entry, inspection, monitoring or reporting requirement; violates a final determination or order of the board, panel or commissioner; or violates any other provision of this part or any rule or regulation promulgated by the board, is subject to a civil penalty of up to ten thousand dollars (\$10,000) per day for each day during which the act or omission continues or occurs;

Any person unlawfully polluting the waters of the state or violating or failing, neglecting, or refusing to comply with any of the provisions of this part (T.C.A. 69-3-101, et.seq.) commits a Class C misdemeanor. Each day upon which such violation occurs constitutes a separate offense;

Any person who willfully and knowingly falsifies any records, information, plans, specifications, or other data required by the board or the commissioner, or who willfully and knowingly pollutes the waters of the state, or willfully fails, neglects or refuses to comply with any of the provisions of this part (T.C.A. 69-3-101, et.seq.) commits a Class E felony and shall be punished by a fine of not more than twenty-five thousand dollars (\$25,000) or incarceration, or both.

Nothing in this permit shall be construed to relieve the discharger from civil or criminal penalties for noncompliance. Notwithstanding this permit, the discharger shall remain liable for any damages sustained by the State of Tennessee, including but not limited to fish kills and losses of aquatic life and/or wildlife, as a result of the discharge of stormwater to any surface or subsurface waters. Additionally, notwithstanding this permit, it shall be the responsibility of the discharger to conduct its stormwater treatment and/or discharge activities in a manner such that public or private nuisances or health hazards will not be created. Furthermore, nothing in this permit shall be construed to preclude the State of Tennessee from any legal action or relieve the discharger from any responsibilities, liabilities, or penalties established pursuant to any applicable State law or the Federal Water Resources Act.

7.2. Continuation of the Expired General Permit

An expired general permit continues in force and effect until a new general permit is issued. Permittees that choose, or are required, to obtain an individual permit must submit an

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

application (Forms 1 and 2F and any other applicable forms) 180 days prior to expiration of this permit. Permittees that are eligible and choose to be covered by a new general permit must submit an NOI by the date specified in that permit.

7.3. Need to Halt or Reduce Activity Not a Defense

It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

7.4. Duty to Mitigate

The permittee shall take all reasonable steps to minimize or prevent any discharge in violation of this permit that has a reasonable likelihood of adversely affecting human health or the environment.

7.5. Duty to Provide Information

The permittee shall furnish to the division, within a time specified by the division, any information that the division may request to determine compliance with this permit. The permittee shall also furnish to the division upon request, copies of records required to be kept by this permit.

7.6. Other Information

When the permittee becomes aware that he or she failed to submit any relevant facts or submitted incorrect information in the NOI or in any other report to the division, he or she shall promptly (or within the specified time frame as identified by the division) submit such facts or information.

7.7. Signatory Requirements

All Notices of Intent (NOI), requests for termination of permit coverage, stormwater pollution prevention plans, reports, certifications or information either submitted to the division (and/or the operator of a permitted municipal separate storm sewer system), or that this permit requires be maintained by the permittee, shall be signed.

7.7.1. Signatory Requirements for a Notice of Intent

The Notice of Intent shall be signed as follows:

For a corporation. By a responsible corporate officer. For the purpose of this section, a responsible corporate officer means:

- (1) A president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy or decision-making functions for the corporation, or
- (2) the manager of one or more manufacturing, production, or operating facilities, provided, the manager is authorized to make management decisions which govern

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

the operation of the regulated facility including having the explicit or implicit duty of making major capital investment recommendations, and initiating and directing other comprehensive measures to assure long term environmental compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures.

NOTE: The division does not require specific assignments or delegations of authority to responsible corporate officers. The division will presume that these responsible corporate officers have the requisite authority to sign permit applications unless the corporation has notified the Director to the contrary. Corporate procedures governing authority to sign permit applications may provide for assignment or delegation to applicable corporate positions rather than to specific individuals.

For a partnership or sole proprietorship. By a general partner or the proprietor, respectively; or

For a municipality, State, Federal, or other public agency. By either a principal executive officer or ranking elected official. For purposes of this section, a principal executive officer of a Federal agency includes: (i) The chief executive officer of the agency, or (ii) a senior executive officer having responsibility for the overall operations of a principal geographic unit of the agency (e.g., Regional Administrators of EPA).

7.7.2. Signatory Requirements for Reports

All reports required by the permit and other information requested by the division shall be signed as follows:

All reports required by permits, and other information requested by the Director shall be signed by a person described in section 7.7.1 (Signatory Requirements for a Notice of Intent) of this part, or by a duly authorized representative of that person. A person is a duly authorized representative only if:

- (1) The authorization is made in writing by a person described in section 7.7.1 (Signatory Requirements for a Notice of Intent) of this part;
- (2) The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity such as the position of plant manager, operator of a well or a well field, superintendent, position of equivalent responsibility, or an individual or position having overall responsibility for environmental matters for the company, (A duly authorized representative may thus be either a named individual or any individual occupying a named position.) and,
- (3) The written authorization is submitted to the director.

7.7.3. Changes to authorization

If an authorization under paragraph 7.7.2 (2) of this section is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of paragraph 7.7.2 (2) of this section must be

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

submitted to the director prior to or together with any reports, information, or applications to be signed by an authorized representative.

7.7.4. Certification

Any person signing a document under paragraph 7.7.2 (1) or (2) of this section shall make the following certification:

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. As specified in Tennessee Code Annotated Section 39-16-702(a)(4), this declaration is made under penalty of perjury."

7.7.5. Penalties for Falsification of Reports

Section 309c(4) of the Clean Water Act (CWA) provides that any person who knowingly makes any false material statement, representation, or certification in any record or other document submitted or required to be maintained under this permit, including reports of compliance or noncompliance shall, upon conviction, be punished by a fine of not more than \$10,000, or by imprisonment for not more than two years, or by both.

7.8. Oil and Hazardous Substance Liability

Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties to which the permittee is or may be subject under Section 311 of the Clean Water Act (CWA) or Section 106 of the Comprehensive Environmental Response, Compensation and Liability Act of 1980 (CERCLA).

7.9. Property Rights

The issuance of this permit does not convey any property rights of any sort, nor any exclusive privileges, nor does it authorize any injury to private property nor any invasion of personal rights, nor any infringement of Federal, State, or local laws or regulations.

7.10. Severability

The provisions of this permit are severable, and if any provision of this permit, or the application of any provision of this permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of this permit shall not be affected thereby.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

7.11. Requiring an Individual Permit or an Alternative General Permit

7.11.1. Division of Water Resources Designation

The division may require any person authorized by this permit to apply for and/or obtain either an individual NPDES permit or an alternative NPDES general permit. Any interested person may petition the division to take action under this section. The division may require any owner or operator authorized to discharge under this permit to apply for an individual NPDES permit only if the owner or operator has been notified in writing that a permit application is required. This notice shall include a brief statement of the reasons for this decision, an application form, a statement setting a deadline for the owner or operator to file the application, and a statement that on the effective date of issuance or denial of the individual NPDES permit or the alternative general permit as it applies to the individual permittee, coverage under this general permit shall automatically terminate. Individual permit applications shall be submitted to the address shown in the list of EFOs under subpart 3.3 on page 14 of this permit for the division's Environmental Field Office responsible for the county where the facility is located. The division may grant additional time to submit the application upon request of the applicant. If an owner or operator fails to submit in a timely manner an individual NPDES permit application as required by the division, then the applicability of this permit to the individual NPDES permittee is automatically terminated at the end of the day specified for application submittal.

7.11.2. Individual Permit Application

Any owner or operator authorized by this permit may request to be excluded from the coverage of this permit by applying for an individual NPDES permit. The owner or operator shall submit an [individual application](#) (Form 1 and Form 2F) with reasons supporting the request to the division. Individual permit applications shall be submitted to the address of the appropriate division's Environmental Field Office (see list of EFOs under subpart 3.3 on page 14 of this permit). The request may be granted by the issuance of any individual permit or an alternative general permit if the reasons cited by the owner or operator are adequate to support the request.

7.11.3. Individual/Alternative General Permit Issuance

When an individual NPDES permit is issued to an owner or operator otherwise subject to this permit, or the owner or operator is authorized for coverage under an alternative NPDES general permit, the applicability of this permit to the individual NPDES permittee is automatically terminated on the effective date of the individual permit or the date of authorization of coverage under the alternative general permit, whichever the case may be. When an individual NPDES permit is denied to an owner or operator otherwise subject to this permit, or the owner or operator is denied for coverage under an alternative NPDES general permit, the applicability of this permit to the individual NPDES permittee is automatically terminated on the date of such denial, unless otherwise specified by the division.

7.12. State/Environmental Laws

Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties established pursuant to any applicable Tennessee law or regulation under authority preserved by Section 510 of the Act.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

No condition of this permit shall release the permittee from any responsibility or requirements under other environmental statutes or regulations.

7.13. Proper Operation and Maintenance

The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related equipment) that are installed or used by the permittee to achieve compliance with the conditions of this permit and with the requirements of SWPPPs. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. Proper operation and maintenance requires the operation of backup or auxiliary facilities or similar systems, installed by a permittee only when necessary to achieve compliance with the conditions of the permit.

7.14. Monitoring and Records

7.14.1. Representative Samples/Measurements

Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity.

7.14.2. Retention of Records

The permittee shall retain records of all monitoring information, copies of all reports required by this permit, and records of all data used to complete the application of this permit for a period of at least three (3) years from the date of sample, measurement, evaluation or inspection, report, or application. This period may be extended by request of the division at any time. Permittees must submit any such records to the division upon request.

The permittee shall retain the SWPPP developed in accordance with parts 4 and 11 of this permit until a date 3 years after the last modification or amendment is made to the SWPPP, and at least 1 year after coverage under this permit terminates.

7.14.3. Records Contents

Records of monitoring information shall include:

- The date, exact place, and time of sampling or measurements;
- The initials or name(s) of the individual(s) who performed the sampling or measurements;
- The date(s) analyses were performed;
- The time(s) analyses were initiated;
- The initials or name(s) of the individual(s) who performed the analyses;
- References and written procedures, when available, for the analytical techniques or methods used; and
- The results of such analyses, including the bench sheets, instrument readouts, computer disks or tapes, etc., used to determine these results.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

7.14.4. **Approved Monitoring Methods**

Monitoring must be conducted according to test procedures approved under 40 CFR Part 136, unless other test procedures have been specified in this permit.

7.15. Inspection and Entry

The permittee shall allow the division or an authorized representative of the division, or, in the case of a facility that discharges through a municipal separate storm sewer, an authorized representative of the municipal operator or the separate storm sewer receiving the discharge, upon the presentation of credentials and other documents as may be required by law, to: enter upon the permittee's premises where a regulated facility or activity is located or conducted or where records must be kept under the conditions of this permit; have access to and copy at reasonable times, any records that must be kept under the conditions of this permit; and inspect at reasonable times any facilities or equipment (including monitoring and control equipment).

7.16. Permit Actions

This permit may be modified, revoked and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition.

7.17. Bypass of Treatment Facility

7.17.1. **Notice**

Anticipated Bypass. If a permittee subject to the numeric effluent limitations of parts 5 and 11 of this permit knows in advance of the need for a bypass, he or she shall submit prior notice, if possible, at least 10 days before the date of the bypass; including an evaluation of the anticipated quality and effect of the bypass.

Unanticipated Bypass. The permittee subject to the numeric effluent limitations of parts 5 and 11 of this permit shall submit notice of an unanticipated bypass. Any information regarding the unanticipated bypass shall be provided orally within 24 hours from the time the permittee became aware of the circumstances. A written submission shall also be provided within 5 days of the time the permittee became aware of the circumstances. The written submission shall contain a description of the bypass and its cause; the period of the bypass; including exact dates and times, and if the bypass has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the bypass.

7.17.2. **Prohibition of Bypass**

Bypass is prohibited and the division may take enforcement action against a permittee for a bypass. Unless:

- (1) The bypass was unavoidable to prevent loss of life, personal injury, or severe property damage;

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

- (2) There were no feasible alternatives to the bypass, such as the use of auxiliary facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if the permittee should, in the exercise of reasonable engineering judgment, have installed adequate backup equipment to prevent a bypass that occurred during normal periods of equipment downtime or preventive maintenance; and
- (3) The permittee notified the division in accordance with section 7.17.1.

The division may approve an anticipated bypass after considering its adverse effects, if the division determines that it will meet the three conditions listed in paragraph 7.17.2.a) (above).

7.18. Upset Conditions

7.18.1. Affirmative Defense

An upset constitutes an affirmative defense to an action brought for noncompliance with technology-based numeric effluent limitations in parts 5 and 11 of this permit if the requirements of section 7.18.2 below are met. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is final administrative action subject to judicial review.

7.18.2. Required Defense

A permittee who wishes to establish the affirmative defense of an upset shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence, that:

An upset occurred and that the permittee can identify the specific cause(s) of the upset:

The permitted facility was at the time being properly operated; and

The permittee provided oral notice of the upset to the division within 24 hours from the time the permittee became aware of the circumstances. A written submission shall also be provided within 5 days of the time the permittee became aware of the circumstances. The written submission shall contain a description of the upset and its cause; the period of the upset; including exact dates and times, and if the upset has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the upset.

7.18.3. Burden of Proof

In any enforcement proceeding, the permittee seeking to establish the occurrence of an upset has the burden of proof.

8. REOPENER CLAUSE

8.1. Potential or Realized Impacts on Water Quality

If there is evidence indicating potential or realized impacts on water quality or on a listed endangered species due to any stormwater discharge associated with industrial activity covered by this permit, the owner or operator of such discharge may be required to obtain an individual

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

permit or an alternative general permit in accordance with subpart 7.11 (Requiring an Individual Permit or an Alternative General Permit) of this permit or the permit may be modified to include different limitations and/or requirements.

8.2. Applicable Regulations

Permit modification or revocation will be conducted according to 40 CFR 122.62, 122.63, 122.64, and 124.5.

9. TERMINATION OF COVERAGE

9.1. Notice of Termination

Where all stormwater discharges associated with industrial activity that are authorized by this permit are eliminated, or where the operator of stormwater discharges associated with industrial activity at a facility changes, the operator of the facility shall submit a written request for such termination that is signed in accordance with part 7.7 (Signatory Requirements) of this permit. The written notice shall include the following information:

- **Facility Information**
Name, mailing address, and location of the facility for which the notification is submitted;
- **Operator Information**
The name, address, and telephone number of the operator addressed by the notice;
- **Permit Tracking Number**
The NPDES permit tracking number (i.e. TNR05XXXX) for the stormwater discharge associated with industrial activity identified by the notice;
- **Reason for Termination**
An indication of whether the stormwater discharges associated with industrial activity have been eliminated or the operator of the discharges has changed; and
- **Certification**
The following certification signed in accordance with subpart 7.7 (Signatory Requirements) of this permit:

“I certify under penalty of law that all stormwater discharges associated with industrial activity from the identified facility that are authorized by an NPDES general permit have been eliminated or that I am no longer the operator of the industrial activity. I understand that by submitting this notice of termination, that I am no longer authorized to discharge stormwater associated with industrial activity under this general permit, and that discharging pollutants in stormwater associated with industrial activity to waters of the state is unlawful under the Clean Water Act where the discharge is not authorized by an NPDES permit. I also understand that the submittal of this notice of termination does not release an operator from liability for any violations of this permit or the Clean Water Act.”

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

9.2. Addresses

All written notices of termination are to be sent to the division's Environmental Field Office responsible for the county where the facility is located (see list of EFOs under subpart 3.3 on page 14 of this permit).

9.3. Electronic Submission of Notice of Termination

The division supports and encourages submission of electronic documents (e.g., scanned notices of termination submitted as PDF files) by using a dedicated email address:

Water.Permits@tn.gov

If the division notifies dischargers (directly by mail or E-mail, by public notice, or by making information available on the Internet) of other Notice of Termination options that become available at a later date (e.g., electronic submission of forms or letters), the permittees may take advantage of those options to satisfy the Notice of Termination notification requirements.

9.4. No Exposure Certification

The facility may discontinue permit coverage under the TMSP if it is eligible for the "no exposure" permit exemption. The "no exposure" permit exemption is a conditional exclusion applicable to all categories of industrial activity (except construction activity) with no exposure of industrial materials and activities to stormwater. All facilities with point source discharges of stormwater associated with industrial activity that satisfy criteria of no exposure and complete a no exposure certification form will be able to obtain exclusion from NPDES stormwater permitting under TMSP.

A condition of no exposure exists at an industrial facility when all industrial materials and activities are protected by a storm resistant shelter to prevent exposure to rain, snow, snowmelt, and/or runoff. Industrial materials or activities include, but are not limited to, material handling equipment or activities, industrial machinery, raw materials, intermediate products, by-products, final products, or waste products. Material handling activities include the storage, loading and unloading, transportation, or conveyance of any raw material, intermediate product, final product or waste product. A storm resistant shelter is not required for the following industrial materials and activities:

- Drums, barrels, tanks, and similar containers that are tightly sealed, provided those containers are not deteriorated and do not leak. "Sealed " means banded or otherwise secured and without operational taps or valves;
- Adequately maintained vehicles used in material handling; and
- Final products, other than products that would be mobilized in stormwater discharges (e.g., rock salt).

A no exposure certification must be provided for each facility qualifying for the no exposure exclusion. In addition, the exclusion from NPDES permitting is available on a facility-wide basis only, not for individual outfalls. If any industrial activities or materials are or will be exposed to precipitation, the facility is not eligible for the no exposure exclusion.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

No exposure certification renewals must be submitted five years from the time they are first submitted (assuming the facility still qualifies for the exemption). If conditions change at a facility such that renewed TMSP coverage is needed, the facility must submit an NOI requesting coverage.

Facilities that qualify for and submit a “no exposure” certification are no longer authorized by nor required to comply with this permit. Furthermore, facilities that are no longer required to have permit coverage due to a “no exposure” exclusion, are not required to submit a Notice of Termination.

A copy of no exposure certification form can be obtained by requesting a copy of the form at the address listed below, from the division’s Environmental Field Office responsible for the county where the facility is located (see list of EFOs under subpart 3.3 on page 14 of this permit), or at the department’s web page for the TMSP (<http://state.tn.us/environment/permits/strmh2o.shtml>). The division supports and encourages submission of electronic documents (e.g., scanned NOIs submitted as PDF files) by using a dedicated email address:

Water.Permits@tn.gov

Alternatively, the no exposure certification form shall be submitted to the division at the following address:

**Stormwater NOI Processing
Division of Water Resources
William R. Snodgrass - Tennessee Tower
312 Rosa L. Parks Avenue, 11th Floor
Nashville, Tennessee 37243**

10. DEFINITIONS AND LIST OF ACRONYMS

10.1. Definitions

Benchmarks: A guideline for facilities to measure their storm water monitoring results, so that if their sample results are above the established (benchmark values) they will know to implement BMPs and modify their SWPPP to bring the results back below the established value.

Best Management Practices ("BMPs") means schedules of activities, prohibitions of practices, maintenance procedures, and other management practices to prevent or reduce the pollution of waters of the state. BMPs also include treatment requirements, operating procedures, and practices to control facility site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage.

Bypass means the intentional diversion of waste streams from any portion of a treatment facility.

Coal pile runoff means the rainfall runoff from or through any coal storage pile.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

Co-located industrial activity means when a facility has industrial activities being conducted onsite that are described under more than one of the coverage sections of part 11 in this permit (Discharges Covered Under This Section). Facilities with co-located industrial activities shall comply with all applicable monitoring and pollution prevention plan requirements of each section in which a co-located industrial activity is described. Provisions under applicable co-located facilities sections should be applied on an outfall-specific basis.

CWA means Clean Water Act (formerly referred to as the Federal Water Resources Act or Federal Water Resources Act Amendments of 1972).

Commercial Treatment and Disposal Facilities means facilities that receive, on a commercial basis, any produced hazardous waste (not their own) and treat or dispose of those wastes as a service to the generators. Such facilities treating and/or disposing exclusively residential hazardous wastes are not included in this definition.

Director means the Director of the Division of Water Resources, or an authorized representative.

Exceptional Tennessee Waters are surface waters of the state of Tennessee that are identified by the department as Exceptional Tennessee waters in the Tennessee Rule 0400-40-3. Characteristics of Exceptional Tennessee waters are listed at Rule 0400-40-3-.06 of the official compilation - rules and regulations of the State of Tennessee. Characteristics include waters designated by the Water Quality Control Board as **Outstanding National Resource Waters** (ONRW); waters that provide habitat for ecologically significant populations of certain aquatic or semi-aquatic plants or animals; waters that provide specialized recreational opportunities; waters that possess outstanding scenic or geologic values; or waters where existing conditions are better than water quality standards. Exceptional Tennessee waters are sometimes referred to as Exceptional TN Waters or ONRW waters. A list of known Exceptional Tennessee Waters is available on the web at:
http://environment-online.state.tn.us:7654/pls/enf_reports/f?p=9034:34304

Flow-weighted composite sample means a composite sample consisting of a mixture of aliquots collected at a constant time interval, where the volume of each aliquot is proportional to the flow rate of the discharge.

Grab Sample is a single stormwater runoff sample of at least 100 milliliters collected at a randomly-selected time over a period not exceeding 15 minutes, collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The sample shall be collected at the period most representative of the total discharge, recognizing that a “first flush” sample would be the most accurate representation for various pollutants in the stormwater runoff.

Inactive Landfill is considered inactive when, on a permanent basis, it will no longer receive waste and has completed closure in accordance with any applicable Federal, State, and/or local requirements.

Land application unit means an area where wastes are applied onto or incorporated into the soil surface (excluding manure spreading operations) for treatment or disposal.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

Landfill means an area of land or an excavation in which wastes are placed for permanent disposal and that is not a land application unit, surface impoundment, injection well, or waste pile.

Landfill wastewater as defined in 40 CFR Part 445 (Landfills Point Source Category) is all wastewater associated with, or produced by, landfilling activities except for sanitary wastewater, non-contaminated stormwater, contaminated groundwater, and wastewater from recovery pumping wells. Landfill wastewater includes, but is not limited to, leachate, gas collection condensate, drained free liquids, laboratory derived wastewater, contaminated stormwater and contact wash water from washing truck, equipment, and railcar exteriors and surface areas which have come in direct contact with solid waste at the landfill facility. Non-contaminated stormwater runoff from landfill is stormwater which does not come into direct contact with landfill wastes, the waste handling and treatment areas, or landfill wastewater as defined in 40 CFR 445.2. Non-contaminated stormwater includes stormwater which flows off the cap, cover, intermediate cover, daily cover, and/or final cover of the landfill.

Leachate is a liquid that has passed through or emerged from solid waste and contains soluble, suspended, or miscible materials removed from such waste.

Large and medium municipal separate storm sewer system (MS4) means all municipal separate storm sewers that are either:

1. Located in an incorporated place (city) with a population of 100,000 or more as determined by the latest Decennial Census by the Bureau of Census (these cities are listed in Appendices F and G of 40 CFR Part 122); or
2. Located in the counties with unincorporated urbanized populations of 100,000 or more, except municipal separate storm sewers that are located in the incorporated places, townships or towns within such counties (these counties are listed in Appendices H and I of 40 CFR Part 122); or
3. Owned or operated by a municipality other than those described in paragraph (i) or (ii) and that are designated by the division as part of the large or medium municipal separate storm sewer system.

Lists of Phase I (large and Median size MS4s), and Phase II (small MS4s), can be found on the division's MS4 webpage: [Tennessee MS4](http://tn.gov/environment/dataviewers.shtml) and by using the division's Dataviewer application (<http://tn.gov/environment/dataviewers.shtml>)

Load Allocation (LA): The portion of a receiving water's loading capacity that is attributed either to one of its existing or future nonpoint sources of pollution or to natural background (40 CFR 130.2(g)).

Margin of Safety (MOS): The "MOS" accounts for uncertainty in the loading calculation. The MOS may not be the same for different water bodies due to differences in the availability and strength of data used in the calculations.

No exposure certification is a conditional exclusion applicable to all categories of industrial activity (except construction activity) with no exposure of industrial materials and activities to stormwater. All facilities with point source discharges of stormwater associated with industrial activity that satisfy criteria of no exposure and complete a no exposure certification form will be able to obtain exclusion from NPDES stormwater permitting under TMSP.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

Nonpoint Source: A nonpoint source is essentially any source of pollutant(s) that is not a point source. Examples are sheet flow from pastures and runoff from paved areas.

Point source means any discernible, confined, and discrete conveyance, including but not limited to, any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, landfill leachate collection system, vessel or other floating craft from which pollutants are or may be discharged. This term does not include return flows from irrigated agriculture or agricultural stormwater runoff.

Qualified personnel are those who possess the knowledge and skills to assess conditions and activities that could impact stormwater quality at your facility, and who can also evaluate the effectiveness of control measures.

Section 313 water priority chemical means a chemical or chemical categories that: 1) are listed at 40 CFR 372.65 pursuant to Section 313 of the Emergency Planning and Community Right-to-Know Act (EPCRA) (also known as Title III of the Superfund Amendments and Reauthorization Act (SARA) of 1986); 2) are present at or above threshold levels at a facility subject to EPCRA Section 313 reporting requirements; and 3) meet at least one of the following criteria: (i) are listed in Appendix D of 40 CFR Part 122 on either Table II (organic priority pollutants), Table III (certain metals, cyanides, and phenols) or Table V (certain toxic pollutants and hazardous substances); (ii) are listed as a hazardous substance pursuant to Section 311(b)(2)(A) of the CWA at 40 CFR 116.4; or (iii) are pollutants for which EPA has published acute or chronic water quality criteria. See Addendum A of this permit. This addendum is based on the final rulemaking EPA published in the Federal Register November 30, 1994.

Significant materials includes, but is not limited to: raw materials; fuels; materials such as solvents, detergents, and plastic pellets; finished materials such as metallic products; raw materials used in food processing or production; hazardous substances designated under Section 101(14) of CERCLA; any chemical the facility is required to report pursuant to EPCRA Section 313; fertilizers; pesticides; and waste products such as ashes, slag and sludge that have the potential to be released with stormwater discharges.

Significant spills includes, but is not limited to: releases of oil or hazardous substances in excess of reportable quantities under Section 311 of the Clean Water Act (see 40 CFR 110.10 and CFR 117.21) or Section 102 of CERCLA (see 40 CFR 302.4).

Storm water means stormwater runoff, snow melt runoff, and surface runoff and drainage.

Stormwater runoff associated with industrial activity means the discharge from any conveyance that is used for collecting and conveying stormwater and that is directly related to manufacturing, processing or raw materials storage areas at an industrial plant. The term does not include discharges from facilities or activities excluded from the NPDES program. For the categories of industries identified in paragraphs (i) through (x) of this definition, the term includes, but is not limited to, stormwater discharges from industrial plant yards; immediate access roads and rail lines used or traveled by carriers of raw materials, manufactured products, waste material, or by-products used or created by the facility; material handling sites; refuse sites; sites used for the application or disposal of process waste waters (as defined at 40 CFR Part 401); sites used for the storage and maintenance of material handling equipment; sites used for residual treatment, storage, or disposal; shipping and receiving areas; manufacturing buildings; storage areas (including tank farms) for raw materials, and intermediate and finished products; and areas where industrial activity has taken place in the past and significant materials

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

remain and are exposed to stormwater. For the categories of industries identified in paragraph (xi) of this definition, the term includes only stormwater discharges from all areas (except access roads and rail lines) listed in the previous sentence where material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, or industrial machinery are exposed to stormwater. For the purposes of this paragraph, material handling activities include the storage, loading and unloading, transportation, or conveyance of any raw material, intermediate product, finished product, by-product or waste product. The term excludes areas located on plant lands separate from the plant's industrial activities, such as office buildings and accompanying parking lots as long as the drainage from the excluded areas is not mixed with stormwater drained from the above described areas. Industrial facilities (including industrial facilities that are Federally, State, or municipally owned or operated that meet the description of the facilities listed in paragraphs (i) to (xi) of this definition) include those facilities designated under 122.26(a)(1)(v). The following categories of facilities are considered to be engaging in "industrial activity" for purposes of this subsection:

1. Facilities subject to stormwater effluent limitations guidelines, new source performance standards, or toxic pollutant effluent standards under 40 CFR Subchapter N (except facilities with toxic pollutant effluent standards that are exempted under category (xi) of this definition);
2. Facilities classified as Standard Industrial Classifications 24 (except 2434), 26 (except 265 and 267), 28 (except 283 and 285), 29, 311, 32 (except 323), 33, 3441, 373;
3. Facilities classified as Standard Industrial Classifications 10 through 14 (mineral industry) including active or inactive mining operations (except for areas of coal mining operations no longer meeting the definition of a reclamation area under 40 CFR 434.11(l) because the performance bond issued to the facility by the appropriate SMCRA authority has been released, or except for areas of noncoal mining operations that have been released from applicable State or Federal reclamation requirements after December 12, 1990) and oil and gas exploration, production, processing or treatment operations or transmission facilities that discharge stormwater contaminated by contact with or that has come into contact with, any overburden, raw material, intermediate products, finished products, byproducts or waste products located on the site of such operation; inactive mining operations are mining sites that are not being actively mined, but that have an identifiable owner/operator;
4. Hazardous waste treatment, storage, or disposal facilities, including those that are operating under interim status or a permit under Subtitle C of RCRA;
5. Landfills, land application sites, and open dumps that have received any industrial wastes (waste that is received from any of the facilities described under this subsection) including those that are subject to regulation under Subtitle D of RCRA;
6. Facilities involved in the recycling of materials, including metal scrap yards, battery reclaimers, salvage yards, and automobile junkyards, including but limited to those classified as Standard Industrial Classification 5015 and 5093;
7. Steam electric power generating facilities, including coal handling sites;
8. Transportation facilities classified as Standard Industrial Classifications 40, 41, 42 (except 4221-25), 43, 44, 45 and 5171 that have vehicle maintenance shops, equipment cleaning operations, or airport deicing operations. Only those portions of the facility that are either involved in vehicle maintenance (including vehicle rehabilitation, mechanical repairs, painting, fueling, and lubrication), equipment cleaning operations, airport deicing operations, or that are otherwise identified

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

under paragraphs (i) to (vii) or (ix) to (xi) of this subsection are associated with industrial activity;

9. Treatment works treating domestic sewage or any other sewage sludge or wastewater treatment device or system, used in the storage treatment, recycling, and reclamation of municipal or domestic sewage, including land dedicated to the disposal of sewage sludge that are located within the confines of the facility, with a design flow of 1.0 MGD or more, or required to have an approved pretreatment program under 40 CFR Part 403. Not included are farm lands, domestic gardens or lands used for sludge management where sludge is beneficially reused and that are not physically located in the confines of the facility, or areas that are in compliance with 40 CFR Part 503;
10. Construction activity including clearing, grading and excavation activities except: operations that result in the disturbance of less than 5 acres of total land area that are not part of a larger common plan of development or sale;
11. Facilities under Standard Industrial Classifications 20, 21, 22, 23, 2434, 25, 265, 267, 27, 283, 285, 30, 31 (except 311), 323, 34 (except 3441), 35, 36, 37 (except 373), 38, 39, 4221-25, (and that are not otherwise included within categories (i) to (x)).

TMDL (Total Maximum Daily Load) The sum of the individual wasteload allocations for point sources and load allocations for nonpoint sources and natural background (40 CFR 130.2(I)). TMDL is a study that: 1.quantifies the amount of a pollutant in a stream, 2.identifies the sources of the pollutant, 3.and recommends regulatory or other actions that may need to be taken in order for the stream to no longer be polluted. Following are actions that might be recommended: Re-allocate limits on the sources of pollutants documented as impacting streams. It might be necessary to lower the amount of pollutants being discharged under NPDES permits or to require the installation of other control measures, if necessary, to insure that standards will be met. For sources the division does not have regulatory authority over, such as ordinary non-point source agricultural and forestry activities, provide information and technical assistance to other state and federal agencies that work directly with these groups to install appropriate Best Management Practices. Even for the impacted streams, TMDL development is not considered appropriate for all bodies of water: if enforcement has already been taken and a compliance schedule has been developed; or if best management practices have already been installed for non-regulated activities, the TMDL is considered not applicable. In cases involving pollution sources in other states, the recommendation may be that another state or EPA perform the TMDL. TMDL's can also be described by the following equation:

TMDL = sum of non-point sources (LA)+ sum of point sources (WLA)+ margin of safety

Uncontrolled sanitary landfill means a landfill or open dump, whether in operation or closed, that does not meet the requirements for run-on or runoff controls established pursuant to subtitle D of the Solid Waste Disposal Act.

Upset means an exceptional incident in which there is unintentional and temporary noncompliance with the numeric effluent limitations of parts 5 and 11 of this permit because of factors beyond the reasonable control of the permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities (TMSP)

Wasteload allocation (WLA): The portion of a receiving water's loading capacity that is allocated to one of its existing or future point sources of pollution. WLAs constitute the type of water quality-based effluent limitation. (40 CFR 130.2(h)).

Waste pile means any noncontainerized accumulation of solid, nonflowing waste that is used for treatment or storage.

Water quality-limited segments: Those water segments that do not or are not expected to meet applicable water quality standards even after the application of technology.

Waters of the State or simply **Waters** is defined in the Tennessee Water Quality Control Act and means any and all water, public or private, on or beneath the surface of the ground, which are contained within, flow through or border upon Tennessee or any portion thereof except those bodies of water confined to and retained within the limits of private property in single ownership which do not combine to effect a junction with natural surface or underground waters.

Wet weather conveyance is defined in the Tennessee Water Quality Control Act and means, notwithstanding any other law or rule to the contrary, man-made or natural watercourses, including natural watercourses that have been modified by channelization:

(A) That flow only in direct response to precipitation runoff in their immediate locality;

(B) Whose channels are at all times above the groundwater table;

(C) That are not suitable for drinking water supplies; and

(D) In which hydrological and biological analyses indicate that, under normal weather conditions, due to naturally occurring ephemeral or low flow there is not sufficient water to support fish, or multiple populations of obligate lotic aquatic organisms whose life cycle includes an aquatic phase of at least two (2) months.

10.2. List of Acronyms

ARAP	Aquatic Resource Alteration Permit
BMP	Best Management Practice
CERCLA	Comprehensive Environmental Response, Compensation and Liability Act
CGP	Construction General Permit
CWA	Clean Water Act
EFO	Environmental Field Office
EPA	(U.S.) Environmental Protection Agency
EPSC	Erosion Prevention and Sediment Control
MS4	Municipal Separate Storm Sewer System
NOC	Notice of Coverage
NOI	Notice of Intent
NOT	Notice of Termination
NPDES	National Pollutant Discharge Elimination System
ONRW	Outstanding National Resource Waters
POTW	Publicly Owned Treatment Works
SIC	Standard Industrial Classification
SWPPP	Stormwater Pollution Prevention Plan

Tennessee Storm Water Multi-Sector General Permit for Industrial Activities
(TMSP)

TDEC	Tennessee Department of Environment and Conservation
TDOT	Tennessee Department of Transportation
TMDL	Total Maximum Daily Load
TMSP	Tennessee Multi-Sector General Permit for the Discharge of Stormwater from an Industrial Activity
TVA	Tennessee Valley Authority
TWQCA	Tennessee Water Quality Control Act
UIC	Underground Injection Control
USGS	United States Geological Survey
WLA	Waste Load Allocation

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

11. SPECIFIC REQUIREMENTS FOR INDUSTRIAL ACTIVITIES

Sector A - Stormwater Discharges Associated With Industrial Activity From Timber Products Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector A: Timber Products Facilities	Sampling Required?	Table Number
2411	Logging (Wet deck storage areas only authorized if no chemical additives are used in the spray water or applied to the logs)	Yes	A-1 A-4
2421	Sawmills and Planing Mills, General	Yes	A-2
2426	Hardwood Dimension and Flooring Mills	Yes	A-5
2429	Special Product Sawmills, NEC	Yes	A-5
2431	Millwork	Yes	A-5
2435	Hardwood Veneer and Plywood	Yes	A-5
2436	Softwood Veneer and Plywood	Yes	A-5
2439	Structural Wood Members, NEC	Yes	A-5
2441	Nailed and Lock Corner Wood Boxes and Shook	Yes	A-5
2448	Wood Pallets and Skids	Yes	A-5
2449	Wood Containers, NEC	Yes	A-5
2451	Mobile Homes	Yes	A-5
2452	Prefabricated Wood Buildings and Components	Yes	A-5
2491	Wood Preserving	Yes	A-3
2493	Reconstituted Wood Products	Yes	A-5
2499	Wood Products, NEC	Yes	A-5

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges

Discharges of boiler blowdown and water treatment wastewaters, noncontact and contact cooling waters, wash down waters from treatment equipment, and stormwater that has come in contact with areas where spraying of chemical formulations designed to provide surface protection has occurred, to waters of the state, or through municipal separate storm sewer

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

systems are not authorized by this permit. The operators of such discharges must obtain coverage under a separate NPDES discharge permit.

In addition to the discharges described in section 3.1.2, the following non-stormwater discharges may be authorized by this permit provided the non-stormwater component of the discharge is in compliance with paragraph 11.3.2.3. (Measures and Controls) discharges from the spray down of lumber and wood product storage yards where no chemical additives are used in the spray down waters and no chemicals are applied to the wood during storage.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for SWPPP preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The SWPPP shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each SWPPP shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The SWPPP shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each SWPPP shall provide a description of potential sources that may reasonably be expected to add significant amounts of pollutants to stormwater discharges or that may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each SWPPP shall identify all activities and significant materials that may potentially be significant pollutant sources. Each SWPPP shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under 11.A.3.2.3 (spills and leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas and storage areas including areas where raw materials, finished products and drums are stored. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants that are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified

- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
 - 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas that may contribute pollutants to stormwater discharges in a clean, orderly manner. Particular attention should be paid to areas where raw materials are stockpiled, material handling areas, storage areas, liquid storage tanks, material handling areas, and loading/unloading areas. The areas surrounding storm drain inlets and outfall points should also be free of material that could discharge off-site and contribute to pollutants in stormwater.
 - 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.

3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills that can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

3.2.3.4 Inspections - In addition to or as part of the comprehensive site evaluation required under 11.A.3.2.4 of this sector, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. Material storage and handling areas, liquid storage tanks, hoppers or silos, vehicle and equipment maintenance, cleaning, and fueling areas, material handling vehicles, equipment and processing areas shall be inspected at least once per month as part of the maintenance program. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify periodic dates for such training.

3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

3.2.3.7 Non-stormwater Discharges

3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall,

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

manhole, or other point of access to the ultimate conduit that receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph 11.A.3.2.3.7.3 “Failure to Certify” (below).

- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division’s local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state that are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas that, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those that control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 11.A.3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetated swales, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), infiltration devices, and detention/retention basins or other equivalent measures.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Evaluations shall be conducted at least once at portable plant locations that are not in operation for a complete year. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity including; material storage and handling areas, liquid storage tanks, hoppers or silos, vehicle and

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

equipment maintenance, cleaning, and fueling areas, material handling vehicles, equipment and processing areas, and areas where aggregate is stockpiled outdoors shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, (e.g., oil/water separators, detention ponds, sedimentation basins or equivalent measures) sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as dust collection equipment and spill response equipment, shall be made.

- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.A.3.2.2 of this section (description of potential pollutant sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.A.3.2.3. of this section (measures and controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case later than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with paragraph 11.A.3.2.3.2 (above) of the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under paragraph 11.A.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

In addition to the numeric effluent limitations described in subpart 5.2 (Coal Pile Runoff) of the TMSP, the following effluent limitations shall be met by existing and new stormwater discharges from Wet Decking Discharges at Log Storage and Handling Areas (authorized only if no chemical additives are used in the spray water or applied to the logs).

The concentration of pollutants in stormwater discharges shall not exceed the effluent limitations in Table A-1.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

Table A-1. Numeric Effluent Limitations for Wet Decking Discharges at Log Storage and Handling Areas (SIC 2411)

(Wet deck storage areas only authorized if no chemical additives are used in the spray water or applied to the logs)

Effluent Characteristics	Effluent Limitations (mg/L) ¹ (Maximum for any 1 day)
Debris (woody material such as bark, twigs, branches, heartwood, or sapwood).	No Discharge of debris that will not pass through a 2.54 cm (1") diameter round opening.
pH	Within the range of 6.0 to 9.0

1.) Monitor once per year for each monitoring year.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Numeric Effluent Limitations as described in part 4 of this sector (above) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in part 1 of this industrial sector (Discharges Covered Under This Section). In addition to the parameters listed in Tables A-1, A-2, A-3, A-4 and A-5, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table A-2. Benchmark for General Sawmills and Planning Mills Facilities

Pollutants of Concern	Benchmark [mg/L]
Chemical Oxygen Demand	120
Total Suspended Solids	150
Total Recoverable Zinc	0.395

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

Table A-3. Benchmark for Wood Preserving Facilities

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Arsenic	0.15
Total Recoverable Copper	0.018

Table A-4. Benchmark for Log Processing, Storage and Handling

Pollutants of Concern	Benchmark [mg/L]
Total Suspended Solids	150

Table A-5. Monitoring Requirements for Hardwood Dimension and Flooring Mills; Special Products Sawmills, not elsewhere classified; Millwork, Veneer, Plywood and Structural Wood; Wood Containers; Wood Buildings and Mobile Homes; Reconstituted Wood Products; and Wood Products Facilities not elsewhere classified

Pollutants of Concern	Benchmark [mg/L]
Chemical Oxygen Demand	120
Total Suspended Solids	150

- 5.1.1 Monitoring Periods. Facilities required to perform monitoring shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.
- 5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time SW monitoring results were received, describing the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next monitoring period and submit the data along with the data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous or inaccessible conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility that drains to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

- 5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall, or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph 5.2 below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under subpart 5.2 of this sector (below). If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

5.3 Quarterly Visual Examination of Stormwater Quality.

All timber products facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination(s) must be made at least once in each of the following three-month periods: January through March, April through June, July through September, and October through December. The examination shall be made during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.3.1 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examination shall document observations of color, odor, clarity, floating

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector A

solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.

- 5.3.2 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.3 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.4 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.5 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector B

Sector B - Stormwater Discharges Associated With Industrial Activity From Paper And Allied Products Manufacturing Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector B: Paper and Allied Products Manufacturing Facilities	Sampling Required?	Table Number
2611	Pulp Mills	No	--
2621	Paper Mills	No	--
2631	Paperboard Mills	Yes	B-1
2652	Setup Paperboard Boxes	No	--
2653	Corrugated and Solid Fiber Boxes	No	--
2655	Fiber Cans, Tubes, Drums, and Similar Products	No	--
2656	Sanitary Food Containers, Except Folding	No	--
2657	Folding Paperboard Boxes, Including Sanitary	No	--
2671	Packaging Paper and Plastics Film, Coated and Laminated	No	--
2672	Coated and Laminated Paper, NEC	No	--
2673	Plastics, Foil, and Coated Paper Bags	No	--
2674	Uncoated Paper and Multiwall Bags	No	--
2675	Die-Cut Paper and Paperboard and Cardboard	No	--
2676	Sanitary Paper Products	No	--
2677	Envelopes	No	--
2678	Stationery, Tablets, and Related Products	No	--
2679	Converted Paper and Paperboard Products, NEC	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in section 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

- 3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector B

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources that may reasonably be expected to add significant amounts of pollutants to stormwater discharges or that may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials that may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under 11.B.3.2.2.3 (spills and leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas and storage areas including areas where raw materials, finished products and drums are stored. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants that are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector B

- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas that may contribute pollutants to stormwater discharges in a clean, orderly manner. Particular attention should be paid to areas where raw materials are stockpiled, material handling areas, storage areas, liquid storage tanks, material handling areas, and loading/unloading areas. The areas surrounding storm drain inlets and outfall points should also be free of material that could discharge off-site and contribute to pollutants in stormwater.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills that can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - In addition to or as part of the comprehensive site evaluation required under this section, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. Material storage and

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector B

handling areas, liquid storage tanks, hoppers or silos, vehicle and equipment maintenance, cleaning, and fueling areas, material handling vehicles, equipment and processing areas shall be inspected at least once per month as part of the maintenance program. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify periodic dates for such training.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
 - 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit that receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph 3.2.3.7.3 "Failure to Certify" (below).
 - 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector B

- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state that are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.8 Sediment and Erosion Control - The plan shall identify areas that, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.9 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those that control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 11.B.3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetated swales, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), infiltration devices, and detention/retention basins or other equivalent measures.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Evaluations shall be conducted at least once at portable plant locations that are not in operation for a complete year. Such evaluations shall provide:
- 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity including; material storage and handling areas, liquid storage tanks, hoppers or silos, vehicle and equipment maintenance, cleaning, and fueling areas, material handling vehicles, equipment and processing areas, and areas where aggregate is stockpiled outdoors shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, (e.g., oil/water separators, detention ponds, sedimentation basins or equivalent measures) sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as dust collection equipment and spill response equipment, shall be made.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector B

- 3.2.4.2.1 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with 11.B.3.2.2 of this section (description of potential pollutant sources) and pollution prevention measures and controls identified in the plan in accordance with B.3.2.3 of this section (measures and controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case later than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with paragraph B.3.2.3.2 (above) of the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under B.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations of this permit described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2. (Reporting). In addition to the parameters listed in Table B-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector B

measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table B-1. Benchmark for Paper and Allied Products Mfg. Facilities

Pollutants of Concern	Benchmark [mg/L]
Chemical Oxygen Demand	120

- 5.1.1 Monitoring Periods. Paperboard mills shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.
- 5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector B

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility that drains to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph (b) below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector B

presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in (1), below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

5.3.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snow melt: January through March; April through June; July through September; and October through December.

5.3.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed one hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual will carry out the collection and examination of discharges for the life of the permit.

5.3.3 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examination. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector B

flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

- 5.3.4 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.
- 5.3.5 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.6 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfalls provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explaining in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector C

Sector C - Stormwater Discharges Associated With Industrial Activity From Chemical and Allied Products Manufacturing Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector C: Chemical and Allied Products Manufacturing Facilities	Sampling Required?	Table Number
2812	Alkalies and Chlorine	Yes	C-3
2813	Industrial Gases	Yes	C-3
2816	Inorganic Pigments	Yes	C-3
2819	Industrial Inorganic Chemicals, NEC	Yes	C-3
2821	Plastics Material Synthetic Resins, and Nonvulcanizable Elastomers	Yes	C-5
2822	Synthetic Rubber	Yes	C-5
2823	Cellulosic Manmade Fibers	Yes	C-5
2824	Manmade Organic Fibers, Except Cellulosic	Yes	C-5
2841	Soaps and Other Detergents, Except Specialty Cleaners	Yes	C-4
2833	Medicinal Chemicals and Botanical Products	No	--
2834	Pharmaceutical Preparation	No	--
2835	<i>In Vitro</i> and <i>in Vitro</i> Diagnostic Substances	No	--
2836	Biological Products, except Diagnostic Substances	No	--
2842	Specialty Cleaning, Polishing, and Sanitary Preparations	Yes	C-4
2843	Surface Active Agents, Finishing Agents, Sulfonated Oils, and Assistants	Yes	C-4
2844	Perfumes, Cosmetics, and Other Toilet Preparations	Yes	C-4
2851	Paints, Varnishes, Lacquers, Enamels, and Allied Products	No	--
2861	Gum and Wood Chemicals	No	--
2865	Cyclic Organic Crudes and Intermediates, and Organic Dyes and Pigments	No	--
2869	Industrial Organic Chemicals, NEC	No	--
2873	Nitrogenous Fertilizers	Yes	C-2
2874	Phosphatic Fertilizers	Yes	C-1
2875	Fertilizers, Mixing Only	Yes	C-2
2879	Pesticides and Agricultural Chemicals, NEC	Yes	C-2
2891	Adhesives and Sealants	No	--
2892	Explosives	No	--
2893	Printing Ink	No	--
2895	Carbon Black	No	--
2899	Chemicals and Chemical Preparations, NEC	No	--

Co-located Industrial Activities. When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector C

Limitations on Coverage. The following stormwater discharges associated with industrial activity are not authorized by this section of the permit:

- Storm water discharges from drug manufacturing facilities and other establishments classified as SIC Code 283X.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in section 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources that may reasonably be expected to add significant amounts of pollutants to stormwater discharges or that may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials that may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under 3.2.2.3 (spills and leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas and storage areas including areas where raw materials, finished products and drums are stored. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants that are likely to be present in stormwater discharges associated with industrial

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector C

activity. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

- 3.2.2.2 **Inventory of Exposed Materials** - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 **Spills and Leaks** - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 **Sampling Data** - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 **Risk Identification and Summary of Potential Pollutant Sources** - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 **Measures and Controls.** Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
 - 3.2.3.1 **Good Housekeeping** - Good housekeeping requires the maintenance of areas that may contribute pollutants to stormwater discharges in a clean, orderly manner. Particular attention should be paid to areas where raw materials are stockpiled, material handling areas, storage areas, liquid storage tanks, material handling areas, and loading/unloading areas. The areas surrounding storm drain inlets and outfall points should also be free of material that could discharge off-site and contribute to pollutants in stormwater.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector C

- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills that can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - In addition to or as part of the comprehensive site evaluation required under this section, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. Material storage and handling areas, liquid storage tanks, hoppers or silos, vehicle and equipment maintenance, cleaning, and fueling areas, material handling vehicles, equipment and processing areas shall be inspected at least once per month as part of the maintenance program. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.
- Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.
- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify periodic dates for such training.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector C

that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit that receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph 3.2.3.7.3 “Failure to Certify” (below).

- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division’s local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state that are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.8 Sediment and Erosion Control - The plan shall identify areas that, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.9 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those that control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetated swales, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), infiltration devices, and detention/retention basins or other equivalent measures.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Evaluations shall be conducted at least once at portable plant locations that are not in operation for a complete year. Such evaluations shall provide:

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector C

- 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity including; material storage and handling areas, liquid storage tanks, hoppers or silos, vehicle and equipment maintenance, cleaning, and fueling areas, material handling vehicles, equipment and processing areas, and areas where aggregate is stockpiled outdoors shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, (e.g., oil/water separators, detention ponds, sedimentation basins or equivalent measures) sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as dust collection equipment and spill response equipment, shall be made.
- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with 3.2.2 of this section (description of potential pollutant sources) and pollution prevention measures and controls identified in the plan in accordance with section 3.2.3 of this sector (measures and controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case later than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with paragraph (4)(b) (above) of the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

In addition to the numeric effluent limitations described in subpart 5.2 (Coal Pile Runoff) of the TMSP, the following effluent limitations shall be met by existing and new discharges with:

Phosphate Fertilizer Manufacturing Runoff. The provisions of this paragraph are applicable to stormwater discharges from the Phosphate Subcategory of the Fertilizer Manufacturing Point Source Category (40 CFR 418.10). The term contaminated stormwater runoff shall mean precipitation runoff, that during manufacturing or processing, comes into contact with any raw materials, intermediate product, finished product, by-products or waste product (40 CFR 418.11(c)). The monitoring requirements for other parameters in stormwater discharges are in Table C-1.

Table C-1. Numeric Effluent Limits for Phosphate Subcategory of the Fertilizer Mfg. Point Source Category

Pollutants of Concern	Daily Maximum [mg/L]
Total Phosphorus (as P)	105
Fluoride	75

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Numeric Effluent Limitations as described in part 4 of this sector (above) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 6.b. (Reporting). In addition to the parameters listed in Tables C-2, C-3, C-4, and C-5 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table C-2. Benchmarks for Agricultural Chemicals Monitoring Requirements

Pollutants of Concern	Benchmark [mg/L]
Nitrate plus Nitrite Nitrogen	0.68
Total Recoverable Lead	0.156
Total Recoverable Iron	5
Total Recoverable Zinc	0.395
Phosphorus	2.0

Table C-3. Benchmarks for Industrial Inorganic Chemicals Monitoring Requirements

Pollutants of Concern	Benchmark [mg/L]
Ammonia	4
Total Recoverable Aluminum	0.75
Total Recoverable Copper	0.018
Total Recoverable Magnesium	0.064
Total Recoverable Iron	5.
Nitrate plus Nitrite Nitrogen	0.68

Table C-4. Benchmarks for Soaps, Detergents, Cosmetics, and Perfumes Monitoring Requirements

Pollutants of Concern	Benchmark [mg/L]
Nitrate plus Nitrite Nitrogen	0.68
Total Recoverable Zinc	0.395

Table C-5. Benchmark for Plastics, Synthetics, and Resins Monitoring Requirements

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Zinc	0.395

- 5.1.1 Monitoring Periods. Agricultural chemical manufacturing facilities; industrial inorganic chemical facilities; soaps, detergents, cosmetics, and perfume manufacturing facilities; and plastics, synthetics, and resin manufacturing facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.
- 5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector C

preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector C

there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility that drains to the outfall for which sampling was waived.

- 5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.
- 5.1.3.4 **Representative Discharge.** When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.
- 5.1.3.5 **Alternative Certification.** A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph (b) below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph b. below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 **Reporting**

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever**

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector C

comes first. For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above:

- 5.3 Compliance Monitoring Requirements. In addition to the monitoring required in paragraph 6a (above), permittees with contaminated stormwater runoff from phosphate fertilizer manufacturing facilities must monitor their contaminated stormwater discharges for the presence of phosphorus and fluoride at least annually (one time per year). Facilities must report in accordance with Reporting. In addition to the parameters listed above, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled;
- 5.3.1 Sample Type A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable.
- 5.3.2 Reporting. Permittees with phosphate fertilizer manufacturing facilities shall submit monitoring results obtained during the reporting period beginning the effective date of this permit on TMSP Stormwater Monitoring Report Form(s) postmarked no later than the last day of the month following the effective date. For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.
- 5.3.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each of the following periods: January through March; April through June; July through September; and October through December during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.
- 5.3.3.1 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector C

discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for entire permit term.

- 5.3.3.2 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.3.3 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.3.4 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examination. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector D

Sector D - Stormwater Discharges Associated With Industrial Activity From Asphalt Paving and Roofing Materials and Lubricant Manufacturers

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector D: Asphalt Paving, Roofing Materials, and Lubricant Manufacturing Facilities	Sampling Required?	Table Number
2951	Asphalt Paving Mixtures and Blocks	Yes	D-1 & 2
2952	Asphalt Felts and Coatings	Yes	D- 2
2992	Lubricating Oils and Greases	No	

Co-located Industrial Activities. When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

Limitations on Coverage. The following stormwater discharges associated with industrial activity are not authorized by this section of the permit:

- Storm water discharges from petroleum refining facilities, including those that manufacture asphalt or asphalt products and that are classified as SIC code 2911,
- Storm water discharges from oil recycling facilities, and
- Storm water discharges associated with fats and oils rendering.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in section 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

- 3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.
- 3.2 Contents of Plan. The plan shall include, at a minimum, the following items:
- 3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector D

or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources that may reasonably be expected to add significant amounts of pollutants to stormwater discharges or that may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials that may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under 11.D.3.2.2.3 (spills and leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas and storage areas including areas where raw materials, finished products and drums are stored. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, a prediction of the direction of flow, and an identification of the types of pollutants that are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector D

- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas that may contribute pollutants to stormwater discharges in a clean, orderly manner. Particular attention should be paid to areas where raw materials are stockpiled, material handling areas, storage areas, liquid storage tanks, material handling areas, and loading/unloading areas. The areas surrounding storm drain inlets and outfall points should also be free of material that could discharge off-site and contribute to pollutants in stormwater.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills that can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - In addition to or as part of the comprehensive site evaluation required under this section, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. Material storage and handling areas, liquid storage tanks, hoppers or silos, vehicle and equipment maintenance, cleaning, and fueling areas, material handling vehicles, equipment and processing areas shall be inspected at least once per month as part of the maintenance program. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector D

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify periodic dates for such training.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
 - 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit that receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).
 - 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
 - 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector D

storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state that are not authorized by an NPDES permit are unlawful, and must be terminated.

- 3.2.3.8 Sediment and Erosion Control - The plan shall identify areas that, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.9 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those that control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph D.3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetated swales, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), infiltration devices, and detention/retention basins or other equivalent measures.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Evaluations shall be conducted at least once at portable plant locations that are not in operation for a complete year. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity including; material storage and handling areas, liquid storage tanks, hoppers or silos, vehicle and equipment maintenance, cleaning, and fueling areas, material handling vehicles, equipment and processing areas, and areas where aggregate is stockpiled outdoors shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, (e.g., oil/water separators, detention ponds, sedimentation basins or equivalent measures) sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as dust collection equipment and spill response equipment, shall be made.
 - 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with D.3.2.2 of this section (description of potential pollutant sources) and pollution prevention measures and controls identified in the plan in accordance with 11.D.3.2.3 of this section (measures and controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case later than 12 weeks after the evaluation.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector D

- 3.2.4.3. A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with paragraph D.3.2.3.2 (above) of the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under D.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations.

In addition to the numeric effluent limitations described in subpart 5.2 (Coal Pile Runoff) of the TMSP, discharges from areas where production of asphalt paving and roofing emulsions occurs may not exceed the following numeric limits.

Table D-1. Numeric Effluent Limits for Asphalt Paving and Roofing Materials Mfg. And Emulsion Plants Facilities

Pollutants of Concern	Daily Maximum	30-day Average
Total Suspended Solids (TSS)	23 mg/L	15 mg/L
Oil and Grease	15 mg/L	10 mg/L
pH	6.0-9.0 standard units	

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Numeric Effluent Limitations as described in part 4 of this sector (above) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector D

Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table D-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table D-2. Benchmark for Asphalt Paving and Roofing Materials Mfg. Facilities

Pollutants of Concern	Benchmark [mg/L]
Total Suspended Solids	150

5.1.1 Monitoring Periods. Asphalt paving and roofing materials manufacturing facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector D

modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility that drains to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.3.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector D

discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

- 5.1.3.5 **Alternative Certification.** A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph (b) below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements in part of this permit associated with effluent limitations.

5.2 **Reporting**

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

- 5.3 **Quarterly Visual Examination of Stormwater Quality.** Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in (5.3.1), below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.3.1 Examinations shall be conducted in each of the following periods for the purposes of evaluating stormwater quality associated with stormwater runoff or snow melt: January through March; April through June; July through September; and October through December.

- 5.3.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector D

discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the life of the permit.

- 5.3.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfalls provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explaining in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation on site with the results of the visual examination. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.
- 5.4 Compliance Monitoring Requirements. Permittees with facilities that produce asphalt paving or roofing emulsions must monitor their stormwater discharges associated with these activities for the presence of TSS, oil and grease, and for pH at least annually (one time per year) according to 5.12. Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed above, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

Sector E - Stormwater Discharges Associated With Industrial Activity From Glass, Clay, Cement, Concrete, and Gypsum Product Manufacturing Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector E: Glass, Clay, Cement, Concrete, and Gypsum Product Manufacturing Facilities	Sampling Required?	Table Number
3211	Flat Glass	Yes	E-4
3221	Glass Containers	Yes	E-4
3229	Pressed and Blown Glass and Glassware, NEC	Yes	E-4
3231	Glass Products, Made of Purchased Glass	Yes	E-4
3241	Cement, Hydraulic	Yes	E-4
3251	Brick and Structural Clay Tile	Yes	E-2
3253	Ceramic Wall and Floor Tile	Yes	E-2
3255	Clay Refractories	Yes	E-2
3259	Structural Clay Products, NEC	Yes	E-2
3261	Vitreous China Plumbing Fixtures and China and Earthenware Fittings and Bathroom Accessories	Yes	E-2
3262	Vitreous China Table and Kitchen Articles	Yes	E-2
3263	Fine Earthenware (Whiteware) Table and Kitchen Articles	Yes	E-2
3264	Porcelain Electrical Supplies	Yes	E-2
3269	Pottery Products, NEC	Yes	E-2
3271	Concrete Block and Brick	Yes	E-3
3272	Concrete Products, Except Block and Brick	Yes	E-3
3273	Ready-Mixed Concrete	Yes	E-1 & 3
3274	Lime	Yes	E-3
3275	Gypsum Products	Yes	E-3
3281	Cut Stone and Stone Products	Yes	E-4
3295	Minerals and Earths, Ground or Otherwise Treated	Yes	E-4
3296	Mineral Wool	Yes	E-4
3297	Nonclay Refractories	Yes	E-4
3299	Nonmetallic Mineral Products, NEC	Yes	E-4

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in section 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in part 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources that may reasonably be expected to add significant amounts of pollutants to stormwater discharges or that may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials that may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under section E.3.2.3 of this sector (Spills and Leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas and storage areas. Facilities shall also identify, on the site map, the location of any: bag house or other dust control device; recycle/sedimentation pond, clarifier or other device used for the treatment of process wastewater and the areas that drain to the treatment device. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants that are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter [e.g., Total Suspended Solids (TSS), etc.] of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
 - 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas that may contribute pollutants to stormwater discharges in a clean, orderly manner.

Facilities shall prevent or minimize the discharge of spilled cement, aggregate (including sand or gravel), kiln dust, fly ash, settled dust other significant materials in stormwater from paved portions of the site that are exposed to stormwater. Measures used to minimize the presence of these materials may include regular sweeping, or other equivalent measures. The plan shall indicate the frequency of sweeping or other measures. The frequency shall be determined based upon consideration of the amount of industrial activity occurring in the area and frequency of precipitation, but shall not be less than once per week when cement, aggregate, kiln dust or fly ash are being handled or otherwise processed in the area.

Facilities shall prevent the exposure of fine granular solids such as cement, fly ash, and kiln dust to stormwater. Where practicable, these materials shall be stored in enclosed silos, hoppers or buildings, in covered areas, or under covering.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve routine inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills that can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility specified in the plan. The inspection frequency shall be specified in the plan based upon a consideration of the level of industrial activity at the facility, but shall be a minimum of once per month while the facility is in operation. The inspection shall take place while the facility is in operation and shall at a minimum include all of the following areas that are exposed to stormwater at the site: material handling areas, above ground storage tanks, hoppers or silos, dust collection/containment systems, truck wash down and equipment cleaning areas. Tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.
- Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.
- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping, truck wash out procedures, equipment wash down procedures and material management practices. The pollution prevention plan shall identify periodic dates for such training.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit that receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).

Facilities engaged in production of concrete block, brick or other products shall include in the certification a description of measures that insure that process waste water that results from washing of trucks, mixers, transport buckets, forms or other equipment are discharged in accordance with NPDES requirements or are recycled. Facilities with wash water recycle ponds shall include an estimate of the amount of rainfall (in inches) required to cause the recycle pond to overflow in a 24-hour period.

Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

- 3.2.3.7.2 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state that are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.8 Sediment and Erosion Control - The plan shall identify areas that, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.9 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those that control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph XI.E.3.a.(2) of this section (Description of Potential Pollutant Sources)] shall be

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices or other equivalent measures.

3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but, in no case less than once a year. Such evaluations shall provide:

3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity including but not limited to: material handling areas, above ground storage tanks, hoppers or silos, dust collection/containment systems, truck wash down and equipment cleaning areas shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures such as recycle ponds, identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.

3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph E.3.2.2.5 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph E.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.

3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with paragraph E.3.2.3.2 (above) of the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

3.2.4.4 Where compliance evaluation schedules overlap with inspections required under this permit the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

In addition to the numeric effluent limitations described in subpart 5.2 (Coal Pile Runoff) of the TMSP, the following limitations shall be met by existing and new dischargers.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

Cement Manufacturing Facility, Material Storage Runoff. Any discharge composed of runoff that derives from the storage of materials including raw materials, intermediate products, finished products, and waste materials that are used in or derived from the manufacture of cement shall not exceed the maximum concentration listed below. Runoff from the storage piles shall not be diluted with other stormwater runoff or flows to meet this limitation. Any untreated overflow from facilities designed, constructed and operated to treat the volume of material storage pile runoff that is associated with a 10-year, 24-hour rainfall event shall not be subject to the TSS or pH limitations. Dischargers subject to these numeric effluent limitations must be in compliance with these limits upon commencement of coverage and for the entire term of this permit.

Table E-1. Numeric Effluent Limits for Cement Manufacturing (SIC 3273)

Pollutants of Concern	Daily Maximum
Total Suspended Solids (TSS)	50 mg/L
pH	6.0-9.0 standard units

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Numeric Effluent Limitations as described in part 4 of this sector (above) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Tables E-1, E-2 and E-3 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

Table E-2. Benchmark for Clay Product Manufacturers (SIC 3251-3259, 3261-3269)

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Aluminum	0.75
Total Suspended Solids (TSS)	150

Table E-3. Benchmarks for Concrete and Gypsum Product Manufacturers (SIC 3271-3275)

Pollutants of Concern	Benchmark [mg/L]
Total Suspended Solids (TSS)	150
Total Recoverable Iron	5

Table E-4. Benchmarks for Concrete and Gypsum Product Manufacturers (SIC 3211, 3221, 3229, 3231, 3241, 3281, 3291-3299)

Pollutants of Concern	Benchmark [mg/L]
Total Suspended Solids (TSS)	150

- 5.1.1 Monitoring Periods. Facilities subject to analytical monitoring requirements described in part 11.5.5.a, shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.
- 5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour waived when the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or non-process water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark), a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility that drains to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.3.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

- 5.1.3.5 **Alternative Certification.** A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall, on pollutant by pollutant basis in lieu of monitoring reports required by paragraph (b) below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations. The Division of Water Resources does not expect facilities to be able to exercise this certification for indicator parameters, such as TSS and BOD.

5.2 **Reporting**

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

- 5.3 **Quarterly Visual Examination of Stormwater Quality.** Glass, clay, cement, concrete, and gypsum manufacturing facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination(s) must be made at least once in each of the following three-month periods: January through March, April through June, July through September, and October through December. The examination shall be made during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.3.1 Examinations shall be made of grab samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for entire permit term.

- 5.3.2 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.3 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the evaluation data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.4 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.5 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.
- 5.4 Compliance Monitoring Requirements. Permittees with cement manufacturing facilities must monitor runoff from material storage for the presence of TSS and pH at least annually (one time per year). Facilities must report in accordance with 11.D.5.2 (reporting). In addition to the parameters listed above, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector E

of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

Sector F - Stormwater Discharges Associated With Industrial Activity From Primary Metals Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector F: Primary Metals Facilities	Sampling Required?	Table Number
3312	Steel Works, Blast Furnaces (Including Coke Ovens), and Rolling Mills	Yes	F-1
3313	Electrometallurgical Products, Except Steel	Yes	F-1
3315	Steel Wiredrawing and Steel Nails and Spikes	Yes	F-1
3316	Cold-Rolled Steel Sheet, Strip, and Bars	Yes	F-1
3317	Steel Pipe and Tubes	Yes	F-1
3321	Gray and Ductile Iron Foundries	Yes	F-2
3322	Malleable Iron Foundries	Yes	F-2
3324	Steel Investment Foundries	Yes	F-2
3325	Steel Foundries, NEC	Yes	F-2
3331	Primary Smelting and Refining of Copper	No	--
3334	Primary Production of Aluminum	No	--
3339	Primary Smelting and Refining of Nonferrous Metals, Except Copper and Aluminum	No	--
3341	Secondary Smelting and Refining of Nonferrous Metals	No	--
3351	Rolling, Drawing, and Extruding of Copper	Yes	F-3
3353	Aluminum Sheet, Plate, and Foil	Yes	F-3
3354	Aluminum Extruded Products	Yes	F-3
3355	Aluminum Rolling and Drawing, NEC	Yes	F-3
3356	Rolling, Drawing, and Extruding of Nonferrous Metals, Except Copper and Aluminum	Yes	F-3
3357	Drawing and Insulating of Nonferrous Wire	Yes	F-3
3363	Aluminum Die-Castings	Yes	F-4
3364	Nonferrous Die-Castings, Except Aluminum	Yes	F-4
3365	Aluminum Foundries	Yes	F-4
3366	Copper Foundries	Yes	F-4
3369	Nonferrous Foundries, Except Aluminum and Copper	Yes	F-4
3398	Metal Heat Treating	No	--
3399	Primary Metal Products, NEC	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in section 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in part 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources that may reasonably be expected to add significant amounts of pollutants to stormwater discharges or that may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials that may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under subsection 11.F.3.2.2.2 of this sector (Spills and Leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes such as spent solvents or baths, sand, slag or dross, liquid storage tanks or drums, processing areas including pollution control equipment such as baghouses, and storage areas of raw materials such as coal, coke, scrap, sand, fluxes, refractories, or metal in any form. The map shall also indicate areas of the facility where accumulation of significant amounts of particulate matter from operations such as furnace or oven emissions or losses from coal/coke handling operations, etc., is likely, and could result in a discharge of pollutants to waters of the state. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants that are likely to be present in stormwater discharges associated with industrial

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

activity. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

- 3.2.2.2 **Inventory of Exposed Materials** - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives. This description should also include areas with the potential for deposition of particulate matter from process air emissions or losses during material handling activities. The description shall be updated whenever there is a significant change in the type or quantity of exposed materials, or material management practices that may affect the exposure of materials to stormwater.
- 3.2.2.3 **Spills and Leaks** - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 **Sampling Data** - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 **Risk Identification and Summary of Potential Pollutant Sources** - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes occurring indoors or out, with or without pollution control equipment in place to trap particulates; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., chemical oxygen demand, oil and grease, copper, lead, zinc, etc.) of concern, shall be identified.
- 3.2.3 **Measures and Controls.** Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 **Good Housekeeping** - Good housekeeping requires the maintenance of areas that may contribute pollutants to stormwater discharges in a clean, orderly manner. The pollution

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

prevention plan should consider implementation of the following measures, or equivalent measures, where applicable.

Establish a cleaning or maintenance program for all impervious areas of the facility where particulate matter, dust, or debris may accumulate, particularly areas of material loading/unloading, material storage and handling, and processing.

Pave areas of vehicle traffic or material storage where vegetative or other stabilization methods are not practical. Institute a sweeping program in these areas as well.

For unstabilized areas of the facility where sweeping is not practical, stormwater management devices such as sediment traps, vegetative buffer strips, filter fabric fence, sediment filtering boom, gravel outlet protection, or other equivalent measures, that effectively trap or remove sediment should be considered.

- 3.2.3.2 Source Controls - The permittee shall consider preventive measures to minimize the potential exposure of all significant materials (as described in paragraph 11.6.3.a. (3) of this section) to precipitation and stormwater runoff. The permittee should consider the implementation of the following measures, or equivalent measures, to reduce the exposure of all materials to stormwater:

Relocating all materials, including raw materials, intermediate products, material handling equipment, obsolete equipment, and wastes currently stored outside to inside locations.

Establishment of a schedule for removal of wastes and obsolete equipment to minimize the volume of these materials stored onsite that may be exposed to stormwater.

Initiate a program to substitute less hazardous materials, or materials less likely to contaminate stormwater, or substitution of recyclable materials for nonrecyclables wherever possible.

Constructing permanent or semipermanent covers or other similar forms of protection over stockpiled materials, material handling and processing equipment. Options include roofs, tarps, and covers. This may also include the use of containment bins or covered dumpsters for raw materials, waste materials and nonrecyclable waste materials.

Dikes, berms, curbs, trenches, or other equivalent measures to divert run-on from material storage, processing, or waste disposal areas.

- 3.2.3.3 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.

A schedule for inspection and maintenance of all particulate emissions control equipment should be established to ensure proper operation. Inspections should be conducted as described in Section 11.F.3.2.3.6 below. Detection of any leaks or defects that could lead to excessive emissions shall be repaired as soon as practicable. Where significant settling or deposition from

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

process emissions are observed during proper operation of existing equipment, the permittee shall consider ways to reduce these emissions including but not limited to: upgrading or replacing existing equipment; collecting runoff from areas of deposition for treatment or recycling; or changes in materials or processes to reduce the generation of particulate matter.

3.2.3.4 Structural Best Management Practices (BMPs) will be visually inspected for signs of washout, excessive sedimentation, deterioration, damage, or overflowing, and shall be repaired or maintained as soon as practicable.

3.2.3.5 Spill Prevention and Response Procedures - Areas where potential spills that can contribute pollutants to stormwater discharges may occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should be consider specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

3.2.3.6 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals, but no less frequently than once during each of the following periods: January through March; April through June; July through September; and October through December. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained. Inspections shall be conducted on a quarterly basis and address, at a minimum, the following areas where applicable:

Air pollution control equipment such as baghouses, electrostatic precipitators, scrubbers, and cyclones, should be inspected on a routine basis for any signs of disrepair such as leaks, corrosion, or improper operation that could limit their efficiency and lead to excessive emissions. The permittee should consider monitoring air flow at inlets and outlets, or equivalent measures, to check for leaks or blockage in ducts. Visual inspections shall be made for corrosion, leaks, or signs of particulate deposition or visible emissions that could indicate leaks.

All process or material handling equipment such as conveyors, cranes, and vehicles should be inspected for leaks, drips, etc. or for the potential loss of materials.

Material storage areas such as piles, bins or hoppers for storing coke, coal, scrap, or slag, as well as chemicals stored in tanks or drums, should be examined for signs of material losses due to wind or stormwater runoff.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

3.2.3.7 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

plan shall identify periodic dates for such training.

3.2.3.8 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

3.2.3.8 Non-stormwater Discharges

3.2.3.8.1 Certification. The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit that receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).

Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

3.2.3.8.2 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state that are not authorized by an NPDES permit are unlawful, and must be terminated.

3.2.3.9 Sediment and Erosion Control - The plan shall identify areas that, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion. The plan shall also contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those that control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity (see paragraph F.3.2.2.5 of this section (Description of Potential Pollutant Sources) shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices or other equivalent measures.

3.2.3.10 Management of Runoff - Facilities shall consider implementation of the following stormwater management practices or other equivalent measures to address pollutants of concern:

- Vegetative buffer strips, filter fabric fence, sediment filtering boom, or other equivalent measures, that effectively trap or remove sediment prior to discharge through an inlet or catch basin.
- Media filtration such as catch basin filters and sand filters.
- Oil/water separators or the equivalent.
- Structural BMPs such as settling basins, sediment traps, retention or detention ponds, recycling ponds or other equivalent measures.

3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP but in no case less than once a year. Such evaluations shall provide:

3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity such as material storage and handling, loading and unloading, process activities, and plant yards shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, other structural pollution prevention measures identified in the plan, as well as process related pollution control equipment shall be observed or tested to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.

3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph F.3.2.2.5 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph F.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.

3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with paragraph 3.2.3.7 (above) of the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Tables F-1 through F-5 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

Table F-1. Benchmark Monitoring Requirements for Steel Works, Blast Furnaces, and Rolling and Finishing Mills (SIC 331X)

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Aluminum	0.75
Total Recoverable Zinc	0.395
Total Suspended Solids	150

Table F-2. Benchmark Monitoring Requirements for Iron and Steel Foundries (SIC 332X)

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Aluminum	0.75
Total Suspended Solids	150
Total Recoverable Copper	0.018
Total Recoverable Iron	5
Total Recoverable Zinc	0.395
Chemical Oxygen Demand (COD)	120

Table F-3. Benchmark Monitoring Requirements for Rolling, Drawing, and Extruding of Non-Ferrous Metals (SIC 335X)

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Copper	0.018
Total Recoverable Zinc	0.395
Chemical Oxygen Demand (COD)	120

Table F-4. Benchmark Monitoring Requirements for Non-Ferrous Foundries (SIC 336)

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Copper	0.018
Total Recoverable Zinc	0.395
Chemical Oxygen Demand (COD)	120

- 5.1.1 Monitoring Periods. Primary metals facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.
- 5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

- 5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark), a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility that drains to the outfall for which sampling was waived.

- 5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.
- 5.1.3.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.
- 5.1.3.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph (b) below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. The certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are**

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

obtained, but no later than the March 31st of the following calendar year, whichever comes first. For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

- 5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.
- 5.3.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snow melt: January through March; April through June; July through September; and October through December.
- 5.3.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snow melt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for entire permit term.
- 5.3.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan, a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector F

- 5.3.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examination. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (e.g., drought, extended frozen conditions, etc.).
- 5.3.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector G

Sector G - Stormwater Discharges Associated With Industrial Activity From Metal Mining (Ore Mining and Dressing) Facilities

RESERVED

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

Sector H - Stormwater Discharges Associated With Industrial Activity From Inactive Coal Mines Not Under SMCRA Bond and Inactive Coal Mining-Related Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector H: Inactive Coal Mines and Inactive Coal Mining-Related Facilities	Sampling Required?	Table Number
1221	Bituminous Coal and Lignite Surface Mining	Yes	H-1
1222	Bituminous Coal Underground Mining	Yes	H-1
1231	Anthracite Mining	Yes	H-1
1241	Coal Mining Services	Yes	H-1

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

Limitations. Storm water discharges from inactive mining activities occurring on Federal lands where an operator cannot be identified are not eligible for coverage under this permit.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in section 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

Most active coal mining-related areas are subject to sediment and erosion control regulations of the U.S. Office of Surface Mining (OSM) that enforces the Surface Mining Control and Reclamation Act (SMCRA). OSM has granted authority to most coal-producing states to implement SMCRA through State SMCRA regulations. All SMCRA requirements regarding control of erosion, siltation and other pollutants resulting from stormwater runoff, including road dust resulting from erosion, shall be primary requirements of the pollution prevention plan and shall be included in the contents of the plan directly, or by reference. Where determined to be appropriate for protection of water quality, additional sedimentation and erosion controls may be warranted.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

- 3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in part 4.1.
- 3.2 Contents of Plan. The plan shall include at a minimum, the following items:
- 3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.
- 3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources that may reasonably be expected to add significant amounts of pollutants to stormwater discharges or that may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials that may potentially be significant pollutant sources. Each plan shall include, at a minimum:
- 3.2.2.1 Drainage. A site map, such as a drainage map required for SMCRA permit applications that indicate drainage areas and stormwater outfalls. These shall include but not be limited to the following:
- Indicate drainage direction and discharge points from all applicable mining-related areas, including culvert and sump discharges from roads and rail beds and also from equipment and maintenance areas subject to storm runoff of fuel, lubricants and other potentially harmful liquids.
- Location of each existing erosion and sedimentation control structure or other control measures for reducing pollutants in stormwater runoff.
- Identify receiving streams or other surface water bodies.
- Locations exposed to precipitation that contain acidic spoil, refuse or unreclaimed disturbed areas.
- List locations where major spills or leaks of toxic or hazardous pollutants have occurred.
- Locations where liquid storage tanks containing potential pollutants, such as caustics, hydraulic fluids and lubricants, are exposed to precipitation.
- Locations where fueling stations, vehicle and equipment maintenance areas are exposed to precipitation.
- Locations at outfalls and the types of discharges contained in the drainage areas of the outfalls.
- For each area of the facility that generates stormwater discharges associated with the mining-related activity with a reasonable potential for containing significant amounts of pollutants, the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

plan should include a prediction of the direction of flow, and an identification of the types of pollutants that are likely to be present in stormwater discharges associated with the activity. Factors to consider include the toxicity of the pollutant; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 Spills and Leaks - A list of significant spills and leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of any existing discharge sampling data describing pollutants in stormwater discharges from the portions of the facility covered by this permit, including a summary of any sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: truck traffic on haul roads and resulting generation of sediment subject to runoff and dust generation; fuel or other liquid storage; pressure lines containing slurry, hydraulic fluid or other potential harmful liquids; and loading or temporary storage of acidic refuse or spoil. Specific potential pollutants shall be identified, where known.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls.
 - 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas that may contribute pollutants to stormwater discharges in a clean, orderly manner. These would be practices that would minimize the generation of pollutants at the source or before it would be necessary to employ sediment ponds or other control measures at the discharge outlets. Where applicable, such measures or other equivalent measures would include the following: sweepers and covered storage to minimize dust generation and storm runoff; conservation of vegetation where possible to minimize erosion; watering of haul roads to minimize dust generation;

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

collection, removal, and proper disposal of waste oils and other fluids resulting from vehicle and equipment maintenance; or other equivalent measures.

- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems. Where applicable, such measures would include the following: removal and proper disposal of settled solids in catch basins to allow sufficient retention capacity; periodic replacement of siltation control measures subject to deterioration such as straw bales; inspections of storage tanks and pressure lines for fuels, lubricants, hydraulic fluid or slurry to prevent leaks due to deterioration or faulty connections; or other equivalent measures.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills that can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - In addition to or as part of the comprehensive site evaluation required under paragraph H.3.2.4 of this section, qualified facility personnel shall be identified to inspect designated areas of the facility at appropriate intervals specified in the SWPPP. The following shall be included in the plan:
- 3.2.3.4.1 Inactive Mining-Related Areas Not Under SMCRA Bond - The plan shall require annual inspections by the facility representative except in situations referred to in paragraph H.3.2.3.7.
- 3.2.3.4.2 Inspection Records - The plan shall require that inspection records of the facility representative and those of the SMCRA authority inspector, if applicable, shall be maintained. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections.
- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify periodic dates for such training.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges) along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

3.2.3.7 Non-stormwater Discharges

The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges such as drainage from underground portions of inactive mines or floor drains from maintenance or coal handling buildings. The certification shall include the identification of potential significant sources of non-stormwater discharges at the site, a description of the results of any test and/or evaluation, a description of the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit.

Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

Any facility that is unable to provide the certification required (testing or other evaluation for non-stormwater discharges) must notify the Division of Water Resources not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater to the storm discharge lines; and why adequate tests for such storm discharge lines were not feasible. Non-stormwater discharges to waters of the state that are not authorized by an NPDES permit are unlawful, and must be terminated.

3.2.3.8 Sediment and Erosion Control - The plan shall identify areas that, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion and reduce sediment concentrations in stormwater discharges. SMCRA requirements regarding sediment and erosion control measures are primary requirements of the pollution prevention plan for mining-related areas subject to SMCRA authority. The following sediment and erosion control measures or other equivalent measures, should be included in the plan where reasonable and appropriate for all areas subject to stormwater runoff:

3.2.3.9 Stabilization Measures - Interim and permanent stabilization measures to minimize erosion and lessen amount of structural sediment control measures needed, including: mature vegetation preservation; temporary seeding; permanent seeding and planting; temporary mulching, matting, and netting; sod stabilization; vegetative buffer strips; temporary chemical mulch, soil binders, and soil palliatives; nonacid road surfacing material; and protective trees.

3.2.3.10 Structural Measures - Structural measures to lessen erosion and reduce sediment discharges, including: silt fences; earth dikes; straw dikes; gradient terraces; drainage swales; sediment traps; pipe slope drains; porous rock check dams; sedimentation ponds; riprap channel protection; capping of contaminated sources; and physical/chemical treatment of stormwater.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

3.2.3.11 Management of Flow - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (other than those as sediment and erosion control measures listed above) used to manage stormwater runoff in a manner that reduces pollutants in stormwater runoff from the site. The plan shall provide that the measures, which the permittee determines to be reasonable and appropriate, shall be implemented and maintained. Appropriate measures may include: discharge diversions; drainage/stormwater conveyances; runoff dispersion; sediment control and collection; vegetation/soil stabilization; capping of contaminated sources; treatment; or other equivalent measures.

3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at intervals specified in the plan, but in no case less than once a year. Such evaluations shall provide:

Areas contributing to a stormwater discharge associated with coal mining-related areas shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). These areas include haul and access roads; railroad spurs, sidings, and internal haulage lines; conveyor belts, chutes and aerial tramways; equipment storage and maintenance yards; coal handling buildings and structures; and inactive mines and related areas. Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures, which are identified in the plan, shall be observed to ensure that they are operating correctly. A visual evaluation of any equipment needed to implement the plan, such as spill response equipment, shall be made.

Based on the results of the evaluation, the description of potential pollutant sources identified in the plan and pollution prevention measures and controls identified in the plan shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner. For inactive mines, such revisions may be extended to a maximum of 12 weeks after the evaluation.

A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

Where compliance evaluation schedules overlap with inspections, the compliance evaluation may be conducted in place of one such inspection. Where annual site compliance evaluations are shown in the plan to be impractical for inactive mining sites due to the remote location and inaccessibility of the site, site inspections required under this part shall be conducted at appropriate intervals specified in the SWPPP, but, in no case less than once in 3 years.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least four times per calendar year (quarterly), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table H-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table H-1. Benchmark Monitoring Requirements for Inactive Coal Mining Facilities

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Aluminum	0.75
Total Recoverable Iron	5.0
Total Suspended Solids	150

5.1.1 Monitoring Periods. Inactive coal mining facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next monitoring period and submit the data along with the data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility that drains to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph b. below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph b. below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever**

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

comes first. For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the following address:

Mining Section Tennessee Division of Water Resources
3711 Middlebrook Pike Knoxville, TN 37921

- 5.3 Visual Examination of Stormwater Quality. Visual examinations are not required at inactive areas not under SMCRA bond.

Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater runoff or snow melt: Quarterly-January through March; April through June; July through September; and October through December. Semi-annually - January through June and July through December.

- 5.3.1 Examinations shall be made of samples collected within the first 60 minutes (or as soon thereafter as practical, but not to exceed two hours) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual will carry out the collection and examination of discharges for the life of the permit.
- 5.3.2 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.3 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfalls provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explaining in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector H

- 5.3.4 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examination. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.5 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

Sector I - Stormwater Discharges Associated With Industrial Activity From Oil and Gas Extraction Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector I: Oil or Gas Extraction Facilities	Sampling Required?	Table Number
1311	Crude Petroleum and Natural Gas	No	
1321	Natural Gas Liquids	No	
1381	Drilling Oil and Gas Wells	No	
1382	Oil and Gas Field Exploration Services	No	
1389	Oil and Gas Field Services, NEC	No	
2911	Oil Refining	Yes	I-1

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

Limitations. Storm water discharges associated with industrial activity from inactive oil and gas operations occurring on Federal lands where an operator cannot be identified are not covered by this permit.

2. Special Conditions

There are no additional requirements beyond those listed in part 3 of the TMSP.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in part 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Paragraph 11.I.3.a.(1)(c) of this sector (Spills and Leaks) have occurred, location of any areas where Reportable Quantity (RQ) releases have occurred; and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas and storage areas, chemical mixing areas, construction and drilling areas. The site map will indicate all areas subject to the effluent guidelines requirement of "No Discharge" in accordance with 40 CFR 435.32 and the existing structural controls to achieve compliance with the "No Discharge" requirement. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. The permittee should consider the cause of RQ releases, the materials used to contain and remediate releases and any other aspect of releases or clean-up which could potentially contribute pollutants to a stormwater discharge. Flows with a significant potential for causing erosion shall be identified.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.

3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.

3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; chemical, cement, mud or gel mixing activities; outdoor manufacturing or processing activities; drilling or mining activities; significant dust or particulate generating processes; and onsite waste disposal practices, equipment cleaning and rehabilitation activities. List any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.

In its description of potential pollutant sources, a facility must include information about the RQ release which triggered the permit application requirements. Such information must include: the nature of the release (e.g., spill of oil from a drum storage area); the amount of oil or hazardous substance released; amount of substance recovered; date of the release; cause of the release (e.g., poor handling techniques as well as lack of containment in area); area affected by release, including land and waters; procedure to cleanup release; actions or procedures implemented to prevent or better respond to a release; and remaining potential contamination of stormwater from release. The analysis shall take into account human health risks, the control of drinking water intakes, and the designated uses of the receiving stream.

3.2.3 Measures and Controls. Each facility covered by this permit shall develop and implement stormwater management controls appropriate for the facility. The controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such measures:

3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.

3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems. The preventative maintenance program shall also include the inspection of all on site and off site mixing tanks and equipment, and all vehicles which carry supplies and chemicals to oil field activities.

3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Materials shall be stored indoors where possible, and drainage systems designed to discharge downstream from drinking water intakes. Where appropriate, specifying material handling procedures, storage

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

- 3.2.3.4 Inspections - In addition to or as part of the comprehensive site evaluation, qualified facility or plant personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. All equipment and areas addressed in the pollution prevention plan shall be inspected at a minimum of 6-month intervals. Areas where equipment and vehicles which store, mix or transport hazardous materials will be inspected routinely, but not less than quarterly. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify periodic dates for such training.

- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan. All records shall be kept for a period of not less than 3 years.

- 3.2.3.7 Non-stormwater Discharges

The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

- 3.2.3.8 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.9 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion. Unless covered by the General Permit for Construction Activity, the additional erosion control requirement for well drillings oil, sand, and shale mining areas are as follows:
- 3.2.3.9.1 Site Description - Each plan shall provide a description of the following: 1) a description of the nature of the exploration activity; 2) estimates of the total area of the site and the area of the site that is expected to be disturbed due to the exploration activity; 3) an estimate of the runoff coefficient of the site; 4) a site map indicating drainage patterns and approximate slopes, the location of major control structures identified in the plan, and surface waters; and 5) the name of the receiving water(s) and the ultimate receiving water(s) of the runoff.
- 3.2.3.9.2 Controls - The pollution prevention plan shall include a description of controls appropriate for the activity and implement such controls. The description of controls shall address the following minimum components:
- A description of vegetative practices designed to preserve existing vegetation where attainable and revegetate open areas as soon as practicable after grade drilling. Such practices may include: temporary seeding, permanent seeding, mulching, sod stabilization, vegetative buffer strips, protection of trees, or other equivalent measures. The operator shall initiate appropriate vegetative practices on all disturbed areas within 14 calendar days of the last activity at that area.
 - A description of structural practices that, to the degree attainable, divert flows from exposed soils, store flows or otherwise limit runoff from exposed areas of the site. Such practices may include straw bale dikes, silt fences, earth dikes, brush barriers, drainage swales, check dams, subsurface drain, pipe slope drain, level spreaders storm drain inlet protection, rock outlet protection, sediment traps, temporary sediment basins, or other equivalent measures.
 - Offsite vehicle tracking of sediments shall be minimized.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

- Procedures in a plan shall provide that all erosion controls on the site are inspected at least once every 7 calendar days. Weekly inspections are necessary to ensure erosion controls continue to effectively reduce the amount of sediment carried offsite. A silt fence or silt trap is no longer effective when filled with silt.

- 3.2.3.9.3 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide the measures that the permittee determines to be reasonable and appropriate which shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, wet detention/retention devices, or other equivalent measures.
- 3.2.3.9.4 Reportable Quantity (RQ) Release - The permittee must describe the measures taken to clean-up RQ releases or related spills of materials, as well as measures proposed to avoid future releases of RQs. Such measures may include, among others: improved handling or storage techniques; containment around handling areas of liquid materials; and use of improved spill cleanup materials and techniques.
- 3.2.3.9.5 Vehicle and Equipment Storage Areas - The storage of vehicles and equipment awaiting or having completed maintenance must be confined to designated areas (delineated on the site map). The plan must describe measures that prevent or minimize contamination of the stormwater runoff from these areas. The facility may consider the use of drip pans under vehicles and equipment, indoor storage of the vehicles and equipment, installation of berming and diking of this area, or other equivalent measures.
- 3.2.3.9.6 Vehicle and Equipment Cleaning and Maintenance Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from all areas used for vehicle and equipment cleaning. The facility may consider performing all cleaning operations indoors, covering the cleaning operation, ensuring that all washwaters drain to a sanitary sewer, and/or collecting the stormwater runoff from the cleaning area and providing treatment or recycling. The discharge of vehicle and equipment wash waters, including tank cleaning operations, are not authorized by this permit and must be authorized under a separate NPDES permit or discharged to a sanitary sewer in accordance with applicable industrial pretreatment requirements.

The plan must describe measures that prevent or minimize contamination of the stormwater runoff from all areas used for vehicle and equipment maintenance and rehabilitation. The facility may consider performing all maintenance activities indoors, using drip pans, maintaining an organized inventory of materials used in the shop, draining all parts of fluids prior to disposal, prohibiting the practice of hosing down the shop floor where the practice would result in the exposure of pollutants to stormwater, using dry cleanup methods, collecting

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

the stormwater runoff from the maintenance area and providing treatment or recycling, or other equivalent measures.

3.2.3.9.7 **Materials and Chemical Storage Areas** - Storage units of all chemicals and materials (e.g., fuels, oils, used filters, spent solvents, paint wastes, radiator fluids, transmission fluids, hydraulic fluids, detergents drilling mud components, acids, organic additives) must be maintained in good condition so as to prevent contamination of stormwater. Hazardous materials must be plainly labeled. The plan must describe measures that prevent or minimize contamination of the stormwater runoff from such storage areas. The facility may consider indoor storage of the materials and/or installation of berming and diking at the area.

3.2.3.9.8 **Chemical Mixing Areas** - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from chemical mixing areas. The facility may consider covering the mixing area, using spill and overflow protection, minimizing run-on of stormwater to the mixing area, using dry cleanup methods, and/or collecting the stormwater runoff and providing treatment or recycling. The facility may consider installation of berming and diking of the area.

3.2.4 **Comprehensive Site Compliance Evaluation.** Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:

Areas contributing to a stormwater discharge associated with industrial activity (e.g., materials and chemical storage areas, vehicle and equipment cleaning and maintenance areas, vehicle and equipment storage areas, chemical mixing areas, and areas of materials handling at the drill site areas) shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.

Based on the results of the evaluation, the description of potential pollutant sources identified in the plan and pollution prevention measures and controls identified in the plan shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.

A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation and major observations relating to the implementation of the stormwater pollution prevention plan the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

Where compliance evaluation schedules overlap with inspections required, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those listed in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table I-1 and I-2 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table I-1. Benchmark Monitoring Requirements for Oil Refining Facilities

Pollutants of Concern	Benchmark
Oil and Grease	15
Total Suspended Solids	150 mg/L
Total Recoverable Lead	0.156 mg/L
Total Recoverable Nickel	0.875 mg/L
Total Recoverable Zinc	0.395 mg/L
Ammonia Nitrogen	19 mg/L
Nitrate+Nitrite Nitrogen	0.68 mg/L

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

- 5.1.1 Monitoring Periods. Paperboard mills shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.
- 5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

- 5.1.3 Sampling Waiver
- 5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

(such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

- 5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility that drains to the outfall for which sampling was waived.
- 5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.
- 5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.
- 5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph (b) below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snow melt: January through March; April through June; July through September; and October through December.

5.3.1 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed one hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual will carry out the collection and examination of discharges for the life of the permit.

5.3.2 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examination. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.3.3 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector I

- 5.3.4 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.5 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfalls provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explaining in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

Sector J - Stormwater Discharges Associated With Industrial Activity From Construction Sand and Gravel Mining and Processing and Dimension Stone Mining and Quarrying Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector J: Construction Sand and Gravel Mining and Processing and Dimension Stone Mining and Quarrying Facilities	Sampling Required?	Table Number
1411	Dimension Stone	Yes	J-3
1422	Crushed and Broken Limestone	Yes	J-1 & 2
1423	Crushed and Broken Granite	Yes	J-1 & 2
1429	Crushed and Broken Stone, NEC	Yes	J-1 & 2
1442	Construction Sand and Gravel	Yes	J-1 & 2
1446	Industrial Sand	Yes	J-1 & 2
1455	Kaolin and Ball Clay	Yes	J-3
1459	Clay, Ceramic, and Refractory Minerals, NEC	Yes	J-3
1474	Potash, Soda, and Borate Minerals	Yes	J-3
1475	Phosphate Rock	Yes	J-3
1479	Chemical and Fertilizer Mineral Mining, NEC	Yes	J-3
1481	Nonmetallic Minerals Services Except Fuels	Yes	J-3
1499	Miscellaneous Nonmetallic Minerals, Except Fuels	Yes	J-3

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

Limitations on Coverage. The following stormwater discharges associated with industrial activity are not authorized by this permit:

- Storm water discharges associated with industrial activity which is subject to an existing effluent limitation guideline (40 CFR Part 436).
- Storm water discharges associated with industrial activity from inactive mining activities occurring on Federal lands where an operator cannot be identified are not eligible for coverage under this permit.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in section 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in part 4.1.

3.2 Contents of Plan. The plan shall include at a minimum, the following items:

3.2.1.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each stormwater pollution prevention plan must describe industrial activities, significant materials, and physical features of the facility that may contribute to stormwater runoff or, during periods of dry weather, result in dry weather flows and mine pumpout. Plans must describe the following elements:

3.2.2.1 Drainage - The plan must contain a map of the site that shows the pattern of stormwater drainage, structural or nonstructural features that control pollutants in stormwater runoff and process wastewater discharges, surface water bodies (including wetlands), places where significant materials are exposed to rainfall and runoff, and locations of major spills and leaks that occurred in the 3 years prior to the date of the submission of an NOI to be covered under this permit. The map also must show areas where the following activities take place: fueling, vehicle and equipment maintenance and/or cleaning, loading and unloading, material storage (including tanks or other vessels used for liquid or waste storage), material processing, and waste disposal, haul roads, access roads, and rail spurs. In addition, the map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

3.2.2.1.1 Inventory of Exposed Materials - Facility operators are required to carefully conduct an inspection of the site and related records to identify significant materials that are or may be exposed to stormwater. The inventory must address materials that within 3 years prior to the date of the submission of an NOI to be covered under this permit have been handled, stored, processed, treated, or disposed of in a manner to allow exposure to stormwater. Findings of the inventory must be documented in detail in the pollution prevention plan. At a minimum, the plan must describe the method and location of onsite storage or disposal; practices used to minimize contact of materials with rainfall and runoff; existing structural and nonstructural controls that reduce pollutants in stormwater runoff; existing structural controls that limit process wastewater discharges; and any treatment the runoff receives before it is discharged to surface waters or a separate storm sewer system. The description must be updated whenever there is a significant change in the types or amounts of materials, or material management practices that may affect the exposure of materials to stormwater.

3.2.2.2 Significant Spills and Leaks - The plan must include a list of any significant spills and leaks of toxic or hazardous pollutants that occurred in the 3 years prior to the date of the submission of an NOI to be covered under this permit. Significant spills include, but are not limited to, releases of oil or hazardous substances in excess of quantities that are reportable under Section

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

311 of CWA (see 40 CFR 110.10 and 117.21) or Section 102 of the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) (see 40 CFR 302.4). Significant spills may also include releases of oil or hazardous substances that are not in excess of reporting requirements and releases of materials that are not classified as oil or a hazardous substance.

3.2.2.3 Sampling Data - Any existing data on the quality or quantity of stormwater discharges from the facility must be described in the plan. The description should include a discussion of the methods used to collect and analyze the data. Sample collection points should be identified in the plan and shown on the site map.

3.2.2.4 Risk Identification and Summary of Potential Pollutant Sources - The description of potential pollution sources culminates in a narrative assessment of the risk potential that sources of pollution pose to stormwater quality. This assessment should clearly point to activities, materials, and physical features of the facility that have a reasonable potential to contribute significant amounts of pollutants to stormwater. Any such industrial activities, significant materials, or features must be addressed by the measures and controls subsequently described in the plan. In conducting the assessment, the facility operator must consider the following activities: loading and unloading operations; outdoor storage activities; outdoor processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The assessment must list any significant pollution sources at the site and identify the pollutant parameter or parameters (i.e., total suspended solids, total dissolved solids, etc.) associated with each source.

3.2.3 Measures and Controls. Following completion of the source identification and assessment phase, the permittee must evaluate, select, and describe the pollution prevention measures, best management practices (BMPs), and other controls that will be implemented at the facility. The permittee must assess the applicability of the following BMPs for their site: discharge diversions, drainage/stormwater conveyance systems, runoff dispersions, sediment control and collection mechanisms, vegetation/soil stabilization, and capping of contaminated sources. In addition, BMPs include processes, procedures, schedules of activities, prohibitions on practices, and other management practices that prevent or reduce the discharge of pollutants in stormwater runoff.

The pollution prevention plan must discuss the reasons each selected control or practice is appropriate for the facility and how each will address the potential sources of stormwater pollution. The plan also must include a schedule specifying the time or times during which each control or practice will be implemented. In addition, the plan should discuss ways in which the controls and practices relate to one another and, when taken as a whole, produce an integrated and consistent approach for preventing or controlling potential stormwater contamination problems.

3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.

3.2.3.2 Preventive Maintenance - The maintenance program requires periodic removal of debris from discharge diversions and conveyance systems. These activities should be conducted in the spring, after snowmelt, and during the fall season. Permittees using ponds to control their

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

effluents frequently use impoundments or sedimentation ponds as their BAT/BCT. Maintenance schedules for these ponds must be provided in the pollution prevention plan.

3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills, which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

3.2.3.4 Inspections - Operators of active facilities are required to conduct quarterly visual inspections of all BMPs. Temporarily and permanently inactive operations are required to perform annual inspections. The inspections shall include: 1) an assessment of the integrity of stormwater discharge diversions, conveyance systems, sediment control and collection systems, and containment structures; 2) visual inspections of vegetative BMPs, serrated slopes, and benched slopes to determine if soil erosion has occurred; and 3) visual inspections of material handling and storage areas and other potential sources of pollution for evidence of actual or potential pollutant discharges of contaminated stormwater.

The inspection must be made at least once in each designated period during daylight hours unless there is insufficient rainfall or snow-melt to produce a runoff event. Inspections shall be conducted in each of the following periods for the purposes of inspecting stormwater quality associated with stormwater runoff and snow melt: January through March (stormwater runoff or snow melt); April through June(stormwater runoff); July through September (stormwater runoff); October through December (stormwater runoff or snow melt).

3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify periodic dates for such training.

3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents such as spills or other discharges along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. The permittee must describe procedures for developing and retaining records on the status and effectiveness of plan implementation. The plan must address spills, monitoring, and BMP inspection and maintenance activities. Ineffective BMPs must be recorded and the date of their corrective action noted.

3.2.3.7 Non-stormwater Discharges

The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with subsection 11.J.3.2.3.7 (Failure to Certify) of this permit.

Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not permitted under an individual NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

3.2.3.7 Failure to Certify. - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe the procedure of any test conducted for the presence of non-stormwater discharges to the storm sewer and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful and must be terminated.

3.2.3.8 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.

Permittees must indicate the location and design for proposed BMPs to be implemented prior to land disturbance activities. For sites already disturbed but without BMPs, the permittee must indicate the location and design of BMPs that will be implemented. The permittee is required to indicate plans for grading, contouring, stabilization, and establishment of vegetative cover for all disturbed areas, including road banks. Reclamation activities must continue until final closure notice has been issued.

3.2.3.9 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see subsection 11.J.3.2.2.4 (Description of Potential Pollutant Sources) of this permit] shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, wet detention/retention devices, or equivalent measures. In addition, the permittee must describe the stormwater pollutant source area or activity (i.e., loading and unloading operations, raw material storage piles, etc.) to be controlled by each stormwater management practice.

- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but, in no case less than once a year. When annual compliance evaluations are shown in the plan to be impractical for inactive mining sites, due to remote location and inaccessibility, site evaluations must be conducted at least once every 3 years. Such evaluations shall provide:
- 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with subsection 11J.3.2.2.4 (Description of Potential Pollutant Sources) of this permit and pollution prevention measures and controls identified in the plan in accordance with section 11.J.3.2.3 (Measures and Controls) of this permit shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 The stormwater pollution prevention plan must describe the scope and content of comprehensive site evaluation that qualified personnel will conduct to 1) confirm the accuracy of the description of potential pollution sources contained in the plan, 2) determine the effectiveness of the plan, and 3) assess compliance with the terms and conditions of the permit. Where compliance evaluation schedules overlap with inspections, the compliance evaluation may be conducted in place of one such inspection.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

4. Numeric Effluent Limitations

In addition to the numeric effluent limitations described in subpart 5.2 (Coal Pile Runoff) of the TMSP, the following effluent limitations shall be met by existing and new discharges with:

Mine Dewatering Activities at Construction Sand and Gravel: The provisions of this paragraph are applicable to stormwater discharges from the industrial sand and crushed stone mining facilities.

Table J-1. Numeric Effluent Limits for Construction Sand and Gravel Mining and Dimension Stone Mining (SIC 1422-1429, 1442, 1446)

Pollutants of Concern	Daily Maximum	30-day Average
Total Suspended Solids (TSS)	45 mg/L	25 mg/L
pH	6.0-9.0 standard units	

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Numeric Effluent Limitations as described in part 4 of this sector (above) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least four times per calendar year (quarterly), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Tables J-1 and J-2 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

Table J-2. Benchmark Monitoring Requirement for Construction Sand and Gravel Mining and Dimension Stone Mining (SIC 1442, 1446)

Pollutants of Concern	Benchmark [mg/L]
Nitrate plus Nitrite Nitrogen	0.68

Table J-3. Benchmark Monitoring Requirement for SICs 1411, 1455, 1459, 1474-1479, 1481, 1488, 1499

Pollutants of Concern	Benchmark
Total Suspended Solids (TSS)	150 mg/L

- 5.1.1 Monitoring Periods. Facilities subject to analytical monitoring requirements shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.
- 5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available,

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with the data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility that drains to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph b below, under penalty

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent guidelines.

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the following address:

<p>Mining Section Tennessee Division of Water Resources 3711 Middlebrook Pike Knoxville, TN 37921</p>

5.3 Quarterly Visual Examination of Stormwater Quality. Mining and processing facilities covered under this sector shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examinations must be made at least once in each designated period [described below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

5.3.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snow melt: January through March; April through June; June through September; and October through December.

5.3.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed one hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector J

event. Where practicable, the same individual will carry out the collection and examination of discharges for the life of the permit.

- 5.3.3 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.4 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.5 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfalls provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explaining in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector K

Sector K - Stormwater Discharges Associated With Industrial Activity From Hazardous Waste Treatment, Storage, or Disposal Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from facilities that treat, store, or dispose of hazardous wastes, including those that are operating under interim status or a permit under subtitle C of RCRA except for discharges from any of the following types of facilities:

- landfills operated in conjunction with other industrial or commercial operations when the landfill only receives wastes generated by the industrial or commercial operation directly associated with the landfill;
- landfills operated in conjunction with other industrial or commercial operations when the landfill receives wastes generated by the industrial or commercial operation directly associated with the landfill and also receives other wastes provided the other wastes received for disposal are generated by a facility that is subject to the same provisions in 40 CFR Subchapter N as the industrial or commercial operation or the other wastes received are of similar nature to the wastes generated by the industrial or commercial operation;
- landfills operated in conjunction with Centralized Waste Treatment (CWT) facilities subject to 40 CFR Part 437 so long as the CWT facility commingles the landfill wastewater with other non-landfill wastewater for discharge. A landfill directly associated with a CWT facility is subject to this part if the CWT facility discharges landfill wastewater separately from other CWT wastewater or commingles the wastewater from its landfill only with wastewater from other landfills; or
- landfills operated in conjunction with other industrial or commercial operations when the landfill receives wastes from public service activities so long as the company owning the landfill does not receive a fee or other remuneration for the disposal service.

SIC Code	Sector K: Hazardous Waste Treatment Storage or Disposal Facilities	Sampling Required?	Table Number
--	Hazardous Waste Treatment Storage or Disposal Facilities (TSDF)	Yes	K-1 or 2

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector K

determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in section 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under subsection 11.K.3.2.2.3 (Spills and Leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas and storage areas. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemicals; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector K

leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., chemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
 - 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.
 - 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., berms, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector K

3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should consider specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

3.2.3.4 Inspections - In addition to or as part of the comprehensive site evaluation required under paragraph 11.K.3.2.4 of this section, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify periodic dates for such training.

3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

3.2.3.7 Non-stormwater Discharges

The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector K

Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

- 3.2.3.8 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.9 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.10 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 11.K.3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, wet detention/retention devices, or other equivalent measures.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP but in no case less than once a year. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector K

- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.K.3.2.2 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.K.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.K.3.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

In addition to the numeric effluent limitations described in subpart 5.2 (Coal Pile Runoff) of the TMSP, the following effluent limitations shall be met by existing and new discharges from Hazardous Waste Landfills subject to 40 CFR 445, Subpart A:

Table K-1 Numeric Effluent Limits for Hazardous Waste Landfills subject to 40 CFR 445, Subpart A

Pollutant of Concern	Daily Maximum [mg/L] (1)	30-day Average [mg/L]
Ammonia	10	4.9
Alpha Terpineol	0.042	0.019
Aniline	0.024	0.015
Benzoic Acid	0.119	0.073
Biochemical Oxygen Demand (BOD ₅)	220	56
Naphthalene	0.059	0.022
pH	6.0 to 9.0	
p-Cresol	0.024	0.015
Phenol	0.048	0.029
Pyridine	0.072	0.025
Total Recoverable Arsenic	1.1	0.54
Total Recoverable Chromium	1.1	0.46
Total Recoverable Zinc	0.535	0.296
Total Suspended Solids (TSS)	88	27

1.) Monitor once per year for each monitoring year.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Numeric Effluent Limitations as described in part 4 of this sector (above) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table K-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table K-2. Benchmark Monitoring Requirements for Treatment, Storage and Disposal Facilities (TSDF) not Covered by Table K-1

Pollutants of Concern	Benchmark [mg/L]
Ammonia	4.0
Total Recoverable Magnesium	0.064
Chemical Oxygen Demand (COD)	120
Total Recoverable Cadmium	0.0021
Total Cyanide	0.022
Total Recoverable Lead	0.156
Total Recoverable Mercury	0.0014
Total Recoverable Selenium	0.005
Total Suspended Solids	150
Total Recoverable Silver	0.0038

5.1.1 Monitoring Periods. TSDFs shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector K

concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility which drains to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector K

the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

- 5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall, or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with the above Sections obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s)]. **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

- 5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a representative stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each of the following periods: January through March, April through June, July through September, and October through December during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.3.1 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector K

event. Where practicable, the same individual should carry out the collection and examination of discharges for entire permit term.

- 5.3.2 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.3 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the observation data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.4 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.5 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

Sector L - Stormwater Discharges Associated With Industrial Activity From Landfills and Land Application Sites

1. Discharges Covered Under This Section.

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from waste disposal at landfills and land application sites that receive or have received industrial wastes. Landfill and land application operators that have stormwater discharges from other types of industrial activities such as vehicle maintenance, truck washing, and/or recycling may be subject to additional requirements specified elsewhere in this permit:

SIC Code	Sector L: Landfills and Land Application Sites	Sampling Required?	Table Number
4953	Refuse Systems	Yes	L-1 or L-2

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

Limitations on Coverage. Storm water discharges associated with industrial activities from inactive landfills and land application sites occurring on Federal lands where an operator cannot be identified are ineligible for coverage under this permit.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutant to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations of active and closed landfill cells or trenches, locations of active and closed land application areas, locations of any known leachate springs or other areas where uncontrolled leachate may commingle with runoff, locations of any leachate collection and handling systems, locations where major spills or leaks identified under Part L.3.a.(2)(c) (Spills and Leaks) of this permit have occurred, and locations of the following activities where such activities are exposed to precipitation: fueling station, vehicle and equipment maintenance and/or cleaning areas, and waste and other significant material loading/unloading and storage areas. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemicals; quantities of chemicals used, produced or discharged; the likelihood of contact with stormwater; and the history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, or disposed of in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives. The inventory of exposed materials shall include, but shall not be limited to the significant material management practices employed.

3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.

- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater of sampling data collected during the term of this permit. Permittees shall also provide all available sampling data for leachate generated at the site.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - Include a narrative description of potential pollutant sources associated with any of the following, providing they occur at the facility: fertilizer, herbicide and pesticide application; earth/soil moving; waste hauling and loading/unloading; outdoor storage of significant materials including daily, interim and final cover material stockpiles as well as temporary waste storage areas; exposure of active and inactive landfill and land application areas; uncontrolled leachate flows; failure or leaks from leachate collection and treatment systems; haul roads; and vehicle tracking of sediments. The description shall specifically list any significant potential sources of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
 - 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner. Permittees shall consider providing protected materials storage areas for pesticides, herbicides, fertilizers, and other significant materials.
 - 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.

Where applicable, permittees addressed by this section shall also: 1) maintain containers used for outdoor chemical and significant materials storage to prevent leaking or rupture; 2) maintain all elements of leachate collection and treatment systems to prevent commingling of leachate with stormwater; and 3) maintain the integrity and effectiveness of any intermediate or final cover, including making repairs to the cover as necessary to minimize the effects of settlement, sinking, and erosion.

Provide temporary stabilization (e.g., temporary seeding, mulching, and placing geotextiles on the inactive portions of stockpiles) for the following: materials stockpiled for daily, intermediate, and final cover; inactive areas of the landfill or open dump; landfills or open dump areas that have gotten final covers but where vegetation has yet to establish itself; and land application sites where waste application has been completed but final vegetation has not yet been established.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should consider specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the plan.
- 3.2.3.4.1 For operating landfills and land application sites, inspections shall be conducted at least once every 7 days. Qualified personnel shall inspect areas of landfills that have not yet been finally stabilized, active land application areas, areas used for storage of materials/wastes that are exposed to precipitation, stabilization and structural control measures, leachate collection and treatment systems, and locations where equipment and waste trucks enter and exit the site. Where landfill areas have been finally stabilized and where land application has been completed, or during seasonal arid periods in arid areas (areas with an average annual rainfall of 0 to 10 inches) and semiarid areas (areas with an average annual rainfall of 10 to 20 inches), inspections will be conducted at least once every month. Erosion and sediment control measures shall be observed to ensure they are operating correctly.
- 3.2.3.4.2 For inactive landfills and land application sites, inspections shall be conducted at least quarterly, and qualified personnel shall inspect: landfill stabilization and structural erosion control measures and leachate collection and treatment systems, and all closed land application areas.
- 3.2.3.4.3 A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. The pollution prevention plan shall be revised to address any problems found during inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.
- Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.
- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as conducting inspections, spill response, good housekeeping, conducting inspections and material management practices. The pollution prevention plan shall identify periodic dates for such training.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

maintenance activities shall be documented and records of such activities shall be incorporated into the plan. Landfill operators shall provide for a tracking system for the types of wastes disposed of in each cell or trench of a landfill. Land application site operators shall track the types and quantities of wastes applied in specific areas.

3.2.3.7 Non-stormwater Discharges

3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges including leachate and vehicle wash waters. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).

3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.

3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.

3.2.3.7.4.1 Landfill operators shall provide for temporary stabilization of materials stockpiled for daily, intermediate and final cover. Stabilization practices to consider include, but are not limited to, temporary seeding, mulching, and placing geotextiles on the inactive portions of the stockpiles.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

- 3.2.3.7.4.2 Landfill operators shall provide for temporary stabilization of inactive areas of the landfill which have an intermediate cover but no final cover.
- 3.2.3.7.4.3 Landfill operators shall provide for temporary stabilization of any landfill areas which have received a final cover until vegetation has established itself. Land application site operators shall also stabilize areas where waste application has been completed until vegetation has been established.
- 3.2.3.7.5 Management of Runoff - The plan shall also contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph L.3.a.(2) of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: silt fences, earth dikes, gradient terraces, drainage swales, sediment traps, check dams, pipe slope drains, level spreaders, storm drain inlet protection, rock outlet protection, reinforced soil retaining systems, gabions and temporary or permanent sediment basins, or other equivalent measures. Structural practices should be placed on upland soils as practicable.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity at landfill and land application sites shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
 - 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph L.3.a.(2) of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph L.3.a.(3) of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in timely manner, but in no case more than 12 weeks after the evaluation.
 - 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.L.3.2.4 the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

- 4.1 In addition to the numeric effluent limitations described in subpart 5.2 (Coal Pile Runoff) of the TMSP, the following effluent limitations shown in Table L-1 below shall be met by existing and new contaminated stormwater discharges from landfills which are subject to the requirements of 40 CFR Part 445 Subpart B.

As set forth at 40 CFR Part 445 Subpart B, these numeric limitations apply to contaminated stormwater discharges from Municipal Solid Waste Landfills (MSWLFs) which have not been closed in accordance with 40 CFR 258.60, and contaminated stormwater discharges from those landfills which are subject to the provisions of 40 CFR Part 257 except for discharges from any of the following types of facilities:

- landfills operated in conjunction with other industrial or commercial operations when the landfill only receives wastes generated by the industrial or commercial operation directly associated with the landfill;
- landfills operated in conjunction with other industrial or commercial operations when the landfill receives wastes generated by the industrial or commercial operation directly associated with the landfill and also receives other wastes provided the other wastes received for disposal are generated by a facility that is subject to the same provisions in 40 CFR Subchapter N as the industrial or commercial operation or the other wastes received are of similar nature to the wastes generated by the industrial or commercial operation;
- landfills operated in conjunction with Centralized Waste Treatment (CWT) facilities subject to 40 CFR Part 437 so long as the CWT facility commingles the landfill wastewater with other non-landfill wastewater for discharge. A landfill directly associated with a CWT facility is subject to this part if the CWT facility discharges landfill wastewater separately from other CWT wastewater or commingles the wastewater from its landfill only with wastewater from other landfills; or
- landfills operated in conjunction with other industrial or commercial operations when the landfill receives wastes from public service activities so long as the company owning the landfill does not receive a fee or other remuneration for the disposal service.

- 4.2 The concentration of pollutants in stormwater discharges from landfills subject to the requirements of 40 CFR Part 445 Subpart B (except the 4 types of landfills specifically

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

exempted, as shown above in 4.1 above) shall not exceed the effluent limitations in Table L-1. For the 4 types of landfills specified in 4.1, the permittee shall monitor its stormwater for the parameters listed in Table L-2 as required below.

Table L-1. Numeric Effluent Limitations for Landfills and Land Application Sites

Effluent Characteristics	Effluent Limitations (mg/L)	
	Maximum for any 1 day	Average of daily values for 30 consecutive days shall not exceed
Ammonia	10	4.9
Alpha Terpineol	0.033	0.016
Benzoic Acid	0.12	0.071
Biochemical Oxygen Demand (BOD ₅)	140	37
p-Cresol	0.025	0.014
pH	Within the range of 6.0 to 9.0	
Phenol	0.026	0.015
Total Suspended Solids (TSS)	88	27
Zinc (Total)	0.20	0.11

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Numeric Effluent Limitations as described in part 4 of this sector (above) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For the breakdown of applicable monitoring requirements for different types of landfills, see Paragraph 4 – Numeric Effluent Limitations. Facilities must report in accordance with 5.2 (Reporting). In addition to the applicable parameters listed in Table L-1 above and Table L-2 below (depending on the type of landfill, as determined in Paragraph 4 – Numeric Effluent Limitations), the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table L-2. Benchmark Monitoring Requirements for Landfills and Land Application Sites

Pollutants of Concern	Benchmark [mg/L]
Total Suspended Solids (TSS) ⁱ	150
Total Recoverable Iron ⁱⁱ	5
Total Recoverable Aluminum ⁱⁱⁱ	0.75
Total Recoverable Magnesium ⁱⁱⁱ	0.064

i) Applicable to all landfill and land application sites.

ii) Applicable to all facilities except Municipal Solid Waste Landfill areas closed in accordance with 40 CFR 258.60 requirements.

iii) Applicable only to Municipal Solid Waste Landfill areas closed in accordance with 40 CFR 258.60 requirements.

5.1.1 Monitoring Periods. Landfill/land application sites shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable, permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (e.g., drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility which drains to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

- 5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph (b) below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity, that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of the fact sheet to this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 Reporting

One signed copy of the Discharge Monitoring Report, DMR, (see Addendum D) for numeric effluent limits results or Annual Stormwater Monitoring Report (see Addendum E) for the benchmark results is required to be submitted to the division.

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed Annual Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

The DMR shall be submitted to the division at the following address thirty days after the sampling event:

**Enforcement and Compliance Section
Tennessee Division of Water Resources
William R. Snodgrass - Tennessee Tower
312 Rosa L. Parks Avenue, 11th Floor
Nashville, TN 37243-1534**

- 5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.3.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snow melt: January through March; April through June; July through September; October through December.
- 5.3.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.5 When a discharger is unable to conduct a visual examination as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examination. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector L

as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

Sector M - Stormwater Discharges Associated With Industrial Activity From Automobile Salvage Yards

1. Discharges Covered Under This Section

The requirements of this section apply to point source discharges of stormwater associated with industrial activity from facilities engaged in dismantling or wrecking used motor vehicles for parts recycling or resale and for scrap (Standard Industrial Classification (SIC) Code 5015):

SIC Code	Sector M: Automobile Salvage Yards	Sampling Required?	Table Number
5015	Motor Vehicle Parts, Used	Yes	M-1

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each stormwater pollution prevention plan must describe industrial activities, significant materials, and physical features of the facility that may contribute to stormwater runoff or, during periods of dry weather, result in dry weather flows. Plans must include the following elements:

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

- 3.2.2.1 Site Map - The plan must contain a map of the site that shows structural features that control pollutants in stormwater runoff and process wastewater discharges, surface water bodies (including wetlands), places where significant materials are exposed to rainfall and runoff, and locations of major spills and leaks that occurred in the 3 years prior to the date of the submission of an NOI to be covered under this permit. The map must also indicate the flow direction of stormwater runoff. The location of each stormwater outfall associated with an industrial activity, as well as an outline of the drainage area for each stormwater outfall and an indication of the types of discharges in each drainage area must be indicated. The map must indicate the location of each monitoring point. The map must include an estimation (in acres) of the total area used for industrial activity including, but not limited to, dismantling, storage, and maintenance of used motor vehicles and motor vehicle parts. The map must also indicate the location of the following activities where such activities are exposed to precipitation: vehicle storage areas; dismantling areas; parts storage areas, including engine blocks, tires, hub caps, batteries, hoods, and mufflers; fueling stations; vehicle and equipment maintenance areas; cleaning areas (parts, vehicles, and/or equipment); loading and unloading areas; locations used for the treatment, storage, and disposal of wastes; and liquid storage tanks and drums for fuel and other fluids.
- 3.2.2.2 Inventory of Potential Pollutant Sources - Facility operators are required to carefully conduct an inspection of the site to identify significant materials exposed to precipitation that may contribute pollutants to stormwater discharges. The inventory must address materials that within 3 years prior to the date of the submission of an NOI to be covered under this permit have been handled, stored, processed, treated, or disposed of in a manner to allow exposure to stormwater. Findings of the inventory must be documented in detail in the pollution prevention plan. At a minimum, the plan must describe the method and location of onsite storage or disposal; practices used to minimize contact of materials with rainfall and runoff; existing structural and nonstructural controls that reduce pollutants in stormwater runoff; existing structural controls that prohibit/control process wastewater discharges; and any treatment the runoff receives before it is discharged to surface waters or through a separate storm sewer system. The description must be updated whenever there is a significant change in the types or amounts of materials, or material management practices that may affect the exposure of materials to stormwater.
- 3.2.2.3 Significant Spills and Leaks - The plan must include a list of any significant spills and leaks of toxic or hazardous pollutants that occurred in the 3 years prior to the date of the submission of an NOI to be covered under this permit. Significant spills include, but are not limited to, releases of oil or hazardous substances in excess of quantities that are reportable under Section 311 of CWA (see 40 CFR 110.10 and 40 CFR 117.21) or Section 102 of the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) (see 40 CFR 302.4). Significant spills may also include releases of oil or hazardous substances that are not in excess of reporting requirements and releases of materials that are not classified as oil or a hazardous substance. This list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - Any existing data or data collected during the term of this permit describing the quality or quantity of stormwater discharges from the facility must be summarized in the plan. The description should include a discussion of the methods used to collect and analyze the data. Sample collection points should be identified in the plan and shown on the site map.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

- 3.2.2.5 Summary of Potential Pollutant Sources - The description of potential pollution sources should clearly point to activities, materials, and physical features of the facility that have a reasonable potential to contribute significant amounts of pollutants to stormwater discharges. Any such industrial activities, significant materials, or features must be addressed by the measures and controls subsequently described in the plan. In conducting the assessment, the facility operator must consider the potential for the following activities to contribute pollutants: vehicle storage areas; dismantling areas; parts storage areas, including engine blocks, tires, hub caps, batteries, and hoods; fueling stations; vehicle and equipment maintenance areas; cleaning areas (parts and vehicles and/or equipment); loading/unloading areas; locations used for the treatment, storage, and disposal of wastes; and liquid storage tanks and drums for fuel and other fluids.

The assessment must identify the pollutant parameter or parameters (i.e., copper, iron, lead, oil and grease, total suspended solids, etc.) associated with each pollutant source.

- 3.2.3 Measures and Controls. Following completion of the source identification and assessment phase, the permittee must evaluate, select, and describe the pollution prevention measures, best management practices (BMPs), and other controls that will be implemented at the facility. BMPs include processes, procedures, schedules of activities, prohibitions on practices, and other management practices that prevent or reduce the discharge of pollutants in stormwater runoff.

The pollution prevention plan must discuss the reasons each selected control or practice is appropriate for the facility and how each will address the potential sources of stormwater pollution. The plan also must include a schedule specifying the time or times during which each control or practice will be implemented. In addition, the plan should discuss ways in which the controls and practices relate to one another and, when taken as a whole, produce an integrated and consistent approach for preventing or controlling potential stormwater contamination problems.

- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.
- 3.2.3.2 Preventive Maintenance - The preventive maintenance program shall schedule periodic inspections and ensure appropriate maintenance of stormwater management devices and facility equipment and systems. This program will address conditions that could cause breakdowns or failures resulting in the discharge of pollutants to surface waters. The maintenance program shall include periodic removal of debris from discharge diversions, conveyance systems, and impoundments/ponds. These activities should be conducted in the spring, after snow melt, and during the fall season. Maintenance schedules for sedimentation/impoundments must be provided in the pollution prevention plan.
- 3.2.3.3 Spill and Leak Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should consider specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel. After clean-up from a spill, absorbents must be promptly

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

placed in containers for proper disposal. All vehicles that are intended to be dismantled must be properly drained of all fluids upon arrival at the site, or as soon as feasible thereafter, or other equivalent means must be taken to prevent leaks or spills of such fluids.

- 3.2.3.4 Inspections - Upon arrival at the site, or as soon as feasible thereafter, vehicles must be inspected for leaks. Any equipment containing oily parts, hydraulic fluids, or any other types of fluids shall be inspected at least quarterly (four times per year) for signs of leaks. Any outdoor storage of fluids including, but not limited to, brake fluid, transmission fluid, radiator water, and antifreeze, must be inspected at least quarterly for leaks. All outdoor liquid storage containers (e.g., tanks, drums) must be inspected at least quarterly for leaks.

Qualified facility personnel are required to conduct quarterly visual inspections of BMPs. The inspections shall include: 1) an assessment of the integrity of stormwater flow diversion and source minimization systems; 2) visual inspections of dismantling areas, vehicle and equipment maintenance areas, vehicle, equipment, and parts cleaning and storage areas, and other potential sources of pollution for evidence of actual or potential pollutant discharges of contaminated stormwater.

Inspections shall be conducted in each of the following periods: January through March; April through June; July through September; and October through December.

Reports of the quarterly inspections (or more frequent if appropriate) shall be retained as part of the plan. Based on the results of each inspection the plan must be revised as appropriate within 2 weeks after each inspection. Changes in the measures and controls must be implemented on the site in a timely manner, and never more than 12 weeks after completion of the inspection.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. The pollution prevention plan shall include a schedule for training. Employee training must, at a minimum, address the following areas when applicable to a facility: proper handling (collection, storage, and disposal) of oil, used mineral spirits, anti-freeze, and solvents; spill prevention and response; fueling procedures; good housekeeping practices; and used battery management.

- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents such as spills, or other discharges, along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. The permittee must describe procedures for developing and retaining records on the status and effectiveness of plan implementation. The plan must address monitoring, and BMP inspection and maintenance activities. Ineffective BMPs must be reported and the date of their corrective action noted.

- 3.2.3.7 Non-stormwater Discharges

- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with subsection 11.MM.3.2.3.7.3 Failure to Certify of this permit.

- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion. Permittees must consider measures to maximize stabilization of industrial areas using vegetative cover, gravel, impervious surfaces or other appropriate measures.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide measures that the permittee determines to be reasonable and appropriate and shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity (see 11.M.3.2.2.5 (Description of Potential Pollutant Sources) of this permit) shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities,

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

infiltration devices, wet detention/retention devices, or other equivalent measures. In addition, the permittee must describe the stormwater pollutant source area or activity (e.g., dismantling area, storage area, cleaning operations) to be controlled by each stormwater management practice.

The plan must consider management practices, such as berms or drainage ditches on the property line that may be used to prevent run-on from neighboring properties. Berms must be considered for uncovered outdoor storage of oily parts, engine blocks, and above ground liquid storage. The installation of detention ponds must also be considered. The permittee shall consider the installation of a filtering device to receive runoff from industrial areas. The installation of oil/water separators must also be considered.

- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct comprehensive site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. The stormwater pollution prevention plan must describe the scope and content of comprehensive site evaluations that qualified personnel will conduct to 1) confirm the accuracy of the description of potential pollution sources contained in the plan, 2) determine the effectiveness of the plan, and 3) assess compliance with the terms and conditions of the permit. The individual or individuals who will conduct the evaluations must be identified in the plan and should be members of the pollution prevention team. Such evaluations shall provide:
- 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with subsection 11.M.3.2.2.5 (Description of Potential Pollutant Sources) of this permit and pollution prevention measures and controls identified in the plan in accordance with section 11.M.3.2.3 (Measures and Controls) of this permit shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under subsection 11.M.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table M-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table M-1. Benchmark Monitoring Requirements for Automobile Salvage Yards

Pollutants of Concern	Benchmark [mg/L]
Total Suspended Solids	150
Total Recoverable Aluminum	0.75
Total Recoverable Iron	5
Total Recoverable Lead	0.156

- 5.1.1 **Monitoring Periods.** Automobile salvage yards shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

- 5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

- 5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (e.g., drought, extended frozen conditions, etc.).
- 5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in the area of the facility which drains to the outfall for which sampling was waived.

- 5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.
- 5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.
- 5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity, that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and conduct any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.
- 5.2 Reporting Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with the above Sections obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s)]. **The form(s) shall be submitted 30 days after the sampling results are**

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

obtained, but no later than the March 31st of the following calendar year, whichever comes first. For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

- 5.3 Quarterly Visual Examination of Stormwater Quality. All automobile salvage yard facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination(s) must be made at least once in each of the following 3-month periods: January through March, April through June, July through September, and October through December. The examination shall be made during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.
- 5.3.1 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3.2 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.3 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.4 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector M

performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (e.g., drought, extended frozen conditions, etc.).

- 5.3.5 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Sector N - Stormwater Discharges Associated With Industrial Activity From Scrap Recycling and Waste Recycling Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below. Separate permit requirements have been established for recycling facilities that only receive source-separated recyclable materials primarily from non-industrial and residential sources (e.g., common consumer products including paper, newspaper, glass, cardboard, plastic containers, aluminum and tin cans). This includes recycling facilities commonly referred to as material recovery facilities (MRF).

SIC Code	Sector N: Scrap Recycling and Waste and Recycling Facilities	Sampling Required?	Table Number
5093	Scrap and Waste Materials	Yes	N-1

Note: Recycling facilities that are material recovery facilities are not required to sample.

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.1 Contents of Plan. The following general requirements for the stormwater pollution prevention plan are applicable to activities which reclaim and recycle either recyclable no liquid and liquid waste materials. In addition to the general requirements, Paragraph N.3.2 (below) identifies special requirements for scrap recycling and waste recycling facilities (nonsource-separated facilities) that handle no liquid wastes. The recycling facilities, including MRFs (material recovery facilities), that receive only source-separated recyclable materials primarily from non-industrial and residential sources. The plan shall include, at a minimum, the following items:

3.1.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.1.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources or, during periods of dry weather, result in dry weather flows. Each plan shall include, at a minimum:

3.1.3 Drainage. A site map indicating the outfall locations and the types of discharges contained in the drainage areas of the outfalls, an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies (including wetlands), locations where significant materials are exposed to precipitation including scrap and waste material storage and outdoor scrap and waste processing equipment, locations where major spills or leaks identified in this section have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, material storage (including tanks or other vessels used for liquid or waste storage). Scrap recycling facilities that handle turnings that have been previously exposed to cutting fluids will delineate these containment areas. The site map must also identify monitoring locations.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

3.1.4 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

3.1.5 Spills and Leaks - A list of significant spills and leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Significant spills include, but are not limited to, releases of oil

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

or hazardous substances in excess of quantities that are reportable under Section 311 of the Clean Water Act (CWA) (see 40 CFR 110.10 and 117.21) or Section 102 of the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) (see 40 CFR 302.4). Such a list shall be updated as appropriate during the term of the permit.

- 3.1.6 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.1.7 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities, outdoor processing activities; significant dust or particulate generating processes and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., Chemical Oxygen Demand (COD), oil and grease, Total Suspended Solids (TSS), zinc, lead, copper, etc.) of concern shall be identified.
- 3.1.8 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls for scrap recycling and waste recycling facilities (nonsource-separated, no liquid recyclable materials), waste recycling facilities (recyclable liquid wastes), and recycling facilities (source-separated materials) are identified below. At a minimum, the description shall also include a schedule for implementing such controls:
- 3.2. Scrap and Waste Recycling Facilities (nonsource-separated, no liquid recyclable wastes) - The following special conditions have been established for the pollution prevention plan for those scrap and waste recycling facilities that receive, process and provide wholesale distribution of no liquid recyclable wastes, (e.g., ferrous and nonferrous metals, plastics, glass, cardboard, and paper). This section of the permit is intended to distinguish waste recycling facilities that receive both nonrecyclable and recyclable materials from those recycling facilities that only accept recyclable materials primarily from non-industrial and residential sources. Under the description of measures and controls in the stormwater pollution prevention plan, the plan will address all areas that have a reasonable potential to contribute pollutants to stormwater discharges and will be maintained in a clean and orderly manner. At a minimum, the plan will address the following activities and areas within the plan:
- a.) Inbound Recyclable and Waste Material Control Program - The plan shall include a recyclable and waste material inspection program to minimize the likelihood of receiving materials that may be significant pollutant sources to stormwater discharges. At a minimum, the plan shall address the following:
- Provision of information/education (flyers, brochures and pamphlets) to encourage suppliers of scrap and recyclable waste materials to drain residual fluids, whenever applicable, prior to its arrival at the facility. This includes vehicles and equipment engines, radiators, and transmissions, oil-filled transformers, and individual containers or drums;

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

- Activities which accept scrap and materials that may contain residual fluids, e.g., automotive engines containing used oil, transmission fluids, etc., shall describe procedures to minimize the potential for these fluids from coming in contact with either precipitation or runoff. The description shall also identify measures or procedures to properly store, handle and dispose of these residual fluids;
 - Procedures pertaining to the acceptance of scrap lead-acid batteries. Additional requirements for the handling, storage and disposal or recycling of batteries shall be in conformance with conditions for a scrap lead-acid battery program, see below;
 - A description of training requirements for those personnel engaged in the inspection and acceptance of inbound recyclable materials.
- b.) Liquid wastes, including used oil, shall be stored in materially compatible and nonleaking containers and disposed or recycled in accordance with all requirements under the Resource Recovery and Conservation Act (RCRA), and other State or local requirements.
- c.) Scrap and Waste Material Stockpiles/Storage (outdoors) - The plan shall address areas where significant materials are exposed to either stormwater runoff or precipitation. The plan must describe those measures and controls used to minimize contact of stormwater runoff with stockpiled materials, processed materials and nonrecyclable wastes. The plan should include measures to minimize the extent of stormwater contamination from these areas. The operator may consider the use of permanent or semipermanent covers, or other similar forms of protection over stockpiled materials where the operator determines that such measures are reasonable and appropriate. The operator may consider the use of sediment traps, vegetated swales and strips, to facilitate settling or filtering out of pollutants. The operator shall consider within the plan the use of the following BMPs (either individually or in combination) or their equivalent to minimize contact with stormwater runoff:
- Promoting the diversion of runoff away from these areas through such practices as dikes, berms, containment trenches, culverts and/or surface grading;
 - Media filtration such as catch basin filters and sand filters; and,
 - silt fencing; and,
 - Oil/water separators, sumps and dry adsorbents in stockpile areas that are potential sources of residual fluids, e.g., automotive engine storage areas.
- d.) Stockpiling of Turnings Previously Exposed to Cutting Fluids (outdoors) - The plan shall address all areas where stockpiling of industrial turnings previously exposed to cutting fluids occurs. The plan shall implement those measures necessary to minimize contact of surface runoff with residual cutting fluids. The operator shall consider implementation of either of the following two alternatives or a combination of both or equivalent measures:

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

- Alternative 1: Storage of all turnings previously exposed to cutting fluids under some form of permanent or semi-permanent cover. Discharges of residual fluids from these areas to the storm sewer system in the absence of a storm event are prohibited. Discharges to the storm sewer system as a consequence of a storm event are permitted provided the discharge is first directed through an oil/water separator or its equivalent. Procedures to collect, handle, and dispose or recycle residual fluids that may be present shall be identified in the plan, or,
- Alternative 2: Establish dedicated containment areas for all turnings that have been exposed to cutting fluids where runoff from these areas is directed to a storm sewer system, providing the following:
 - i) Containment areas constructed of either concrete, asphalt or other equivalent type of impermeable material;
 - ii) a perimeter around containment areas to prevent runoff from moving across these areas. This would include the use of shallow berms, curbing, or constructing an elevated pad or other equivalent measure;
 - iii) a suitable drainage collection system to collect all runoff generated from within containment areas. At a minimum, the drainage system shall include a plate-type oil/water separator or its equivalent. The oil/water separator or its equivalent shall be installed according to the manufacturer's recommended specifications, whenever available; specifications will be kept with the plan.
 - iv) a schedule to maintain the oil/water separator (or its equivalent) to prevent the accumulation of appreciable amounts of fluids. In the absence of a storm event, no discharge from containment areas to the storm sewer system is prohibited unless covered by a separate NPDES permit;
 - v) Identify procedures for the proper disposal or recycling of collected residual fluids.
- e.) Scrap and Waste Material Stockpiles/Storage (covered or indoor storage) - The plan shall address measures and controls to minimize residual liquids and accumulated particulate matter, originating from scrap and recyclable waste materials stored indoors or under cover, from coming in contact with surface runoff. The operator shall consider including in the plan the following or equivalent measures:
 - Good housekeeping measures, including the use of dry absorbent or wet vacuum clean-up methods, to collect, handle, store and dispose or recycle residual liquids originating from recyclable containers, e.g., beverage containers, paint cans, household cleaning products containers, etc.;
 - Prohibiting the practice of allowing wash water from tipping floors or other processing areas from discharging to any portion of a storm sewer system;
 - Disconnecting or sealing off all existing floor drains connected to any portion of the storm sewer system.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

f.) Scrap and Recyclable Waste Processing Areas - The plan shall address areas where scrap and waste processing equipment are sited. This includes measures and controls to minimize surface runoff from coming in contact with scrap processing equipment. In the case of processing equipment that generate visible amounts of particulate residue, e.g., shredding facilities, the plan shall describe good housekeeping and preventive maintenance measures to minimize contact of runoff with residual fluids and accumulated particulate matter. At a minimum, the operator shall consider including in the plan the following or other equivalent measures:

- A schedule of periodic inspections of equipment for leaks, spills, malfunctioning, worn or corroded parts or equipment;
- Preventive maintenance program to repair and/or maintain processing equipment;
- Measures to minimize shredder fluff from coming in contact with surface runoff;
- Use of dry-absorbents or other cleanup practices to collect and to dispose or recycle spilled or leaking fluids;
- Installation of low-level alarms or other equivalent protection devices on unattended hydraulic reservoirs over 150 gallons in capacity. Alternatively, provide secondary containment with sufficient volume to contain the entire volume of the reservoir.

The operator shall consider employing the following additional BMPs or equivalent measures: diversion structures such as dikes, berms, culverts, containment trenches, elevated concrete pads, grading to minimize contact of stormwater runoff with outdoor processing equipment; oil/water separators, sumps or equivalent, in processing areas that are potential sources of residual fluids and grease; permanent or semipermanent covers, or other similar measures; retention and detention basins or ponds, sediment traps or vegetated swales and strips, to facilitate settling or filtering out of pollutants in runoff from processing areas; or media filtration such as catch basin filters and sand filters.

g.) Scrap Lead-Acid Battery Program - The plan shall address measures and controls for the proper handling, storage and disposition of scrap lead-acid batteries (note. this permit does apply to the reclaiming of scrap lead-acid batteries, i.e., breaking up battery casings to recover lead). The operator shall consider including in the plan the following or equivalent measures:

- Segregating all scrap lead-acid batteries from other scrap materials;
- A description of procedures and/or measures for the handling, storage and proper disposal of cracked or broken batteries;
- A description of measures to collect and dispose of leaking battery fluid (lead-acid);
- A description of measures to minimize and, whenever possible, eliminate exposure of scrap lead-acid batteries to precipitation or runoff; and

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

- A description of employee training for the management of scrap batteries.

3.2.3.2 Erosion and Sediment Control - The plan shall identify all areas associated with industrial activity that have a high potential for soil erosion and suspended solids loadings, i.e., areas that tend to accumulate significant particulate matter. Appropriate source control, stabilization measures, nonstructural, structural controls or an equivalent shall be provided in these areas. The plan shall also contain a narrative discussion of the reason(s) for selected erosion and sediment controls. At a minimum, the operator shall consider in the plan, either individually or in combination, the following erosion and sediment control measures:

- Filtering or diversion practices, such as filter fabric fence, sediment filter boom, earthen or gravel berms, curbing or other equivalent measure,
 - Catch basin filters, filter fabric fence, or equivalent measure, place in or around inlets or catch basins that receive runoff from scrap and waste storage areas, and processing equipment; or
 - Sediment traps, vegetative buffer strips, or equivalent, to remove sediment prior to discharge through an inlet or catch basin.
- a.) Structural Controls for Sediment and Erosion Control - In instances where significant erosion and suspended solids loadings continue after installation of one or more of the BMPs, the operator shall consider providing in the plan for a detention or retention basin or other equivalent structural control. All structural controls shall be designed using good engineering practice. All structural controls and outlets that are likely to receive discharges containing oil and grease must include appropriate measures to minimize the discharge of oil and grease through the outlet. This may include the use of an absorbent boom or other equivalent measures.
- b.) Where space limitations (e.g., obstructions caused by permanent structures such as buildings and permanently-sited processing equipment and limitations caused by a restrictive property boundary) prevent the siting of a structural control, i.e., retention basin, such a determination will be noted in the plan. The operator will identify in the plan what existing practices shall be modified or additional measures shall be undertaken to minimize erosion and suspended sediment loadings in lieu of a structural BMP.

3.2.3.3 Spill Prevention and Response Procedures - To prevent or minimize stormwater contamination at loading and unloading areas, and from equipment or container failures, the operator shall consider including in the plan the following practices:

- Description of spill prevention and response measures to address areas that are potential sources of leaks or spills of fluids;
- Leaks and spills should be contained and cleaned up as soon as practicable. If malfunctioning equipment is responsible for the spill or leak, repairs should also be conducted as soon as practicable;

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

- Cleanup procedures should be identified in the plan, including the use of dry absorbent materials or other cleanup methods. Where dry absorbent cleanup methods are used, an adequate supply of dry absorbent material should be maintained onsite. Used absorbent material should be disposed of properly;
- Drums containing liquids, including oil and lubricants, should be stored indoors; or in a bermed area; or in overpack containers or spill pallets; or in similar containment devices;
- Overfill prevention devices should be installed on all fuel pumps or tanks;
- Drip pans or equivalent measures should be placed under any leaking piece of stationary equipment until the leak is repaired. The drip pans should be inspected for leaks and checked for potential overflow and emptied regularly to prevent overflow and all liquids will be disposed of in accordance with all requirements under RCRA.

An alarm and/or pump shut off system should be installed and maintained on all outside equipment with hydraulic reservoirs exceeding 150 gallons (only those reservoirs not directly visible by the operator of the equipment) in order to prevent draining the tank contents in the event of a line break. Alternatively, the equipment may have a secondary containment system capable of containing the contents of the hydraulic reservoir plus adequate freeboard for precipitation. Leaking hydraulic fluids should be disposed of in accordance with all requirements under RCRA.

Quarterly Inspection Program - A quarterly inspection shall include all designated areas of the facility and equipment identified in the plan. The inspection shall include a means of tracking and conducting follow up actions based on the results of the inspection. The inspections shall be conducted by members of the Stormwater Pollution Prevention team. At a minimum, quarterly inspections shall include the following areas: all outdoor scrap processing areas; all material unloading and loading areas (including rail sidings) that are exposed to either precipitation or stormwater runoff; areas where structural BMPs have been installed; all erosion and sediment BMPs; outdoor vehicle and equipment maintenance areas; vehicle and equipment fueling areas; and all areas where waste is generated, received, stored, treated, or disposed and which are exposed to either precipitation or stormwater runoff.

The objective of the inspection shall be identify any corroded or leaking containers, corroded or leaking pipes, leaking or improperly closed valves and valve fittings, leaking pumps and/or hose connections, and deterioration in diversionary or containment structures that are exposed to precipitation or stormwater runoff.

Spills or leaks identified shall be immediately addressed using the procedures identified in Spill Prevention and Response Procedures. Structural BMPs shall be visually inspected for signs of washout, breakage, deterioration, damage, or overflowing and breaks shall be repaired or replaced as expeditiously as possible.

Employee Training - At a minimum, stormwater control training appropriate to their job function shall be provided for truck drivers, scale operators, supervisors, buyers and other operating personnel. The plan shall include a proposed schedule for the training. The employee

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

training program shall address at a minimum: BMPs and other requirements of the plan; proper scrap inspection, handling and storage procedures; procedures to follow in the event of a spill, leak, or break in any structural BMP. A training and education program shall be developed for employees and for suppliers for implementing appropriate activities identified in the stormwater pollution prevention plan.

Supplier Notification - The plan shall include a supplier notification program that will be applicable to major suppliers and shall include: description of scrap materials that will not be accepted at the facility or that are accepted only under certain conditions.

3.2.3 Recycling Facilities for liquid only recyclable waste - The following special conditions have been established for the pollution prevention plan for recycling facilities, including MRFs (material recovery facilities), that receive only source-separated recyclable materials primarily from non-industrial and residential sources.

Inbound Recyclable Material Control Program. The plan shall include a recyclable material inspection program to minimize the likelihood of receiving non-recyclable materials (e.g., hazardous materials) that may be a significant source of pollutants in surface runoff. At a minimum, the operator shall consider addressing in the plan the following:

- A description of information and education measures to educate the appropriate suppliers of recyclable materials on the types of recyclable materials that are acceptable and those that are not acceptable, e.g., household hazardous wastes;
- A description of training requirements for drivers responsible for pickup of recyclable materials;
- Clearly mark public drop-off containers as to what materials can be accepted;
- Rejecting non-recyclable wastes or household hazardous wastes at the source; and
- A description of procedures for the handling and disposal of non-recyclable materials.

Outdoor Storage. The plan shall include BMPs to minimize or reduce the exposure of recyclable materials to surface runoff and precipitation. The plan, at a minimum, shall include good housekeeping measures to prevent the accumulation of visible quantities of residual particulate matter and fluids, particularly in high traffic areas. The plan shall consider tarpaulins or their equivalent to be used to cover exposed bales of recyclable waste paper. The operator shall consider within the plan the use of the following types of BMPs (individually or in combination) or their equivalent, where practicable:

- Provide totally-enclosed drop-off containers for public.
- Provide a sump and sump pump with each containment pit. Discharge collected fluids to sanitary sewer system. Prevent discharging to the storm sewer system;
- Provide dikes and curbs for secondary containment, i.e., around bales of recyclable waste paper;

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

- Divert surface runoff away from outside material storage areas; and/or
- Provide covers over containment bins, dumpsters, roll-off boxes; and,
- Store the equivalent one day's volume of recyclable materials indoors.

3.2.3.8 Indoor Storage and Material Processing. The plan shall address BMPs to minimize the release of pollutants from indoor storage and processing areas to the storm sewer system. The plan shall establish specific measures to ensure that all floor drains do not discharge to the storm sewer system. The following BMPs shall be considered for inclusion in the plan:

- Schedule routine good housekeeping measures for all storage and processing areas;
- Prohibit a practice of allowing tipping floor washwaters from draining to any portion of the storm sewer system;
- Provide employee training on pollution prevention practices.

3.2.3.9 Vehicle and Equipment Maintenance. The plan shall also provide for BMPs in those areas where vehicle and equipment maintenance is occurring outdoors. At a minimum, the following BMPs or equivalent measures shall be considered for inclusion in the plan:

- Prohibit vehicle and equipment wash water from discharging to the storm sewer system;
- Minimize or eliminate outdoor maintenance areas, wherever possible;
- Establish spill prevention and clean-up procedures in fueling areas;
- Provide employee training on avoiding topping off fuel tanks;
- Divert runoff from fueling areas;
- Store lubricants and hydraulic fluids indoors;
- Provide employee training on proper, handling, storage of hydraulic fluids and lubricants.

3.2.3.10 Recordkeeping and Internal Reporting Procedures - The following record and internal reporting procedures are applicable to all discharges seeking coverage under this permit. The plan shall include a description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan. The plan must address spills, monitoring, and BMP inspection and maintenance activities. BMPs which are ineffective must be reported and the date of their corrective action noted. Employees must report incidents of leaking fluids to facility management and these reports must be incorporated into the plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

3.2.3.11 Non-stormwater Discharges

The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).

Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not permitted under an individual NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.

3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:

3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph XI.N.3.a.(2) of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph XI.N.3.a.(3) of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with paragraph N.3.a. (4)(b) (above) of the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.3 The stormwater pollution prevention plan must describe the scope and content of comprehensive site evaluations that qualified personnel shall conduct to 1) confirm the accuracy of the description of potential pollution sources contained in the plan, 2) determine the effectiveness of the plan, and 3) assess compliance with the terms and conditions of the permit. The individual or individuals who shall conduct the evaluation must be identified in the plan and should be members of the pollution prevention team.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table N-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table N-1. Benchmark Monitoring Requirements for Scrap Recycling and Waste Recycling Facilities (SIC 5093)

Pollutants of Concern	Benchmark [mg/L]
Chemical Oxygen Demand (COD)	120
Total Suspended Solids (TSS)	150
PCBs, total ¹	Report
Total Recoverable Aluminum	0.75
Total Recoverable Copper	0.018
Total Recoverable Iron	5
Total Recoverable Lead	0.156
Total Recoverable Zinc	0.395

1) Several congeners of PCBs (PCB-1016, -1221, -1242, -1248, -1260) were above established benchmarks; however, EPA believes that these constituents will readily bound up with sediment and particulate matter. Therefore, EPA believes that BMPs will effectively address sources of PCBs and that monitoring for TSS will serve as an adequate indicator of the control of PCBs. However, if concentration of TSS exceeds the benchmark of 150 mg/L, PCB sampling must be conducted within 30 days of receiving the TSS sampling results. PCB monitoring applies only to scrap and waste metal recycling facilities (not paper, newspaper, glass, cardboard, plastic containers, aluminum and tin cans recycling, or at facilities engaged in dismantling or wrecking used motor vehicles for parts recycling or resale).

5.1.1 Monitoring Periods. Scrap recycling and waste recycling facilities (non-source separated only) shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or non-process water, then where practicable, permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

- 5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (e.g., drought, extended frozen conditions, etc.).
- 5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in the area of the facility which drains to the outfall for which sampling was waived.
- 5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of the monitoring reports required under paragraph b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity, that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph b. below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

- 5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a representative stormwater discharge associated with industrial activity exposed to stormwater. The examination must be made at least once each quarter during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event. Examinations must be conducted at least once in each of the following periods: January through March; April through June; July through September; and October through December.
- 5.3.1 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3.2 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.3 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.4 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain the documentation on-site with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.5 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector N

as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

Sector O - Stormwater Discharges Associated With Industrial Activity From Steam Electric Power Generating Facilities, Including Coal Handling Areas

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges from steam electric power generating facilities, including coal handling areas. Non-stormwater discharges subject to effluent limitations guidelines are not covered by this permit. Storm water discharges from coal pile runoff subject to numeric limitations are eligible for coverage under this permit, but are subject to the limitations established by 40 CFR 423.

SIC Code	Sector O: Steam Electric Power Generating Facilities	Sampling Required?	Table Number
4911	Electric Services	Yes	O-1& 2

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

Limitations on Coverage. Storm water discharges from ancillary facilities such as fleet centers, gas turbine stations, and substations that are not contiguous to a steam electric power generating facility are not covered by this permit. Heat capture co-generation facilities are not covered by this permit; however, dual fuel co-generation facilities are included.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map which clearly outlines the locations of the following, as they apply to the facility: The outfall locations and the types of discharges contained in the drainage areas of the outfalls, and an outline of the drainage area of each stormwater outfall that is within the facility boundaries (and indicating the direction of stormwater flow); processing areas and buildings; treatment ponds; locations where significant materials are exposed to precipitation; storage tanks; scrap yards, and general refuse areas; fuel storage and distribution areas; vehicle and equipment maintenance and storage areas; loading/unloading areas; locations used for treatment, storage or disposal of wastes; location of short and long term storage of general materials (including but not limited to: supplies, construction materials, plant equipment, oils, fuels, used and unused solvents, cleaning materials, paint, water treatment chemicals, fertilizers, and pesticides); landfills; location of construction sites; locations of stock pile areas (such as coal piles and limestone piles); locations where major spills or leaks identified under Spills and Leaks subpart of this permit have occurred; surface water bodies; and existing structural control measures to reduce pollutants in stormwater runoff (such as bermed areas, grassy swales, etc.).

For each stormwater outfall identify the types of pollutants which are likely to be present in the stormwater discharges. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., total suspended solids, copper, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner. The following areas must be specifically addressed:
- 3.2.3.1.1 Fugitive Dust Emissions - The plan must describe measures that prevent or minimize fugitive dust emissions from coal handling areas. The permittee shall consider establishing procedures to minimize offsite tracking of coal dust. To prevent offsite tracking the facility may consider specially designed tires, or washing vehicles in a designated area before they leave the site, and controlling the wash water.
- 3.2.3.1.2 Delivery Vehicles - The plan must describe measures that prevent or minimize contamination of stormwater runoff from delivery vehicles arriving on the plant site. At a minimum the permittee should consider the following:
- Develop procedures for the inspection of delivery vehicles arriving on the plant site, and ensure overall integrity of the body or container; and
 - Develop procedures to deal with leakage or spillage from vehicles or containers, and ensure that proper protective measures are available for personnel and environment.
 - Fuel Oil Unloading Areas - The plan must describe measures that prevent or minimize contamination of stormwater runoff from fuel oil unloading areas. At a minimum the facility operator must consider using the following measures, or an equivalent:
 - Use containment curbs in unloading areas;
 - During deliveries station personnel familiar with spill prevention and response procedures must be present to ensure that any leaks or spills are immediately contained and cleaned up; and
 - Use spill and overflow protection (drip pans, drip diapers, and/or other containment devices shall be placed beneath fuel oil connectors to contain any spillage that may occur during deliveries or due to leaks at such connectors).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

- 3.2.3.1.3 Chemical Loading/Unloading Areas - The plan must describe measures that prevent or minimize the contamination of stormwater runoff from chemical loading/unloading areas. The areas surrounding storm drain inlets and outfall points should also be free of material that could discharge off-site and contribute to pollutants in stormwater. Where practicable, chemical loading/unloading areas should be covered, and chemicals should be stored indoors.

At a minimum the permittee must consider using the following measures or an equivalent:

- Use containment curbs at chemical loading/unloading areas to contain spills; and
- During deliveries station personnel familiar with spill prevention and response procedures must be present to ensure that any leaks or spills are immediately contained and cleaned up.

- 3.2.3.1.4 Miscellaneous Loading/Unloading Areas - The plan must describe measures that prevent or minimizes the contamination of stormwater runoff from loading and unloading areas. The facility may consider covering the loading area, minimizing stormwater run-on to the loading area by grading, berming, or curbing the area around the loading area to direct stormwater away from the area, or locate the loading/unloading equipment and vehicles so that leaks can be contained in existing containment and flow diversion systems.

- 3.2.3.1.5 Liquid Storage Tanks - The plan must describe measures that prevent or minimize contamination of stormwater runoff from above ground liquid storage tanks. At a minimum the facility operator must consider employing the following measures or an equivalent:

- Use protective guards around tanks;
- Use containment curbs;
- Use spill and overflow protection (drip pans, drip diapers, and/or other containment devices shall be placed beneath chemical connectors to contain any spillage that may occur during deliveries or due to leaks at such connectors); and
- Use dry cleanup methods.
- Large Bulk Fuel Storage Tanks - The plan must describe measures that prevent or minimize contamination of stormwater runoff from liquid storage tanks. At a minimum the facility operator must consider employing the following measures, or an equivalent:
 - Comply with applicable State and Federal laws, including Spill Prevention Control and Countermeasures (SPCC); and
 - Containment berms.

- 3.2.3.1.6 The plan must describe measures to reduce the potential for an oil spill, or a chemical spill, or reference the appropriate section of their SPCC plan. At a minimum the structural integrity of all above ground tanks, pipelines, pumps and other related equipment shall be visually inspected on a weekly basis. All repairs deemed necessary based on the findings of the inspections shall be completed immediately to reduce the incidence of spills and leaks occurring from such faulty equipment.

- 3.2.3.1.7 Oil Bearing Equipment in Switchyards - The plan must describe measures to reduce the potential for stormwater contamination from oil bearing equipment in switchyard areas. The

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

facility operator may consider level grades and gravel surfaces to retard flows and limit the spread of spills; collection of stormwater runoff in perimeter ditches.

- 3.2.3.1.8 Residue Hauling Vehicles - All residue hauling vehicles shall be inspected for proper covering over the load, adequate gate sealing and overall integrity of the body or container. Vehicles without load coverings or adequate gate sealing, or with leaking containers or beds must be repaired as soon as practicable.
- 3.2.3.1.9 Ash Loading Areas - Plant procedures shall be established to reduce and/or control the tracking of ash or residue from ash loading areas including, where practicable, requirements to clear the ash building floor and immediately adjacent roadways of spillage, debris and excess water before each loaded vehicle departs.
- 3.2.3.1.10 Areas Adjacent to Disposal Ponds or Landfills - The plan must describe measures that prevent or minimize contamination of stormwater runoff from areas adjacent to disposal ponds or landfills. The facility must develop procedures to:
- Reduce ash residue which may be tracked on to access roads traveled by residue trucks or residue handling vehicles; and
 - Reduce ash residue on exit roads leading into and out of residue handling areas.
- 3.2.3.1.11 Landfills, Scrapyards, Surface Impoundments, Open Dumps, General Refuse Sites - The plan must address landfills, scrapyards, surface impoundments, open dumps and general refuse sites. The permittee is referred to Parts 11.L. and 11.N of the permit for applicable Best Management Practices (BMPs).
- 3.2.3.1.12 Maintenance Activities - For vehicle maintenance activities performed on the plant site, the permittee shall use the applicable BMPs outlined in Part 11.P. of the permit (Stormwater Discharges Associated With Industrial Activity From Motor Freight Transportation Facilities, Passenger Transportation Facilities, Rail Transportation Facilities, and United States Postal Service Transportation Facilities).
- 3.2.3.1.13 Material Storage Areas - The plan must describe measures that prevent or minimize contamination of stormwater from material storage areas (including areas used for temporary storage of miscellaneous products, and construction materials stored in lay down areas). The facility operator may consider flat yard grades, runoff collection in graded swales or ditches, erosion protection measures at steep outfall sites (e.g., concrete chutes, riprap, stilling basins), covering lay down areas, storing the materials indoors, covering the material with a temporary covering made of polyethylene, polyurethane, polypropylene, or hypalon. Storm water run-on may be minimized by constructing an enclosure or building a berm around the area.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall be implemented and shall include timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points, shall be identified clearly in the stormwater pollution prevention plan. The plan should be consider specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

3.2.3.4 Inspections - In addition to or as part of the comprehensive site evaluation required under this section, qualified facility personnel shall be identified to inspect the following areas on a monthly basis: coal handling areas, loading/unloading areas, switchyards, fueling areas, bulk storage areas, ash handling areas, areas adjacent to disposal ponds and landfills, maintenance areas, liquid storage tanks, and long term and short term material storage areas. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained onsite. Such records are subject to review by the U.S. Environmental Protection Agency, and State, and local agencies with jurisdiction, and must be retained onsite a minimum of 3 years after the date of the inspection.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as goals of the pollution prevention plan, spill prevention and control, proper handling procedures for hazardous wastes, good housekeeping and material management practices, and stormwater sampling techniques. The pollution prevention plan shall identify periodic dates for such training, but in all cases training must be held at least annually.

3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

3.2.3.7 Non-stormwater Discharges

3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall,

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).

- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and, why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, wet detention/retention devices, or other equivalent measures.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual evaluation of equipment needed to implement the plan, such as spill response equipment, shall be made.

- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with section-Description of Potential Pollutant Sources and pollution prevention measures and controls identified in the plan in section-Measures and Controls shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.O.3.2.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

Coal pile runoff is subject to the effluent guidelines described in subpart 5.2 (Coal Pile Runoff) of this permit. The following pollutants of concern shall be monitored at least annually.

Table O-1 Numeric Effluent Limits for Stormwater Discharges from Coal Pile

Pollutant of Concern	Effluent limit
Total Suspended Solids (TSS)	50 mg/L
pH	Between 6.0 and 9.0 S.U.

However, steam electric generating facilities must comply with the requirement of subpart 5.2 (Coal Pile Runoff) immediately upon permit issuance.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2(reporting). In addition to the parameter listed in Table O-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event which generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table O-2. Benchmark Monitoring Requirements for Steam Electric Power Generating Facilities

Pollutant of Concern	Benchmark [mg/L]
Total Recoverable Iron	5

5.1.1 Monitoring Periods. Steam electric power generating facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

- 5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark); a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility which drains to the outfall for which sampling was waived.
- 5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.
- 5.1.4 Representative Discharge. When a facility has 2 or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfalls provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explaining in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area (e.g., low (under 40 percent), medium (40 to 65 percent) or high (above 65 percent)) shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.
- 5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall, or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with Part 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

5.3 Compliance Monitoring Requirements. Permittees with point sources of coal pile runoff associated with steam electric power generation must monitor these stormwater discharges for the presence of TSS and for pH at least annually (one time per year). Facilities must report in accordance with 5.3.(2) (reporting). In addition to the parameters listed above, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

5.3.1 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable.

5.3.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

- 5.4 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.
- 5.4.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snow melt: January through March; April through June; July through September; and October through December.
- 5.4.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed one hour) of when the runoff or snowmelt begins discharging. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable the same individual should carry out the collection and examination of discharges for entire permit term.
- 5.4.3 Visual examination reports must be maintained on-site in the pollution prevention plan. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution, and probable sources of any observed stormwater contamination.
- 5.4.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfalls provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explaining in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area (e.g., low (under 40 percent), medium (40 to 65 percent) or high (above 65 percent)) shall be provided in the plan.
- 5.4.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation with the records of the visual examination. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector O

- 5.4.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector P

Sector P - Stormwater Discharges Associated With Industrial Activity From Motor Freight Transportation Facilities, Passenger Transportation Facilities, Petroleum Bulk Oil Stations and Terminals, Rail Transportation Facilities, and United States Postal Service Transportation Facilities

1. Discharges Covered Under This Section

Storm water discharges from ground transportation facilities and rail transportation facilities that have vehicle and equipment maintenance shops (vehicle and equipment rehabilitation, mechanical repairs, painting, fueling and lubrication) and/or equipment cleaning operations are eligible for coverage under this section:

SIC Code	Sector P: Vehicle Maintenance or Equipment Cleaning areas at Motor Freight Transportation Facilities, Passenger Transportation Facilities, Petroleum Bulk Oil Stations and Terminals, the United States Postal Service, or Railroad Transportation Facilities	Sampling Required?	Table Number
4011	Railroads, Line-haul Operating	No	--
4013	Railroad Switching and Terminal Establishments	No	--
4111	Local and Suburban Transit	No	--
4119	Local Passenger Transportation, NEC	No	--
4121	Taxicabs	No	--
4131	Intercity and Rural Bus Transportation	No	--
4141	Local Bus Charter Service	No	--
4142	Bus Charter Service, Except Local	No	--
4151	School Buses	No	--
4173	Terminal and Service Facilities for Motor Vehicle Passenger Transportation	No	--
4212	Local Trucking Without Storage	No	--
4213	Trucking, Except Local	No	--
4214	Local Trucking with Storage	No	--
4215	Couriers Services Except by Air	No	--
4221	Farm Product Warehousing and Storage	No	--
4222	Refrigerated Warehousing and Storage	No	--
4225	General Warehousing and Storage	No	--
4226	Special Warehousing and Storage, NEC	No	--
4231	Terminal and Joint Terminal Maintenance Facilities for Motor Freight Transportation	No	--
4311	United States Postal Service	No	--
5171	Petroleum Bulk Stations and Terminals	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector P

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of the Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of stormwater Pollution Prevention Team who are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage - A site map indicating the location of each point of discharge of stormwater associated with industrial activity, an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries (with a prediction of the direction of flow), each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.P.3.2.2.3 (Spills and Leaks) of this permit have occurred, and the locations of the following activities: fueling stations, vehicle and equipment maintenance and/or cleaning areas, storage areas for vehicles and equipment with actual or potential fluid leaks loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas, storage areas, and all monitoring locations. The site map must also indicate the types of discharges contained in the drainage areas of the outfalls (e.g., stormwater and air conditioner condensate). In order to increase the readability of the map, the inventory of the types of discharges contained in each outfall may be kept as an attachment to the site map.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; dirt or gravel parking areas for storage of vehicles to be maintained;

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector P

materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities associated with vehicle and equipment maintenance and equipment cleaning: fueling stations; maintenance shops; equipment or vehicle cleaning areas; paved dirt or gravel parking areas for vehicles to be maintained; loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., oil and grease, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
 - 3.2.3.1 Good Housekeeping - All areas that may contribute pollutants to stormwater discharges shall be maintained in a clean, orderly manner. The following areas must be specifically addressed:
 - 3.2.3.1.1 Vehicle and Equipment Storage Areas - The storage of vehicles and equipment awaiting maintenance with actual or potential fluid leaks must be confined to designated areas (delineated on the site map). The plan must describe measures that prevent or minimize contamination of the stormwater runoff from these areas. The facility shall consider the use of drip pans under vehicles and equipment, indoor storage of the vehicles and equipment, installation of berming and diking of this area, use of absorbents, roofing or covering storage areas, cleaning pavement surface to remove oil and grease, or other equivalent methods.
 - 3.2.3.1.2 Fueling Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from fueling areas. The facility shall consider covering the fueling area, using spill and overflow protection and cleanup equipment, minimizing run-on/runoff of stormwater to the fueling area, using dry cleanup methods, collecting the stormwater runoff and providing treatment or recycling, or other equivalent measures.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector P

- 3.2.3.1.3 **Material Storage Areas** - Storage units of all materials (e.g., used oil, used oil filters, spent solvents, paint wastes, radiator fluids, transmission fluids, hydraulic fluids) must be maintained in good condition, so as to prevent contamination of stormwater, and plainly labeled (e.g., "used oil," "spent solvents," etc.). The plan must describe measures that prevent or minimize contamination of the stormwater runoff from such storage areas. The facility shall consider indoor storage of the materials, installation of berming and diking of the area, minimizing run-on/runoff of stormwater to the areas, using dry cleanup methods, collecting the stormwater runoff and providing treatment, or other equivalent methods.
- 3.2.3.1.4 **Vehicle and Equipment Cleaning Areas** - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from all areas used for vehicle and equipment cleaning. The facility shall consider performing all cleaning operations indoors, covering the cleaning operation, ensuring that all washwaters drain to the intended collection system (i.e., not the stormwater drainage system unless NPDES permitted), collecting the stormwater runoff from the cleaning area and providing treatment or recycling, or other equivalent measures. The discharge of vehicle and equipment wash waters, including tank cleaning operations, are not authorized by this permit and must be covered under a separate NPDES permit or discharged to a sanitary sewer in accordance with applicable industrial pretreatment requirements.
- 3.2.3.1.5 **Vehicle and Equipment Maintenance Areas** - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from all areas used for vehicle and equipment maintenance. The facility shall consider performing all maintenance activities indoors, using drip pans, maintaining an organized inventory of materials used in the shop, draining all parts of fluids prior to disposal, prohibiting wet clean-up practices where the practices would result in the discharge of pollutants to stormwater drainage systems, using dry cleanup methods, collecting the stormwater runoff from the maintenance area and providing treatment or recycling, minimizing run-on/runoff of stormwater areas or other equivalent measures.
- 3.2.3.1.6 **Locomotive Sanding (loading sand for traction) Areas** - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from areas used for locomotive sanding. The facility shall consider covering sanding areas, minimizing stormwater run-on/runoff, appropriate sediment removal practices to minimize the offsite transport of sanding material by stormwater, or other equivalent measures.
- 3.2.3.2 **Preventive Maintenance** - A preventive maintenance program shall include timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins, drip pans, vehicle-mounted drip containment devices) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 **Spill Prevention and Response Procedures** - Areas where potential spills could contribute pollutants to stormwater discharges, and their accompanying drainage points, shall be identified clearly in the stormwater pollution prevention plan. The plan should consider specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures and equipment for cleaning up spills shall be identified in the plan and made available to the appropriate personnel.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector P

- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility on a quarterly basis. The following areas shall be included in all inspections: storage area for vehicles and equipment awaiting maintenance, fueling areas, vehicle and equipment maintenance areas (both indoors and outdoors), material storage areas, vehicle and equipment cleaning areas, and loading and unloading areas. Follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained. The use of a checklist should be considered by the facility.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify how often training will take place; at a minimum, training must be held annually (once per calendar year). Employee training must, at a minimum, address the following areas when applicable to a facility: summary of the facility's pollution prevention plan requirements; used oil management; spent solvent management; spill prevention, response and control; fueling procedures; general good housekeeping practices; proper painting procedures; and used battery management.

- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

- 3.2.3.7 Non-stormwater Discharges

- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit. Such certification may not be practical if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not practical, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with Part 11.P.3.2.3.7.4 (Failure to Certify) of this permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector P

- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 A copy of the NPDES permit issued for vehicle and equipment washwaters or, if an NPDES permit has not yet been issued, a copy of the pending application must be attached to or referenced in the plan. For facilities that discharge vehicle and equipment washwaters to the sanitary sewer system, the operator of the sanitary system and associated treatment plant must be notified. In such cases, a copy of the notification letter must be attached to the plan. If an industrial user permit is issued under a pretreatment program, a copy of that permit must be attached in the plan. In all cases, any permit conditions or pretreatment requirements must be considered in the plan. Washwaters handling must be described in the plan including disposal method (e.g. hauled offsite) and all pertinent documentation (e.g., frequency, volume, destination, etc.).
- 3.2.3.7.4 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.5 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.6 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide for the implementation and maintenance of measures that the permittee determines to be reasonable and appropriate. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see 11.P.3.2.2 (description of potential pollutant sources) of this permit] shall be considered when determining reasonable and appropriate measures. Appropriate measures or other equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector P

- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct comprehensive site compliance evaluations at appropriate intervals specified in the SWPPP, but, in no case less than once a year. Such evaluations shall provide:
- 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with Part 11.P.3.2.2 (Description of Potential Pollutant Sources) of this permit and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.P.3.2.3 (Measures and Controls) of this permit shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with paragraph 11.P.3.2.3.2 (above) of the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector P

- 5.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
- 5.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for Each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector P

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

Sector Q - Stormwater Discharges Associated With Industrial Activity From Water Transportation Facilities That Have Vehicle Maintenance Shops and/or Equipment Cleaning Operations

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges from water transportation facilities that have vehicle (vessel) maintenance shops and/or equipment cleaning operations, generally described by the SIC codes shown below:

SIC Code	Sector Q: Vehicle Maintenance Areas and Equipment Cleaning Areas of Water Transportation Facilities	Sampling Required?	Table Number
4412	Deep Sea Foreign Transportation of Freight	Yes	Q-1
4424	Deep Sea Domestic Transportation of Freight	Yes	Q-1
4432	Freight Transportation on the Great Lakes - St. Lawrence Seaway	Yes	Q-1
4449	Water Transportation of Freight, NEC	Yes	Q-1
4481	Deep Sea Transportation of Passengers, Except by Ferry	Yes	Q-1
4482	Ferries	Yes	Q-1
4489	Water Transportation of Passengers, NEC	Yes	Q-1
4491	Marine Cargo Handling	Yes	Q-1
4492	Towing and Tugboat Services	Yes	Q-1
4493	Marinas	Yes	Q-1
4499	Water Transportation Services, NEC	Yes	Q-1

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector. This section specifically prohibits non-stormwater discharges of wastewaters, such as bilge and ballast water, sanitary wastes, pressure wash water, and cooling water originating from vessels.

3. Stormwater Pollution Prevention Plan Requirements

- 3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

- 3.2 Contents of Plan. The plan shall include, at a minimum, the following items:
- 3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team who are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.
- 3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:
- 3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.Q.32.2.3 (Spills and Leaks) of this section have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling, engine maintenance and repair, vessel maintenance and repair, pressure washing, painting, sanding, blasting, welding, metal fabrication, loading/unloading areas, locations used for the treatment, storage or disposal of wastes; liquid storage tanks, liquid storage areas (i.e., paint, solvents, resins), and material storage areas (i.e., blasting media, aluminum, steel, scrap iron). In addition, the map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities if applicable: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities (i.e., welding, metal fabricating); significant dust or particulate generating processes (i.e., abrasive blasting, sanding, painting); loading/unloading areas; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
 - 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner. The following areas must be specifically addressed, when applicable at a facility:
 - 3.2.3.1.1 Pressure Washing Area - When pressure washing is used to remove marine growth from vessels, the discharge water must be permitted by an NPDES permit. The pollution prevention plan must describe the measures to collect or contain the discharge from the pressure washing area, detail the method for the removal of the visible solids, describe the method of disposal of the collected solids, and identify where the discharge will be released (i.e., the receiving waterbody, storm sewer system, sanitary sewer system).
 - 3.2.3.1.2 Blasting and Painting Areas - The facility must consider containing all blasting and painting activities to prevent abrasives, paint chips, and overspray from reaching the receiving water or the storm sewer system. The plan must describe measures taken at the facility to prevent or minimize the discharge of spent abrasive, paint chips, and paint into the receiving waterbody and storm sewer system. The facility may consider hanging plastic barriers or tarpaulins during blasting or painting operations to contain debris. Where required, a schedule for cleaning stormwater conveyances to remove deposits of abrasive blasting debris and paint chips should be addressed within the plan. The plan should include any standard operating practices with regard to blasting and painting activities. Such included items may be the prohibition of performing uncontained blasting and painting over open

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

water or blasting and painting during windy conditions which can render containment ineffective.

- 3.2.3.1.3 Material Storage Areas - All stored and containerized materials (fuels, paints, solvents, waste oil, antifreeze, batteries) must be stored in a protected, secure location away from drains and plainly labeled. The plan must describe measures that prevent or minimize contamination of the stormwater runoff from such storage areas. The facility must specify which materials are stored indoors and consider containment or enclosure for materials that are stored outdoors. Above ground storage tanks, drums, and barrels permanently stored outside must be delineated on the site map with a description of the containment measures in place to prevent leaks and spills. The facility must consider implementing an inventory control plan to prevent excessive purchasing, storage, and handling of potentially hazardous materials. Those facilities where abrasive blasting is performed must specifically include a discussion on the storage and disposal of spent abrasive materials generated at the facility.
- 3.2.3.1.4 Engine Maintenance and Repair Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from all areas used for engine maintenance and repair. The facility may consider performing all maintenance activities indoors, maintaining an organized inventory of materials used in the shop, draining all parts of fluids prior to disposal, prohibiting the practice of hosing down the shop floor, using dry cleanup methods, and/or collecting the stormwater runoff from the maintenance area and providing treatment or recycling.
- 3.2.3.1.5 Material Handling Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from material handling operations and areas (i.e., fueling, paint and solvent mixing, disposal of process wastewater streams from vessels). The facility may consider covering fueling areas; using spill and overflow protection; mixing paints and solvents in a designated area, preferably indoors or under a shed; and minimizing run-on of stormwater to material handling areas or other equivalent measures. Where applicable, the plan must address the replacement or repair of leaking connections, valves, pipes, hoses, and soil chutes carrying wastewater from vessels.
- 3.2.3.1.6 Drydock Activities - The plan must address the routine maintenance and cleaning of the drydock to minimize the potential for pollutants in the stormwater runoff. The plan must describe the procedures for cleaning the accessible areas of the drydock prior to flooding and final cleanup after the vessel is removed and the dock is raised. Cleanup procedures for oil, grease, or fuel spills occurring on the drydock must also be included within the plan. The facility should consider items such as sweeping rather than hosing off debris and spent blasting material from the accessible areas of the drydock prior to flooding and having absorbent materials and oil containment booms readily available to contain and cleanup any spills or other equivalent measures.
- 3.2.3.1.7 General Yard Area - The plan must include a schedule for routine yard maintenance and cleanup. Scrap metal, wood, plastic, miscellaneous trash, paper, glass, industrial scrap, insulation, welding rods, packaging, etc., must be routinely removed from the general yard area. The facility may consider such measures as providing covered trash receptacles in each yard, on each pier, and on board each vessel being repaired.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, sediment traps to ensure that spent abrasives, paint chips, and solids will be intercepted and retained prior to entering the storm drainage system) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility on a monthly basis. The following areas shall be included in all inspections: pressure washing area; blasting, sanding, and painting areas; material storage areas; engine maintenance and repair areas; material handling areas; drydock area; and general yard area. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.
- Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.
- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify how often training will take place, but in all cases training must be held at least annually (once per calendar year). Employee training must, at a minimum, address the following areas when applicable to a facility: used oil management; spent solvent management; proper disposal of spent abrasives; proper disposal of vessel wastewaters, spill prevention and control; fueling procedures; general good housekeeping practices; proper painting and blasting procedures; and used battery management. Employees, independent contractors, and customers must be informed about BMPs and be required to perform in accordance with these practices. The facility must consider posting instructions, easy to read descriptions or graphic depictions of BMPs, spill control/clean-up equipment and emergency phone numbers in the work areas.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

3.2.3.7 Non-stormwater Discharges

- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).
- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

with industrial activity [see the section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures or equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.

- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:
- 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity (pressure washing area, blasting and sanding areas, painting areas, material storage areas, engine maintenance and repair areas, material handling areas, and drydock area) shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with paragraph 11.Q.3.2.4 (above) of the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the inspection. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 3.2.3.4 the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table Q-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table Q-1. Benchmark Monitoring Requirements

Pollutants of Concern	Benchmark {mg/L}
Total Recoverable Aluminum	0.75
Total Recoverable Iron	5
Total Recoverable Lead	0.156
Total Recoverable Zinc	0.395

5.1.1 Monitoring Periods. Water transportation facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or non-process water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark), a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility which drains to the outfall for which sampling was waived.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

- 5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.
- 5.1.4 **Representative Discharge.** When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.
- 5.1.5 **Alternative Certification.** A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.
- 5.2 **Reporting**
- Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

- 5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.
 - 5.3.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
 - 5.3.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for entire permit term.
 - 5.3.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
 - 5.3.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
 - 5.3.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examination. Adverse weather conditions which may prohibit the collection of

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Q

samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

- 5.3.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector R

Sector R - Stormwater Discharges Associated With Industrial Activity From Ship and Boat Building or Repairing Yards

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector R: Ship or Boat Building and Repair Yards	Sampling Required?	Table Number
3731	Ship Building and Repairing	No	--
3732	Boat Building and Repairing	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. In addition to the prohibitions listed in Part 3.1 of the permit, this section specifically prohibits non-stormwater discharges of wastewaters, such as bilge and ballast water, pressure wash water, sanitary wastes, and cooling water originating from vessels, are not authorized by this permit. The operators of such discharges must obtain coverage under a separate NPDES permit if discharged to waters of the state or through a municipal separate storm sewer system.

3. Stormwater Pollution Prevention Plan Requirements

- 3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.
- 3.2 Contents of Plan. The plan shall include, at a minimum, the following items:
- 3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector R

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating the location of the outfalls and the types of discharges contained in the drainage areas of the outfalls, an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.R.3.2.2.3 (Spills and Leaks) of this section have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling, engine maintenance and repair, vessel maintenance and repair, pressure washing, painting, sanding, blasting, welding, metal fabrication, loading/unloading areas, locations used for the treatment, storage or disposal of wastes; liquid storage tanks, liquid storage areas (i.e., paint, solvents, resins), and material storage areas (i.e., blasting media, aluminum, steel, scrap iron).

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector R

- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities if applicable: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities (i.e., welding, metal fabricating); significant dust or particulate generating processes (i.e., abrasive blasting, sanding, painting); loading/unloading areas; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner. The following areas must be specifically addressed, when applicable at a facility:
- 3.2.3.1.1 Pressure Washing Area - When pressure washing is used to remove marine growth from vessels, the discharge water must be permitted as a process wastewater by an NPDES permit.
- 3.2.3.1.2 Blasting and Painting Areas - The facility must consider containing all blasting and painting activities to prevent abrasives, paint chips, and overspray from reaching the receiving water or the storm sewer system. The plan must describe measures taken at the facility to prevent or minimize the discharge of spent abrasive, paint chips, and paint into the receiving waterbody and storm sewer system. The facility may consider hanging plastic barriers or tarpaulins during blasting or painting operations to contain debris. Where required, a schedule for cleaning storm systems to remove deposits of abrasive blasting debris and paint chips should be addressed within the plan. The plan should include any standard operating practices with regard to blasting and painting activities. Practices may include the prohibition of performing uncontained blasting and painting over open water or blasting and painting during windy conditions which can render containment ineffective.
- 3.2.3.1.3 Material Storage Areas - All stored and containerized materials (fuels, paints, solvents, waste oil, antifreeze, batteries) must be stored in a protected, secure location away from drains and plainly labeled. The plan must describe measures that prevent or minimize contamination of the stormwater runoff from such storage areas. The facility must specify which materials are stored indoors and consider containment or enclosure for materials that are stored outdoors. Above ground storage tanks, drums, and barrels permanently stored outside must be delineated on the site map with a description of the containment measures in place to prevent leaks and spills. The facility must consider implementing an inventory control plan to prevent excessive purchasing, storage, and handling of potentially hazardous materials. Those

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector R

facilities where abrasive blasting is performed must specifically include a discussion on the storage and disposal of spent abrasive materials generated at the facility.

- 3.2.3.1.4 Engine Maintenance and Repair Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from all areas used for engine maintenance and repair. The facility must consider performing all maintenance activities indoors, maintaining an organized inventory of materials used in the shop, draining all parts of fluids prior to disposal, prohibiting wet clean-up practice where the practice would result in the exposure of pollutants to stormwater, using dry cleanup methods, and/or collecting the stormwater runoff from the maintenance area and providing treatment or recycling.
- 3.2.3.1.5 Material Handling Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from material handling operations and areas (i.e., fueling, paint & solvent mixing, disposal of process wastewater streams from vessels). The facility must consider covering fueling areas; using spill and overflow protection; mixing paints and solvents in a designated area, preferably indoors or under a shed; and minimizing run-on of stormwater to material handling areas. Where applicable, the plan must address the replacement or repair of leaking connections, valves, pipes, hoses, and soil chutes carrying wastewater from vessels.
- 3.2.3.1.6 Drydock Activities - The plan must address the routine maintenance and cleaning of the drydock to minimize the potential for pollutants in the stormwater runoff. The plan must describe the procedures for cleaning the accessible areas of the drydock prior to flooding and final cleanup after the vessel is removed and the dock is raised. Cleanup procedures for oil, grease, or fuel spills occurring on the drydock must also be included within the plan. The facility must consider items such as sweeping rather than hosing off debris and spent blasting material from the accessible areas of the drydock prior to flooding and having absorbent materials and oil containment booms readily available to contain and cleanup any spills.
- 3.2.3.1.7 General Yard Area - The plan must include a schedule for routine yard maintenance and cleanup. Scrap metal, wood, plastic, miscellaneous trash, paper, glass, industrial scrap, insulation, welding rods, packaging, etc., must be routinely removed from the general yard area. The facility must consider such measures as providing covered trash receptacles in each yard, on each pier, and on board each vessel being repaired.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, sediment traps to ensure that spent abrasives, paint chips, and solids will be intercepted and retained prior to entering the storm drainage system) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector R

identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility on a monthly basis. The following areas shall be included in all inspections: pressure washing area; blasting, sanding, and painting areas; material storage areas; engine maintenance and repair areas; material handling areas; drydock area; and general yard area. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. The pollution prevention plan shall identify how often training will take place, but in all cases training must be held at least annually (once per calendar year). Employee training must, at a minimum, address the following areas when applicable to a facility: used oil management; spent solvent management; proper disposal of spent abrasives; proper disposal of vessel wastewaters, spill prevention and control; fueling procedures; general good housekeeping practices; proper painting and blasting procedures; and used battery management. Employees, independent contractors, and customers must be informed about BMPs and be required to perform in accordance with these practices. The facility should consider posting easy to read descriptions or graphic depictions of BMPs and emergency phone numbers in the work areas.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector R

indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph “Failure to Certify” (below).

- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division’s local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures or other equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity including, but not limited to, pressure washing area, blasting and sanding areas, painting areas, material storage areas, engine maintenance and repair areas, material handling areas, and drydock area, shall be visually inspected for evidence of, or the potential for, pollutants entering the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector R

drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.

- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.R.3.2. of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.R.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.R.3.2.3.4 the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector R

- 5.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
- 5.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for Each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

Sector S - Stormwater Discharges Associated With Industrial Activity From Vehicle Maintenance Areas, Equipment Cleaning Areas, or Deicing Areas Located at Air Transportation Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges from establishments and/or facilities including airports, air terminals, air carriers, flying fields, and establishments engaged in servicing or maintaining airports and/or aircraft which have vehicle maintenance shops, material handling facilities, equipment cleaning operations or airport and/or aircraft deicing/anti-icing operations:

SIC Code	Sector S: Vehicle Maintenance Areas, Equipment Cleaning Areas or From Airport Deicing Operations located at Air Transportation Facilities	Sampling Required?	Table Number
4512	Air Transportation, Scheduled	No*	S-1
4513	Air Courier Services	No*	S-1
4522	Air Transportation, Nonscheduled	No*	S-1
4581	Airports, Flying Fields, and Airport Terminal Services	No*	S-1
* Except for airports that use more than 100,000 gallons of glycol-based deicing/anti-icing chemicals and/or 100 tons or more of urea on an average annual basis: see Part 5: "Monitoring and Reporting Requirements."			

For the purpose of this permit, the term "deicing" is defined as the process to remove frost, snow, or ice and "anti-icing" is the process which prevents the accumulation of frost, snow, or ice.

Coverage. Only those portions of the facility or establishment that are either involved in vehicle maintenance (including vehicle rehabilitation, mechanical repairs, painting, fueling, and lubrication), equipment cleaning operations, or deicing/anti-icing operations are addressed under this section.

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

- 2.1 Prohibition of Non-stormwater Discharges. In addition to those discharges prohibited under Part 3.1, non-stormwater discharges including aircraft, ground vehicle, runway and equipment washwaters, and dry weather discharges of deicing/anti-icing chemicals are not authorized by this permit. Dry weather discharges are those discharges generated by processes other than those included in the definition of stormwater. The definition of stormwater includes stormwater runoff, snow melt runoff, and surface runoff and drainage. All other discharges constitute non-stormwater discharges. Operators of non-stormwater discharges must obtain coverage under a separate National Pollutant Discharge Elimination

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

System (NPDES) permit if discharged to waters of the state or through a municipal separate storm sewer system.

- 2.2 Releases of Reportable Quantities of Hazardous Substances and Oil. each individual permittee is required to report spills equal to or exceeding the reportable quantity levels specified at 40 CFR 110, 117, and 302 as described at section 6.2.2. If an airport authority is the sole permittee, then the sum total of all spills at the airport must be assessed against the RQ. If the airport authority is a co-permittee with other deicing/anti-icing operators at the airport, such as numerous different airlines, the assessed amount must be the summation of spills by each co-permittee. If separate, distinct individual permittees exist at the airport, then the amount spilled by each separate permittee must be the assessed amount for the RQ determination.

3. Stormwater Pollution Prevention Plan Requirements

- 3.1 Storm water pollution prevention plans developed for areas of the facility occupied by tenants of the airport shall be integrated with the plan for the entire airport. For the purposes of today's permit, tenants of the airport facility include airline companies, fixed based operators and other parties which have contracts with the airport authority to conduct business operations on airport property which result in stormwater discharges associated with industrial activity as described in paragraph 1 of this section. Plans should be developed in accordance with Part IV. Stormwater Pollution Prevention Plans).
- 3.2 Contents of Plan. Each plan shall include, at a minimum, the following items:
- 3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals as member(s) of a stormwater Pollution Prevention Team who are responsible for developing the stormwater pollution prevention plan and assisting the facility management in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.
- 3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:
- 3.2.2.1 Drainage. A site map indicating an outline of the drainage area of each stormwater outfall within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under paragraph 11.S.3.2.2.3 (Spills and Leaks) of this section have occurred, and the locations of the following activities where such activities are exposed to precipitation: aircraft and runway deicing/anti-icing operations; fueling stations; aircraft, ground vehicle and equipment maintenance and/or cleaning areas; storage areas for aircraft, ground vehicles and equipment awaiting maintenance; loading/unloading areas; locations used for the treatment, storage or disposal of

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

wastes, liquid storage tanks, processing areas and storage areas. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

The site map developed for the entire airport shall indicate the location of each tenant of the facility that conducts industrial activities as described in Part 11.S.1, and incorporate information from the tenants site map (including a description of industrial activities, significant materials exposed, and existing management practices).

- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment of stormwater runoff.
- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: aircraft, runway, ground vehicle and equipment maintenance and cleaning; aircraft and runway deicing/anti-icing operations (including apron and centralized aircraft deicing/anti-icing stations, runways, taxiways and ramps); outdoor storage activities; loading and unloading operations; and onsite waste disposal. The description shall specifically list any significant potential source of pollutants at the facility and for each potential source, any pollutant or pollutant parameter [e.g., biochemical oxygen demand (BOD5), oil and grease, etc.] of concern shall be identified.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

Facilities which conduct deicing/anti-icing operations shall maintain a record of the types [including the Material Safety Data Sheets (MSDS)] and monthly quantities of deicing/anti-icing chemicals used. Tenants and fixed-base operators who conduct deicing/anti-icing operations shall provide the above information to the airport authority for inclusion in the stormwater pollution prevention plan for the entire facility.

- 3.2.3 Measures and Controls. Operators covered by this permit shall develop a description of stormwater management controls appropriate for their areas of operation, and implement such controls. The priority in selecting controls shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.
- 3.2.3.1.1 Aircraft, Ground Vehicle and Equipment Maintenance Areas - Permittees should ensure the maintenance of equipment is conducted in designated areas only and clearly identify these areas on the ground and delineate them on the site map. The plan must describe measures that prevent or minimize the contamination of the stormwater runoff from all areas used for aircraft, ground vehicle and equipment maintenance (including the maintenance conducted on the terminal apron and in dedicated hangars). Management practices or equivalent measures such as performing maintenance activities indoors, maintaining an organized inventory of materials used in the maintenance areas, draining all parts of fluids prior to disposal, preventing the practice of hosing down the apron or hangar floor, using dry cleanup methods, and/or collecting the stormwater runoff from the maintenance area and providing treatment or recycling should be considered.
- 3.2.3.1.2 Aircraft, Ground Vehicle and Equipment Cleaning Areas - Permittees should ensure that cleaning of equipment is conducted in designated areas only and clearly identify these areas on the ground and delineate them on the site map. The plan must describe measures that prevent or minimize the contamination of the stormwater runoff from all areas used for aircraft, ground vehicle and equipment cleaning. Management practices such as performing cleaning operations indoors, and/or collecting the stormwater runoff from the cleaning area and providing treatment or recycling should be considered.
- 3.2.3.1.3 Aircraft, Ground Vehicle and Equipment Storage Areas - The storage of aircraft, ground vehicles and equipment awaiting maintenance must be confined to designated areas (delineated on the site map). The plan must describe measures that prevent or minimize the contamination of the stormwater runoff from these areas. Management practices such as indoor storage of aircraft and ground vehicles, the use of drip pans for the collection of fluid leaks, and perimeter drains, dikes or berms surrounding storage areas should be considered.
- 3.2.3.1.4 Material Storage Areas - Storage units of all materials (e.g., used oils, hydraulic fluids, spent solvents, and waste aircraft fuel) must be maintained in good condition, so as to prevent or minimize contamination of stormwater, and plainly labeled (e.g., "used oil," "Contaminated Jet A," etc.). The plan must describe measures that prevent or minimize contamination of the stormwater runoff from storage areas. Management practices or equivalent measures such as

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

indoor storage of materials, centralized storage areas for waste materials, and/or installation of berming and diking around storage areas should be considered for implementation.

- 3.2.3.1.5 Airport Fuel System and Fueling Areas - The plan must describe measures that prevent or minimize the discharge of fuels to the storm sewer resulting from fuel servicing activities or other operations conducted in support of the airport fuel system. Where the discharge of fuels into the storm sewer cannot be prevented, the plan shall indicate measures that will be employed to prevent or minimize the discharge of the contaminated runoff into receiving surface waters. Management practices or equivalent measures such as implementing spill and overflow practices (e.g., placing sorptive materials beneath aircraft during fueling operations), using dry cleanup methods, and/or collecting the stormwater runoff should be considered.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, removing debris from catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan shall describe material handling procedures, storage requirements, and consider the use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.3.1 Source Reduction - Operators who conduct aircraft and/or runway (including taxiways and ramps) deicing/anti-icing operations shall evaluate present operating procedures to consider alternative practices to reduce the overall amount of deicing/anti-icing chemicals used and/or lessen the environmental impact of the pollutant source.
- 3.2.3.3.2 With regard to runway deicing operations, operators, at a minimum, shall evaluate: present application rates to ensure against excessive over application; metered application of deicing chemical; pre-wetting dry chemical constituents prior to application; installation of runway ice detection systems; implementing anti-icing operations as a preventive measure against ice buildup; the use of substitute deicing compounds such as potassium acetate in lieu of ethylene glycol, propylene glycol and/or urea.
- 3.2.3.3.3 In considering source reduction management practices for aircraft deicing operations, operators, at a minimum, should evaluate current application rates and practices to ensure against excessive over application, and consider pretreating aircraft with hot water prior to the application of a deicing chemical, thus reducing the overall amount of chemical used per operation.
- 3.2.3.3.4 Source reduction measures that the operator determines to be reasonable and appropriate shall be implemented and maintained. The plan shall provide a narrative explanation of the options

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

considered and the reasoning for whether or not to implement them.

- 3.2.3.4 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which prevent or reduce source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 11.S.3.2.2 (Description of Potential Pollutant Sources)] shall be considered. Appropriate measures or equivalent measures may include: vegetative swales, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices. Measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained.

Operators that conduct aircraft and/or runway deicing/anti-icing operations shall also provide a narrative consideration of management practices to control or manage contaminated runoff from areas where deicing/anti-icing operations occur to reduce the amount of pollutants being discharged from the site. Structural controls such as establishing a centralized aircraft deicing facility, and/or collection of contaminated runoff for treatment or recycling should be considered. Collection and treatment alternatives include, but are not limited to, retention basins, detention basins with metered controlled release, Underground Storage Tanks (USTs) and/or disposal to Publicly Owned Treatment Works (POTW) by way of sanitary sewer or hauling tankers. Runoff management controls that the operator determines to be reasonable and appropriate shall be implemented and maintained. The plan should consider the recovery of deicing/anti-icing materials when these materials are applied during non-precipitation events to prevent these materials from later becoming a source of stormwater contamination. The plan shall provide a narrative explanation of the controls selected and the reasons for their selection.

- 3.2.3.5 Inspections - In addition to or as part of the comprehensive site evaluation required under this section, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility specified in the plan. The inspection frequency shall be specified in the plan, but at a minimum be conducted once per week during deicing/anti-icing application periods for areas where deicing/anti-icing operations are being conducted. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained. The use of a checklist developed by the pollution prevention team is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.6 Pollution Prevention Training - Pollution prevention training programs shall be developed to inform management and personnel responsible for implementing activities identified in the stormwater pollution prevention plan of the components and goals of the plan. Training should address topics such as spill response, good housekeeping, aircraft and runway deicing/anti-icing procedures, and material management practices. The pollution prevention plan shall identify periodic dates for such training.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

- 3.2.3.7 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan. Inspections and maintenance activities shall be documented and records shall be incorporated into the plan.
- 3.2.3.8 Non-stormwater Discharges
- 3.2.3.8.1 The plan shall include a certification that the discharge points have been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).
- 3.2.3.8.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not permitted under an individual NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.8.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by Not later than 180 days after submitting a notice of intent to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.8.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations during periods of deicing/anti-icing operations at appropriate

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:

- 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.S.3.2.3 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.S.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.S.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

5.1 Analytical Monitoring Requirements

During the period beginning on the effective date and lasting through the expiration date of this permit, (airports that use more than 100,000 gallons of glycol-based deicing/anti-icing) chemicals and/or 100 tons or more of urea on an average annual basis):

Shall prepare estimates for annual pollutant loadings resulting from discharges of spent deicing/anti-icing chemicals from the entire airport. The loading estimates shall reflect the amounts of deicing/anti-icing chemicals discharged to separate storm sewer systems or surface waters, prior to and after implementation of the facility's stormwater pollution prevention plan. Such estimates shall be reviewed by an environmental professional, and certified by such professional. By means of the certification, the environmental professional, having examined the facility's deicing/anti-icing procedures, and proposed control measures described in the stormwater pollution prevention plan, shall attest that the loading estimates have been accurately prepared. Certified loading estimates are to be retained at the airport facility and attached to the stormwater pollution prevention plan.

5.2 Analytical Monitoring Requirements

During the term of this permit, airports that use more than 100,000 gallons of glycol-based deicing/anti-icing) chemicals and/or 100 tons or more of urea on an average annual basis must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of this industrial sector (1. Discharges Covered Under This Section). Airports which are subject to these monitoring requirements must sample their stormwater discharges for the parameters listed in Table S-1 below. Such facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table S-1 below, the permittee shall maintain a record of the date and duration (in hours) of the precipitation event(s) sampled; measurements or estimates (in inches) of the precipitation event that generated the sampled runoff; the duration between the event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table S-1. Benchmark Monitoring Requirements

Pollutants of Concern	Benchmark [mg/L]
Biochemical Oxygen Demand (BOD ₅)	30
Chemical Oxygen Demand (COD)	120
Ammonia	4
pH	5.0 to 9.0 SU

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

For the purposes of today's final permit, the "average annual" usage rate of deicing/anti-icing chemicals is determined by averaging the cumulative amount of deicing/anti-icing chemicals used by all operators at the airport facility in the 3 previous calendar years.

5.2.1 Monitoring Periods. Airports where more than 100,000 gallons of glycol-based deicing/anti-icing chemicals and/or 100 tons or more of urea are used on an average annual basis shall monitor outfalls from the facility that collect runoff from areas where deicing/anti-icing activities occur four times per year during the months of December, January, and February when deicing/anti-icing activities are occurring, in the years specified in paragraph b. (above).

5.2.2 Sample Type. A minimum of one grab sample and one flow-weighted composite sample shall be taken from each outfall that collects runoff from areas where deicing/anti-icing activities occur. All such samples shall be collected from a discharge resulting from a precipitation event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) precipitation event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample should be taken when pollutant concentrations in the stormwater/melt water discharges from deicing/anti-icing operations are expected to be at a maximum. The recommended methodology for performing grab and flow-weighted composite sampling is described at 40 CFR 122.21(g)(7). The permittee has the option to submit site-specific deicing/anti-icing discharge monitoring protocol and methodology, better suited to the particular facility, to the Division of Water Resources for approval.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

5.2.3 Sampling Waiver

5.2.3.1 Adverse Conditions - Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as high winds, blizzard conditions, ice storms, etc.) or otherwise make the collection of a sample impracticable (extended frozen conditions, etc.).

5.2.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark), a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility which drains to the outfall for which sampling was waived.

5.2.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.2.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

5.2.5 Alternative Certification. The Alternative Certification provision discussed in other sections of Part 11 is not applicable to discharges included under Part 11.S. (Stormwater Discharges Associated with Industrial Activity from Vehicle Maintenance Areas, Equipment Cleaning Areas, or Deicing/Anti-icing Areas Located at Air Transportation Facilities).

5.3 Reporting

Airports shall submit monitoring results for each outfall associated with industrial activity obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no**

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

later than the March 31st of the following calendar year, whichever comes first. For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

5.4 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in (1), below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

5.4.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snow melt: January through March; April through June; July through September; and October through December.

5.4.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed one hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual will carry out the collection and examination of discharges for the life of the permit.

5.4.3 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examination. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.4.4 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

5.4.5 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector S

5.4.6 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfalls provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explaining in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector T

Sector T - Stormwater Discharges Associated With Industrial Activity From Treatment Works

1. Discharges Covered Under This Section

This permit covers all existing point source discharges of stormwater from treatment works treating domestic sewage or any other sewage sludge or wastewater treatment device or system, used in the storage, treatment, recycling, and reclamation of municipal or domestic sewage, including lands dedicated to the disposal of sewage sludge that are located within the confines of the facility with a design flow of 1.0 MGD or more, or required to have an approved pretreatment program under 40 CFR Part 403.

SIC Code	Sector T: Wastewater Treatment Works	Sampling Required?	Table Number
4952	Sewerage Systems	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of the Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team who are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector T

from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:

- 3.2.2.1 **Drainage** - A site map indicating the location of each point of discharge of stormwater associated with industrial activity, types of discharges contained in the drainage areas of the outfalls, an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries (with a prediction of the direction of flow), each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.T.3.2.2.3. (Spills and Leaks) of this permit have occurred. In addition, the locations of the following activities shall be indicated: fueling areas; vehicle and equipment maintenance and/or cleaning areas; locations used for treatment, storage and disposal areas for wastes, liquid storage tanks, processing areas and storage areas for process chemicals, petroleum products, solvents, fertilizers, herbicides and pesticides; and loading/unloading areas. The areas surrounding storm drain inlets and outfall points should also be free of material that could discharge off-site and contribute to pollutants in stormwater.
- 3.2.2.2 **Inventory of Exposed Materials** - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 **Spills and Leaks** - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 **Sampling Data** - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 **Summary of Potential Pollutant Sources** - A narrative description of the potential pollutant sources from the following activities associated with treatment works: access roads/rail lines; loading and unloading operations; outdoor storage activities; material handling sites; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., acid, bases, and solvents, etc.) of concern shall be identified.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector T

3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:

3.2.3.1 Good Housekeeping - All areas that may contribute pollutants to stormwater discharges shall be maintained in a clean, orderly manner.

3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.

3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points, shall be identified clearly in the stormwater pollution prevention plan. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures and equipment for cleaning up spills shall be identified in the plan and made available to the appropriate personnel.

3.2.3.4 Inspections - In addition to the comprehensive site evaluation required under this permit, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility on a periodic basis. The following areas shall be included in all inspections: access roads/rail lines, equipment storage and maintenance areas (both indoor and outdoor areas); fueling; material handling areas, residual treatment, storage, and disposal areas; and wastewater treatment areas. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify how often training will take place, but training should be held at least annually (once per calendar year). Employee training must, at a minimum, address the following areas when applicable to a facility: petroleum product management; process chemical management; spill prevention and control; fueling procedures; general good housekeeping practices; proper procedures for using fertilizers, herbicides and pesticides.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector T

- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be practical if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not practical, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with Failure to Certify, below, of this permit.
- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 A copy of all the current NPDES permit issued for wastewater, industrial, vehicle and equipment wash water discharges or, if an NPDES permit has not yet been issued, a copy of the pending application must be attached to the plan. For facilities that discharge vehicle and equipment washwaters to the sanitary sewer system, the operator of the sanitary system and associated treatment plant must be notified. In such cases, a copy of the notification letter must be attached to the plan. If an industrial user permit is issued under a pretreatment program, a copy of that permit must be attached in the plan. In all cases, any permit conditions must be considered in the plan. The disposal method of washwaters including handled (e.g., hauled offsite) must be described and all pertinent documentation (e.g., frequency, volume, destination, etc.) must be attached to the plan.
- 3.2.3.7.4 Failure to Certify. Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notifications shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector T

stormwater discharges to waters of the state that are not authorized by an NPDES permit are unlawful and must be terminated.

- 3.2.3.7.5 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.6 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see Part 11.T.3.2.2 (Description of Potential Pollutant Sources) of this permit] shall be considered when determining reasonable and appropriate measures. Appropriate measures or other equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
 - 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with Part 11.T.3.2.2 (Description of Potential Pollutant Sources) of this permit and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.T.3.2.3 (Measures and Controls) of this permit shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
 - 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector T

does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.T.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
- 5.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector T

- 5.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

Sector U - Stormwater Discharges Associated With Industrial Activity From Food and Kindred Products Facilities

1. Discharges Covered Under This Section

This section covers all stormwater discharges from food and kindred products processing facilities, manufacturing the following products and generally described by the SIC codes shown below, except for stormwater discharges identified under paragraph I.B.3. where industrial plant yards; material handling sites; refuse sites; sites used for application or disposal of process wastewaters; sites used for storage and maintenance of material handling equipment; sites used for residential treatment, storage, or disposal; shipping and receiving areas; manufacturing buildings; and storage areas for raw material and intermediate and finished products are exposed to stormwater and areas where industrial activity has taken place in the past and significant materials remain. For the purposes of this paragraph, material handling activities include the storage, loading, and unloading, transportation, or conveyance of any raw material, intermediate product, finished product, by-product, or waste product.

SIC Code	Sector U: Food and Kindred Products Facilities	Sampling Required?	Table Number
2011	Meat Packing Plants	Yes	U-1
2013	Sausages and Other Prepared Meats	Yes	U-1
2015	Poultry Slaughtering and Processing	Yes	U-1
2021	Creamery Butter	Yes	U-1
2022	Natural, Processed, and Imitation Cheese	Yes	U-1
2023	Dry, Condensed, and Evaporated Dairy Products	Yes	U-1
2024	Ice Cream and Frozen Desserts	Yes	U-1
2026	Fluid Milk	Yes	U-1
2032	Canned Specialties	Yes	U-1
2033	Canned Fruits, Vegetables, Preserves, Jams, and Jellies	Yes	U-1
2034	Dried and Dehydrated Fruits, Vegetables, and Soup Mixes	Yes	U-1
2035	Pickled Fruits and Vegetables, Vegetables Sauces and Seasonings, and Salad Dressings	Yes	U-1
2037	Frozen Fruits, Fruit Juices, and Vegetables	Yes	U-1
2038	Frozen Specialties, NEC	Yes	U-1
2041	Flour and Other Grain Mill Products	Yes	U-1
2043	Cereal Breakfast Foods	Yes	U-1
2044	Rice Milling	Yes	U-1
2045	Prepared Flour Mixes and Doughs	Yes	U-1
2046	Wet Corn Milling	Yes	U-1
2047	Dog and Cat Food	Yes	U-1
2048	Prepared Feed and Feed Ingredients for Animals and Fowls, Except Dogs and Cats	Yes	U-1
2051	Bread and Other Bakery Products, Except Cookies and Crackers	Yes	U-1
2052	Cookies and Crackers	Yes	U-1
2053	Frozen Bakery Products, Except Bread	Yes	U-1
2061	Cane Sugar, Except Refining	Yes	U-1
2062	Cane Sugar Refining	Yes	U-1
2063	Beet Sugar	Yes	U-1
2064	Candy and Other Confectionery Products	Yes	U-1
2066	Chocolate and Cocoa Products	Yes	U-1
2067	Chewing Gum	Yes	U-1
2068	Salted and Roasted Nuts and Seeds	Yes	U-1
2074	Cottonseed Oil Mills	Yes	U-2
2075	Soybean Oil Mills	Yes	U-2

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

SIC Code	Sector U: Food and Kindred Products Facilities	Sampling Required?	Table Number
2076	Vegetable Oil Mills, Except Corn, Cottonseed, and Soybeans	Yes	U-2
2077	Animal and Marine Fats and Oils	Yes	U-2
2079	Shortening, Table Oils, Margarine, and Other Edible Fats and Oils, NEC	Yes	U-2
2082	Malt Beverages	Yes	U-1
2083	Malt	Yes	U-1
2084	Wines, Brandy, and Brandy Spirits	Yes	U-1
2085	Distilled and Blended Liquors	Yes	U-1
2086	Bottled and Canned Soft Drinks and Carbonated Waters	Yes	U-1
2087	Flavoring Extracts and Flavoring Syrups NEC	Yes	U-1
2091	Canned and Cured Fish and Seafood	Yes	U-1
2092	Prepared Fresh or Frozen Fish and Seafoods	Yes	U-1
2095	Roasted Coffee	Yes	U-1
2096	Potato Chips, Corn Chips, and Similar Snacks	Yes	U-1
2097	Manufactured Ice	Yes	U-1
2098	Macaroni, Spaghetti, Vermicelli, and Noodles	Yes	U-1
2099	Food Preparations, NEC	Yes	U-1
2111	Cigarettes	Yes	U-1
2121	Cigars	Yes	U-1
2131	Chewing and Smoking Tobacco and Snuff	Yes	U-1
2141	Tobacco Stemming and Redrying	Yes	U-1

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

- 3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.
- 3.2 Contents of Plan. The plan shall include, at a minimum, the following items:
 - 3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

- 3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:
- 3.2.2.1 Drainage - A site map indicating the pattern of stormwater drainage, existing structural control measures to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, and locations where major spills or leaks identified under Part 11.U.3.2.2.3 (Spills and Leaks) of this permit have occurred since 3 years prior to the date of the submission of an NOI to be covered under this permit. The map must also indicate the locations of all industrial activities that are exposed to precipitation, including, but not limited to: loading/unloading areas; vehicle fueling; vehicle and equipment maintenance and/or cleaning areas; waste treatment, storage and disposal locations; liquid storage tanks; vents and stacks from cooking, drying, and similar operations, dry product vacuum transfer lines; animal holding pens; spoiled product and broken product container storage areas; significant dust or particulate generating areas; and any other processing and storage areas exposed to stormwater. Flows with a significant potential for causing erosion shall also be identified. In addition, the site map must identify monitoring locations. In addition, the map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.
- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Summary of Potential Pollutant Sources - The description of potential pollutant sources culminates in a narrative assessment of the risk potential that the industrial activities, materials, and physical features of the site, as identified in XI.U.3.a.(2)(a) (drainage), pose to stormwater

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

quality. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, oil and grease, etc.) of concern shall be identified.

In addition to food and kindred products processing-related industrial activities, the plan must also describe application/storage of pest control chemicals (e.g., rodenticides, insecticides, fungicides, and others) used on plant grounds, including a description of pest control application and chemical storage practices.

- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Areas that must be identified should include loading/unloading stations, outdoor storage areas, and waste management areas exposed to stormwater. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - In addition to the comprehensive site evaluation required under this section, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility. At a minimum, the following areas, where the potential for exposure to stormwater exists, must be inspected on a regularly scheduled basis: loading and unloading areas for all significant materials; storage areas, including associated containment areas; waste management units; vents and stacks emanating from industrial activities; spoiled product and broken product container holding areas; animal holding pens; staging areas; and air pollution control equipment. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained. Based on the results of the inspection, the description of potential pollutant sources and pollution prevention measures and controls identified in the plan shall be revised as appropriate within 2 weeks of such inspection and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the inspection.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping, material management practices, unloading/loading practices, outdoor storage areas, waste management practices, pest control, and improper connections to the storm sewer. At a minimum, this training must be provided annually. The pollution prevention plan shall identify frequencies and approximate dates for such training.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan. Ineffective BMPs must be recorded and the date of their corrective actions noted in the plan.
- 3.2.3.7 Non-stormwater Discharges
 - 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with section Failure to Certify, below, of this permit.
 - 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

If the facility discharges wastewater, other than stormwater via an existing NPDES permit, a copy of the NPDES permit authorizing the discharge must be attached to the plan. Similarly, if the facility submitted an application for an NPDES permit for non-stormwater discharges, but has not yet received that permit, a copy of the permit application must be attached. Upon

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

issuance or reissuance of an NPDES permit, the facility must modify its plan to include a copy of that permit.

- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see Part 11.U.3.2.2 (Description of Potential Pollutant Sources) of this permit] shall be considered when determining reasonable and appropriate measures. Appropriate measures or equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Where compliance evaluation schedules overlap with inspections required under this section, the compliance evaluation may be conducted in place of one such inspection. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
 - 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with Part 11.U.3.2.2(Description of Potential Pollutant Sources) of

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

this permit and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.U.3.2.3 (Measures and Controls) of this permit shall be revised as appropriate within 2 weeks of such inspection and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the inspection.

- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 The stormwater pollution prevention plan must describe the scope and content of the comprehensive site evaluations that qualified personnel will conduct to 1) confirm the accuracy of the description of potential sources contained in the plan, 2) determine the effectiveness of the plan, and 3) assess compliance with the terms and conditions of the permit. The individual or individuals who will conduct the evaluations must be identified in the plan and should be members of the pollution prevention team, as identified in the Pollution Prevention Team section.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table U-1 or U-2 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table U-1. Benchmark Monitoring Requirements for SIC 2011-2015, 2021-2026, 2032-2038, 2041-2048, 2051-2053, 2061-2068, 2082-2087, 2091-2099, 2111-2141 Facilities

Pollutants of Concern	Benchmark [mg/L]
Total Suspended Solids	150

Table U-2. Benchmark Monitoring Requirements for SIC 2074-2079 Facilities

Pollutants of Concern	Benchmark [mg/L]
Biochemical Oxygen Demand (BOD ₅)	30
Chemical Oxygen Demand (COD)	120
Nitrate Plus Nitrite Nitrogen	0.68
Total Suspended Solids	150

- 5.1.1 Monitoring Periods. Grain mill and fats and oils products facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.
- 5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or non-process water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.2 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark), a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility which drains to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

- 5.1.5 **Alternative Certification.** A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall, or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity, that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 **Reporting**

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s)). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

- 5.3 **Quarterly Visual Examination of Stormwater Quality.** Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination(s) must be made at least once in each of the following 3-month periods: January through March, April through June, July through September, and October through December. The examination shall be made during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.3.1 Examinations shall be made of a grab sample collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector U

occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for entire permit term.

- 5.3.2 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.3 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.4 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.5 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector V

Sector V - Stormwater Discharges Associated With Industrial Activity From Textile Mills, Apparel, and Other Fabric Product Manufacturing Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector V: Textile Mills, Apparel and other Fabric Product Manufacturing Facilities	Sampling Required?	Table Number
2211	Broadwoven Fabric Mills, Cotton	No	--
2221	Broadwoven Fabric Mills, Manmade Fiber and Silk	No	--
2231	Broadwoven Fabric Mills, Wool (Including Dyeing and Finishing)	No	--
2241	Narrow Fabric and Other Smallware Mills: Cotton, Wool, Silk, and Manmade Fiber	No	--
2251	Women's Full-Length and Knee-Length Hosiery, Except Socks	No	--
2252	Hosiery, NEC	No	--
2253	Knit Outerwear Mills	No	--
2254	Knit Underwear and Nightwear Mills	No	--
2257	Weft Knit Fabric Mills	No	--
2258	Lace and Warp Knit Fabric Mills	No	--
2259	Knitting Mills, NEC	No	--
2261	Finishers of Broadwoven Fabrics of Cotton	No	--
2262	Finishers of Broadwoven Fabrics of Manmade Fiber and Silk	No	--
2269	Finishers of Textiles, NEC	No	--
2273	Carpets and Rugs	No	--
2281	Yarn Spinning Mills	No	--
2282	Yarn Texturizing, Throwing, Twisting, and Winding Mills	No	--
2284	Thread Mills	No	--
2295	Coated Fabrics, Not Rubberized	No	--
2296	Tire Cord and Fabrics	No	--
2297	Nonwoven Fabrics	No	--
2298	Cordage and Twine	No	--
2299	Textile Goods, NEC	No	--
2311	Men's and Boys' Suits, Coats and Overcoats	No	--
2321	Men's and Boys' Shirts, Except Work Shirts	No	--
2322	Men's and Boys' Underwear and Nightwear	No	--
2323	Men's and Boys' Neckwear	No	--
2325	Men's and Boys' Trousers and Slacks	No	--
2326	Men's and Boys' Work Clothing	No	--
2329	Men's and Boys' Clothing, NEC	No	--
2331	Women's, Misses', and Juniors' Blouses and Shirts	No	--
2335	Women's, Misses' and Junior's Dresses	No	--
2337	Women's, Misses' and Juniors' Suits, Skirts and Coats	No	--
2339	Women's, Misses' and Juniors' Outerwear, NEC	No	--
2341	Women's, Misses, Children's, and Infants' Underwear and Nightwear	No	--
2342	Brassieres, Girdles, and Allied Garments	No	--
2353	Hats, Caps, and Millinery	No	--
2361	Girls', Children's and Infants' Dresses, Blouses and Shirts	No	--
2369	Girls', Children's and Infants' Outerwear, NEC	No	--
2371	Fur Goods	No	--
2381	Dress and Work Gloves, Except Knit and All-Leather	No	--
2384	Robes and Dressing Gowns	No	--

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector V

SIC Code	Sector V: Textile Mills, Apparel and other Fabric Product Manufacturing Facilities	Sampling Required?	Table Number
2385	Waterproof Outerwear	No	--
2386	Leather and Sheep-Lined Clothing	No	--
2387	Apparel Belts	No	--
2389	Apparel and Accessories, NEC	No	--
2391	Curtains and Draperies	No	--
2392	House furnishings, Except Curtains and Draperies	No	--
2393	Textile Bags	No	--
2394	Canvas and Related Products	No	--
2395	Pleating, Decorative and Novelty Stitching, and Tucking for the Trade	No	--
2396	Automotive Trimmings, Apparel Findings, and Related Products	No	--
2397	Schiffli Machine Embroideries	No	--
2399	Fabricated Textile Products, NEC	No	-

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

- 3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.
- 3.2 Contents of Plan. The plan shall include, at a minimum, the following items:
 - 3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team who are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.
 - 3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector V

significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:

- 3.2.2.1 **Drainage.** A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.V.3.2.2.3 (Spills and Leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks or silos, bulk storage areas that may exist, processing areas and storage areas, fueling stations, vehicle and equipment maintenance and/or cleaning areas. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

- 3.2.2.2 **Inventory of Exposed Materials -** An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 **Spills and Leaks -** A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 **Sampling Data -** A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 **Risk Identification and Summary of Potential Pollutant Sources -** A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector V

particulate generating processes; onsite waste disposal practices; industry-specific significant materials and industrial activities (e.g., backwinding, beaming, bleaching, backing, bonding carbonizing, carding, cut and sew operations, desizing, drawing, dyeing flocking, fulling, knitting, mercerizing, opening, packing, plying, scouring, slashing, spinning, synthetic-felt processing, textile waste processing, tufting, turning, weaving, web forming, winging, yarn spinning, and yarn texturing). The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.

- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner. The following areas must be specifically addressed, when applicable at the facility:
- 3.2.3.1.1 Material Storage Areas - All stored and containerized materials (fuels, petroleum products, solvents, dyes, etc.) must be stored in a protected area, away from drains and clearly labeled. The plan must describe measures that prevent or minimize contamination of stormwater runoff from such storage areas. The facility should specify which materials are stored indoors and must provide a description of the containment area or enclosure for those materials which are stored outdoors. Above ground storage tanks, drums, and barrels permanently stored outside must be delineated on the site map with a description of the appropriated containment measures in place to prevent leaks and spills. The facility may consider an inventory control plan to prevent excessive purchasing, storage, and handling of potentially hazardous substances. In the case of storage of empty chemical drums and containers, facilities should employ practices which ensure that barrels are clean and residuals are not subject to contact with stormwater, such practices may include triple-rinsing containers. The discharge waters from such washings must be collected and disposed of properly.
- 3.2.3.1.2 Material Handling Area - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from materials handling operations and areas. The facility may consider the use of spill and overflow protection; covering fueling areas; covering and enclosing areas where the transfer of materials may occur. Where applicable, the plan must address the replacement or repair of leaking connections, valves, transfer lines and pipes that may carry chemicals, dyes, or wastewater.
- 3.2.3.1.3 Fueling Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from fueling areas. The facility may consider covering the fueling area, using spill and overflow protection, minimizing run-on of stormwater to the fueling area, using dry cleanup methods, and/or collecting the stormwater runoff and providing treatment or recycling.
- 3.2.3.1.4 Above Ground Storage Tank Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from above ground storage tank areas. The facility

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector V

must consider storage tanks and their associated piping and valves. The facility may consider regular cleanup of these areas, preparation of a spill prevention control and countermeasure program, provide spill and overflow protection, minimizing run-on of stormwater from adjacent areas, restrict access to the area, insertion of filters in adjacent catch basins, provide absorbent booms in unbermed fueling areas, use of dry cleanup methods, and permanently sealing drains within critical areas that may discharge to a storm drain.

- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, sediment traps, catch basins, infiltration devices, ponds) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. Inspection intervals are to occur on a monthly basis. Inspections of this nature shall include, but not be limited to, the following areas: all containment and storage areas, transfer and transmission lines, spill prevention, good housekeeping practices, management of process waste products, all structural and nonstructural management practices. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify dates for such training to take place at least annually (once per calendar year). Employee training must, at a minimum address the following areas when applicable to a facility: use of reused/recycled waters; solvents management; proper disposal of dyes; proper disposal of petroleum products and spent lubricants; spill prevention and control; fueling procedures; and general good housekeeping practices. Employees, independent contractors, and customers must be informed about BMPs and be required to perform in accordance with

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector V

these practices. Copies of BMPs and any specific management plans, including emergency phone numbers, shall be posted in the work areas.

- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).
- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector V

- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 11.V.3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures or other equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:
- 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity (storage tank areas, waste disposal and storage areas, dumpsters and open containers stored outside, materials storage areas, engine maintenance and repair areas, material handling areas, and loading dock areas) shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.V.3.2.2 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.V.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.V.3.2.2.3, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
- 5.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for Each outfall that the permittee believes is representative, an estimate

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector V

- of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector W

Sector W - Stormwater Discharges Associated With Industrial Activity From Wood and Metal Furniture and Fixture Manufacturing Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector W: Furniture and Fixture Manufacturing Facilities	Sampling Required?	Table Number
2434	Wood Kitchen Cabinets	No	--
2511	Wood Household Furniture, Except Upholstered	No	--
2512	Wood Household Furniture, Upholstered	No	--
2514	Metal Household Furniture	No	--
2515	Mattresses, Foundations, and Convertible Beds	No	--
2517	Wood Television, Radio, Phonograph and Sewing Machine Cabinets	No	--
2519	Household Furniture, NEC	No	--
2521	Wood Office Furniture	No	--
2522	Office Furniture, Except Wood	No	--
2531	Public Building and Related Furniture	No	--
2541	Wood Office and Store Fixtures, Partitions, Shelving, and Lockers	No	--
2542	Office and Store Fixtures, Partitions Shelving, and Lockers, Except Wood	No	--
2591	Drapery Hardware and Window Blinds and Shades	No	--
2599	Furniture and Fixtures, NEC	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

- 3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector W

- 3.2 Contents of Plan. The plan shall include, at a minimum, the following items:
- 3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.
- 3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:
- 3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.W.3.2.2.3 (Spills and Leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations; vehicle and equipment maintenance and/or cleaning areas; loading and unloading areas; material storage (including tanks or other vessels used for liquid or waste storage) areas; outdoor material processing areas; areas where wastes are treated, stored, or disposed; access roads; and rail spurs. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.
- For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of the chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.
- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector W

- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste treatment, storage, or disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - In addition to the comprehensive site compliance evaluation required under this permit, qualified facility personnel shall be identified to inspect the following on a quarterly basis: the integrity of stormwater discharge diversions, conveyance systems, sediment control and collection systems, and containment structures; vegetative BMPs to determine if soil erosion has occurred; and material handling and storage areas and other potential sources of pollution for evidence of actual or potential pollutant discharges of contaminated stormwater. Information must be maintained onsite and include the inspection date and time and the name

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector W

of personnel conducting the visual inspection. The pollution prevention plan must be updated based on the results of each inspection. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify periodic dates for such training.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), BMP inspection and maintenance activities, along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan. Ineffective BMPs must be reported and the date of their corrective action noted.
- 3.2.3.7 Non-stormwater Discharges
 - 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).
 - 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector W

- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 11.W.3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures or other equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but, in no case less than once a year. Such evaluations shall provide:
- 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity including, but not limited to, coal piles, ash disposal areas, loading/unloading operations, and waste treatment, storage, or disposal locations shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.W.3.2.2 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.W.3.2.3 of this section (Measures and Controls) shall be revised

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector W

as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.

- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.W.3.2.2.3 the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
- 5.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector W

- 5.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for Each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector X

Sector X - Stormwater Discharges Associated With Industrial Activity From Printing and Platemaking Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector X: Printing and Platemaking Facilities	Sampling Required?	Table Number
2721	Periodicals: Publishing, or Publishing and Printing	No	--
2732	Book Printing	No	--
2752	Commercial Printing, Lithographic	No	--
2754	Commercial Printing, Gravure	No	--
2759	Commercial Printing, NEC	No	--
2771	Greeting Cards	No	--
2796	Platemaking and Related Services	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

There are no additional special conditions beyond those described in part 3 of the TMSP.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector X

stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:

- 3.2.2.1 **Drainage.** A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.X.3.2.2.3 (Spills and Leaks) of this section have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas and storage areas. Above ground storage tanks, drums, and barrels permanently stored outside must be delineated on the site map. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of the chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

- 3.2.2.2 **Inventory of Exposed Materials -** An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 **Spills and Leaks -** A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 **Sampling Data -** A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector X

- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities associated with printing, platemaking and allied facilities: loading and unloading operations; outdoor storage activities; significant dust or particulate generating processes; and onsite waste disposal practices (i.e., blanket wash). The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., oil and grease, scrap metal, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner. Areas where good housekeeping should be implemented include:
- 3.2.3.1.1 Material Storage Areas - All stored and containerized materials (skids, pallets, solvents, bulk inks, and hazardous waste, empty drums, portable/mobile containers of plant debris, wood crates, steel racks, fuel oil, etc.) should be stored in a protected area, away from drains and properly labeled. The plan should describe measures that prevent or minimize contamination of the stormwater runoff from such storage areas. The facility should specify which materials are stored indoors and must provide a description of the containment area or enclosure for those materials which are stored outdoors. The facility may consider an inventory control plan to prevent excessive purchasing, storage, and handling of potentially hazardous substances. The facility may consider indoor storage of the materials and/or installation of berming and diking of the area.
- 3.2.3.1.2 Material Handling Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from materials handling operations and areas (i.e., blanket wash, mixing solvents, loading/unloading materials). The facility may consider the use of spill and overflow protection; covering fuel areas; covering and enclosing areas where the transfer of materials may occur. Where applicable, the plan must address the replacement or repair of leaking connections, valves, transfer lines and pipes that may carry chemicals, or wastewater.
- 3.2.3.1.3 Fueling Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from fueling areas. The facility may consider covering the fueling area, using spill and overflow protection, minimizing run-on of stormwater to the fueling area, using dry cleanup methods, and/or collecting the stormwater runoff and providing treatment or recycling.
- 3.2.3.1.4 Above Ground Storage Tank Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from above ground storage tanks and their associated piping and valves. The facility may consider regular cleanup of these areas, preparation of a spill prevention control and countermeasure program, provide spill and overflow protection, minimizing run-on of stormwater from adjacent facilities and properties, restrict access to the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector X

area, insertion of filters in adjacent catch basins, provide absorbent booms in unbermed fueling areas, use of dry cleanup methods, and permanently sealing drains within critical areas that may discharge to a storm drain.

3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, vegetative swales, secondary containment, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.

3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility on an annual basis. The following areas shall be included in, but not limited to, all inspections: all containment and material storage areas, fueling areas, loading and unloading areas, equipment cleaning areas. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. The pollution prevention plan shall identify how often training will take place, but training should be provided annually. Employee training must, at a minimum, address the following areas when applicable to a facility: spent solvent management; spill prevention and control; used oil management; fueling procedures; and general good housekeeping practices. The pollution prevention plan shall identify periodic dates for such training.

3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

3.2.3.7 Non-stormwater Discharges

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector X

- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).
- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 11.X.3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures or other equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector X

separators), snow management activities, infiltration devices, and wet detention/retention devices.

3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:

3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity (including, but not limited to, material handling areas, material storage areas, waste disposal and storage areas, loading/unloading areas) shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.

3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.X.3.2.2 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.X.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.

3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.X.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector X

Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
- 5.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for Each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector X

- 5.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Y

Sector Y - Stormwater Discharges Associated With Industrial Activity From Rubber, Miscellaneous Plastic Products, and Miscellaneous Manufacturing Industries

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector Y: Rubber and Miscellaneous Plastic Product Manufacturing Facilities	Sampling Required?	Table Number
3011	Tires and Inner Tubes	Yes	Y-1
3021	Rubber and Plastics Footwear	Yes	Y-1
3052	Rubber and Plastics Hose and Belting	Yes	Y-1
3053	Gaskets, Packing, and Sealing Devices	Yes	Y-1
3061	Molded, Extruded, and Lathe-Cut Mechanical Rubber Products	Yes	Y-1
3069	Fabricated Rubber Products, NEC	Yes	Y-1
3081	Unsupported Plastics Film and Sheet	No	--
3082	Unsupported Plastics Profile Shapes	No	--
3083	Laminated Plastics Plate, Sheet, and Profile Shapes	No	--
3084	Plastic Pipe	No	--
3085	Plastics Bottles	No	--
3086	Plastics Foam Products	No	--
3087	Custom Compounding of Purchased Plastics Resins	No	--
3088	Plastics Plumbing Fixtures	No	--
3089	Plastics Products, NEC	No	--
3931	Musical Instruments	No	--
3942	Dolls and Stuffed Toys	No	--
3944	Games, Toys, and Children's Vehicles, Except Dolls and Bicycles	No	--
3949	Sporting and Athletic Goods, NEC	No	--
3951	Pens, Mechanical Pencils and Parts	No	--
3952	Lead Pencils, Crayons, and Artist's Materials	No	--
3953	Marking Devices	No	--
3955	Carbon Paper and Inked Ribbons	No	--
3961	Costume Jewelry and Costume Novelties, Except Precious Metals	No	--
3965	Fasteners, Buttons, Needles, and Pins	No	--
3991	Brooms and Brushes	No	--
3993	Signs and Advertising Specialties	No	--
3995	Burial Caskets	No	--
3996	Linoleum, Asphalted-Felt-Base, and Other Hard Surface Floor Coverings, NEC	No	--
3999	Manufacturing Industries, NEC	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. All rubber manufacturers shall in particular review the use of zinc at their facilities and the possible pathways through which zinc may be discharged in stormwater runoff. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.Y.3.2.2.3 (Spills and Leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas and storage areas. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Y

- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. Facilities subject to EPCRA Section 313 should note that the special requirements of Part 4.5. of this permit also apply to their facilities. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Y

3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

3.2.3.4 Inspections - In addition to or as part of the comprehensive site evaluation required under this section, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention plan shall identify periodic dates for such training.

3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

3.2.3.7 Non-stormwater Discharges

3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Y

- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 11.Y.3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures or other equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.
- 3.2.3.7.5.1 Special Requirements for All Rubber Products Manufacturers - All rubber products manufacturing facilities shall include specific measures and controls to minimize the discharge of zinc in their stormwater discharges. The following possible sources of zinc shall be reviewed and the accompanying BMPs shall be included as appropriate in the stormwater pollution prevention plan:
- 3.2.3.7.5.2 Inadequate Housekeeping - All permittees shall review the handling and storage of zinc bags at their facilities and consider the following BMPs for the pollution prevention plan: employee training regarding the handling and storage of zinc bags, indoor storage of zinc bags, thorough cleanup of zinc spills without washing the zinc into the storm drain, and the use of 2,500-pound sacks of zinc rather than 50- to 100-pound sacks.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Y

- 3.2.3.7.5.3 Zinc in Dumpsters - The following BMPs or equivalent measures shall be considered to reduce discharges of zinc from dumpsters: providing a cover for the dumpster; move the dumpster to an indoors location; or provide a lining for the dumpster.
- 3.2.3.7.5.4 Malfunctioning Dust Collectors or Baghouses - Permittees shall review dust collectors and baghouses as possible sources in zinc in stormwater runoff. Improperly operating dust collectors or baghouses shall be replaced or repaired as appropriate. The pollution prevention plan shall also provide for regular maintenance of these facilities.
- 3.2.3.7.5.5 Grinding Operations - Permittees shall review dust generation from rubber grinding operations at their facility and, as appropriate, install a dust collection system.
- 3.2.3.7.5.6 Zinc Stearate Coating Operations - Permittees shall include in the pollution prevention plan appropriate measures to prevent and/or clean-up drips or spills of zinc stearate slurry which may be released to the storm drain. Alternate compounds to zinc stearate shall also be considered.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations once a year. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
 - 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.Y.3.2.2 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.Y.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
 - 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
 - 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.Y.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Numeric Effluent Limitations as described in part 4 of this sector (above) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 6.b. (Reporting). In addition to the parameters listed in Table Y-1 and Y-2 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table Y-1 Benchmark Monitoring Requirements for SIC 3011-3069 Facilities

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Zinc	0.395
Total Suspended Solids	150

5.1.1 Monitoring Periods. Rubber product manufacturing facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Y

magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

- 5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricanes, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark), a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Y

submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in area of the facility that drains to the outfall for which sampling was waived.

- 5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.
- 5.1.3.4 **Representative Discharge.** When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.
- 5.1.3.5 **Alternative Certification.** A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis, in lieu of monitoring reports required under paragraph b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph b below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 **Reporting**

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Y

Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

- 5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a representative stormwater discharge associated with industrial from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in (1), below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.
- 5.3.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snow melt: January through March; April through June; July through September; and October through December.
- 5.3.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed one hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Whenever practicable the same individual will carry out the collection and examination of discharges for the life of the permit.
- 5.3.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the observation data also applies to the substantially identical outfalls provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explaining in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Y

- 5.3.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examination. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Z

Sector Z - Stormwater Discharges Associated With Industrial Activity From Leather Tanning and Finishing Facilities

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below. Discharges from facilities that make fertilizer solely from leather scraps and leather dust are also covered under this section.

SIC Code	Sector Z: Leather Tanning and Finishing Facilities	Sampling Required?	Table Number
3111	Leather Tanning and Finishing	No	--
3143	Men's Footwear, Except Athletic	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

There are no special conditions for this section beyond those described in part 3 of the TMSP.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Z

significant materials which may potentially be significant pollutant sources or, during periods of dry weather, result in dry weather flows. Each plan shall include, at a minimum:

- 3.2.2.1 **Drainage.** A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies (including wetlands), locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.Z.3.2.2.3 (Spills and Leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, material storage (including tanks or other vessels used for liquid or waste storage), processing and storage areas for activities associated with beamhouse, tanyard, retan-wet finishing and dry finishing operations, and haul roads, access roads and rail spurs. The site map must also identify the location of all outfalls covered by this permit and include an inventory of the types of discharges contained in each outfall.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

- 3.2.2.2 **Inventory of Exposed Materials -** An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives. The description must be updated whenever there is a significant change in the types or amounts of materials, or material management practices, that may affect the exposure of materials to stormwater.

- 3.2.2.3 **Spills and Leaks -** A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Significant spills include but are not limited to, releases of oil or hazardous substances in excess of quantities that are reportable under Section 311 of the Clean Water Act (CWA) (see 40 CFR 110.10 and 40 CFR 117.21) or Section 102 of the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) (see 40 CFR 302.4). Significant spills may also include releases of oil or hazardous substances that are not in excess of reporting requirements and releases of materials that are not classified

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Z

as oil or a hazardous substance. Such list shall be updated as appropriate during the term of the permit.

- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of potential pollutant sources including but not limited to the following activities: loading and unloading operations; outdoor storage activities, including but not limited to: temporary or permanent storage of fresh and brine cured hides, chemical drums, bags, containers and above ground tanks, leather dust, scraps, trimmings and shavings, spent solvents, extraneous hide substances and hair, and empty chemical containers and bags; floor sweepings and washings; refuse and waste piles and sludge; outdoor manufacturing or processing activities; significant dust or particulate generating processes including buffing; vehicle maintenance, washing and fueling and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, total suspended solids, chromium, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
 - 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner. The following areas must be specifically addressed:
 - 3.2.3.1.1 Storage Areas for Raw, Semiprocessed, or Finished Tannery By-products - Pallets and/or bales of raw, semiprocessed or finished tannery by-products (e.g., splits, trimmings, shavings, etc.) should be stored indoors or protected by polyethylene wrapping, tarpaulins, roofed storage area or other suitable means. Materials should be placed on an impermeable surface, the area should be enclosed or bermed or other equivalent measures should be employed to prevent run-on and runoff of stormwater.
 - 3.2.3.1.2 Material Storage Areas - Label storage units of all materials (e.g., specific chemicals, hazardous materials, spent solvents, waste materials). Maintain such containers and units in good condition. Describe measures that prevent or minimize contact with stormwater. The facility must consider indoor storage, installation of berming and diking around the area, and/or other equivalent measures to prevent run-on and runoff of stormwater.
 - 3.2.3.1.3 Buffing/Shaving Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff with leather dust from buffing/shaving areas. The facility may consider dust collection enclosures, preventive inspection/maintenance programs or other appropriate preventive measures.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Z

- 3.2.3.1.4 Receiving, Unloading, and Storage Areas - The plan must describe measures that prevent or minimize contamination of the stormwater runoff from receiving, unloading, and storage areas. Exposed receiving, unloading and storage areas for hides and chemical supplies should be protected by a suitable cover, diversion of drainage to the process sewer, grade berming or curbing area to prevent run-on of stormwater or other appropriate preventive measures. Materials must be plainly labeled and maintained in good condition.
- 3.2.3.1.5 Outdoor Storage of Contaminated Equipment - The plan must describe measures that minimize contact of stormwater with contaminated equipment. Equipment should be protected by suitable cover, diversion of drainage to the process sewer, thorough cleaning prior to storage or other appropriate preventive measures.
- 3.2.3.1.6 Waste Management - The plan must describe measures that prevent contamination of the stormwater runoff from waste storage areas. The facility may consider inspection/maintenance programs or other equivalent measures for leaking containers or spills, covering dumpsters, moving waste management activities indoors, covering waste piles with temporary covering material such as tarpaulins or polyethylene, and minimizing stormwater run-on by enclosing the area or building berms around the area.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at least on a quarterly basis. The following areas shall be included in all inspections: leather processing areas, storage areas for chemicals, including but not limited to above ground tanks, fueling areas, vehicle and equipment maintenance areas, material storage areas, loading and unloading areas, waste management areas and other potential sources of pollution for evidence of actual or potential discharges of contaminated stormwater. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections and that the pollution prevention plan is appropriately modified. maintained as part of the SWPPP. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Z

- 3.2.3.4.1 Qualified personnel are required to conduct quarterly inspections of all Best Management Practices (BMPs). The inspections shall include an assessment of the effectiveness and need for maintenance of stormwater roofing and covers, dikes and curbs, discharge diversions, sediment control and collection systems and all other BMPs.
- 3.2.3.4.2 Quarterly inspections must be made at least once in each of the following designated periods during daylight hours: January through March (stormwater runoff or snow melt), April through June (stormwater runoff), July through September (stormwater runoff), and October through December (snow melt runoff). Records shall be maintained as part of the SWPPP.
- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. The pollution prevention plan shall identify how often training will take place, but in all cases, training must be held at least annually. Employee training must, at a minimum, address the following areas when applicable to a facility: general good housekeeping practices, spill prevention and control, waste management, inspections, preventive maintenance, detection of non-stormwater discharges and other areas.
- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as leaks, spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan. The plan must address spills, monitoring, and BMP inspection and maintenance activities. BMPs which were ineffective must be reported and the date of their corrective action recorded. Employees must report incidents of leaking fluids to facility management and these reports must be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
 - 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).
 - 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Z

component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 11.Z.3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures or equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices. In addition, the permittee must describe the stormwater pollutant source area or activity (e.g., storage areas, loading and unloading areas, above ground storage of chemicals) to be controlled by each stormwater management practice.

The plan must consider management practices, such as berms for uncovered storage areas, uncovered loading and unloading areas, above ground liquid storage and waste management areas. The installation of detention ponds must also be considered.

- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:
- 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Z

prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.

3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan and pollution prevention measures and controls shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.

3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

The stormwater pollution prevention plan must describe the scope and content of comprehensive site inspections that qualified personnel will conduct to 1) confirm the accuracy of the description of potential pollution sources contained in the plan, 2) determine the effectiveness of the plan, and 3) assess compliance with the terms and conditions of the permit. Comprehensive site compliance evaluations must be conducted at least once a year. The individual or individuals who will conduct the inspections must be identified in the plan and should be members of the pollution prevention team. Evaluation reports must be retained for at least 3 years from the date of the evaluation.

3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.Z.3.2.3.4 the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector Z

- 5.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
- 5.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for Each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

Sector AA - Stormwater Discharges Associated With Industrial Activity From Fabricated Metal Products Industry

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector AA: Facilities That Manufacture Metal Products including Jewelry, Silverware and Plated Ware	Sampling Required?	Table Number
3411	Metal Cans	Yes	AA-1
3412	Metal Shipping Barrels, Drums, Kegs, and Pails	Yes	AA-1
3421	Cutlery	Yes	AA-1
3423	Hand and Edge Tools, Except Machine Tools and Handsaws	Yes	AA-1
3425	Saw Blades and Handsaws	Yes	AA-1
3429	Hardware, NEC	Yes	AA-1
3431	Enameled Iron and Metal Sanitary Ware	Yes	AA-1
3432	Plumbing Fixture Fittings and Trim	Yes	AA-1
3433	Heating Equipment, Except Electric and Warm Air Furnaces	Yes	AA-1
3441	Fabricated Structural Metal	Yes	AA-1
3442	Metal Doors, Sash, Frames, Molding, and Trim Manufacturing	Yes	AA-1
3443	Fabricated Plate Work (Boiler Shops)	Yes	AA-1
3444	Sheet Metal Work	Yes	AA-1
3446	Architectural and Ornamental Metal Work	Yes	AA-1
3448	Prefabricated Metal Buildings and Components	Yes	AA-1
3449	Miscellaneous Structural Metal Work	Yes	AA-1
3451	Screw Machine Products	Yes	AA-1
3452	Bolts, Nuts, Screws, Rivets, and Washers	Yes	AA-1
3462	Iron and Steel Forgings	Yes	AA-1
3463	Nonferrous Forgings	Yes	AA-1
3465	Automotive Stamping	Yes	AA-1
3469	Metal Stamping, NEC	Yes	AA-1
3471	Electroplating, Plating, Polishing, Anodizing, and Coloring	Yes	AA-2
3479	Coating, Engraving, and Allied Services, NEC	Yes	AA-2
3484	Small Arms	Yes	AA-1
3489	Ordnance and Accessories, NEC	Yes	AA-1
3491	Industrial Valves	Yes	AA-1
3494	Valves and Pipe Fittings, NEC	Yes	AA-1
3495	Wire Springs	Yes	AA-1
3496	Miscellaneous Fabricated Wire Products	Yes	AA-1
3498	Fabricated Pipe and Pipe Fittings	Yes	AA-1
3499	Fabricated Metal Products, NEC	Yes	AA-1
3911	Jewelry, Precious Metal	Yes	AA-1
3914	Silverware, Plated Ware, and Stainless Steel Ware	Yes	AA-1
3915	Jewelers' Findings and Materials, and Lapidary Work	Yes	AA-1

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all industrial activities and significant materials which may potentially be significant pollutant sources. Each plan shall specifically identify the physical features of the facility that may contribute to stormwater runoff. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating the outfall locations and types of discharges contained in the drainage areas of the outfalls, an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.AA.3.2.2.3 (Spills and Leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: raw metal storage areas, finished metal storage areas, scrap disposal collection sites, equipment storage areas, retention and detention basins, temporary diversion dikes or berms, permanent diversion dikes or berms, right-of-way or perimeter diversion devices, any sediment traps or barriers, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas including outside painting areas, wood preparation, recycling and raw material storage.

For each area of the facilities that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. In addition, flows with a significant potential for causing erosion shall be identified such as heavy equipment use areas, drainage from roofs, parking lots, etc.

- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Significant spills that should be considered for the fabricated metals industry include, but are not limited to, chromium, toluene, pickle liquor, sulfuric acid, zinc and other water priority chemicals and hazardous chemicals and wastes. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations for paints, chemicals and raw materials; outdoor storage activities for raw materials, paints, empty containers, corn cob, chemicals, scrap metals; outdoor manufacturing or processing activities such as grinding, cutting, degreasing, buffing, brazing, etc.; significant dust or particulate generating processes; and onsite waste disposal practices for spent solvents, sludge, pickling baths, shavings, ingots pieces, refuse and waste piles. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical or chemical oxygen demand, chromium, total suspended solids, oil and grease, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner. Permittees should address the following areas in the manner described.
 - 3.2.3.1.1 Raw Steel Handling Storage-Include measures controlling or recovering scrap metals, fines, and iron dust, including measures for containing materials within storage handling areas.
 - 3.2.3.1.2 Paints and Painting Equipment-Consider control measures to prevent or minimize exposure of paint and painting equipment from exposure to stormwater.
- 3.2.3.2 Preventive Maintenance - Preventive maintenance measures shall include timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which could contribute pollutants to stormwater discharges may occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel. The following areas should be addressed:
 - 3.2.3.3.1 Metal Fabricating Areas-Include measures for maintaining clean, dry, orderly conditions in these areas. Use of dry clean-up techniques should be considered in the plan.
 - 3.2.3.3.2 Storage Areas for Raw Metal-Include measures to keep these areas free of conditions that could cause spills or leakage of materials. Storage areas should be maintained for easy access in case spill clean-up is necessary. Stored materials should be able to be identified correctly and quickly.
 - 3.2.3.3.3 Receiving, Unloading, and Storage Areas-Include measures to prevent spills and leaks; plan for quick remedial clean-up and instruct employees on clean-up techniques and procedures.
 - 3.2.3.3.4 Storage of Equipment-Include measures for preparing equipment for storage and the proper method to store equipment including protecting with covers, storing indoors. The plan should include clean-up measures for equipment that will be stored outdoors to remove potential pollutants.
 - 3.2.3.3.5 Metal Working Fluid Storage Areas-The plan should include measures that identify controls particularly for storage of metal working fluids.
 - 3.2.3.3.6 Cleaners and Rinse Water-The plan should include measures to control and cleanup spills of solvents and other liquid cleaners; control sand buildup and disbursement from sand-blasting operations, prevent exposure of recyclable wastes; and employ substitute cleaners when possible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

- 3.2.3.3.7 Lubricating Oil and Hydraulic Fluid Operations-Consider using devices or monitoring equipment to detect and control leaks and overflows, including the installation of perimeter controls such as dikes, curbs, grass filter strips, or other equivalent measures.
- 3.2.3.3.8 Chemical Storage Areas-Identify proper storage that prevents stormwater contamination and prevents accidental spillage. The plan should include a program to inspect containers, and identify proper disposal and spill controls.

3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. Metal fabricators shall at a minimum include the following areas for inspection: raw metal storage areas, finished product storage areas, material and chemical storage areas, recycling areas, loading and unloading areas, equipment storage areas, paint areas, fueling and maintenance areas, and waste management areas. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping, and material management practices. The pollution prevention plan shall identify periodic dates for such training.

3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

3.2.3.7 Non-stormwater Discharges

3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with Part VII.G. of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph “Failure to Certify” (below).

- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division’s local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting a notice of intent to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion. The plan shall identify structural, vegetative, and/or stabilization measures to be used to limit erosion. These shall include but not be limited to grass swales, filter strips, treatment works, or other equivalent measures. Metal fabricators must include in their plan measures to minimize erosion related to the high volume of traffic from heavy equipment for delivery to and from the facility and for equipment operating at the facility on a daily basis such as forklifts, cranes, etc.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutant(s) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activities under the SIC codes identified under paragraph 11.AA.1. of this section shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at least once a year. Such evaluations shall include:
 - 3.2.4.1 Visual inspection of areas contributing to a stormwater discharge for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Inspection shall address areas associated with the storage of raw metals, storage of spent

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

solvents and chemicals, outdoor paint areas, drainage from roof, unloading and loading areas, equipment storage areas, recycling areas, and retention ponds (sludge). Potential pollutants include chromium, zinc, lubricating oil, solvents, aluminum, oil and grease, methyl ethyl ketone, steel, and other related materials. Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, such as detention basins and channels, gutters or drains to direct discharge flow, oil/water separators in storm drains, containment structures, concrete pads, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment and containment drums, shall be made to determine if the equipment is functioning properly and that drums are not in a corrosive or deteriorating state.

- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.AA.3.2.2 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.AA.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the inspection. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.AA.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Tables AA-1 and AA-2 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table AA-1. Benchmark Monitoring Requirements for Fabricated Metal Products Except SIC 3471-3479

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Aluminum	0.75
Total Recoverable Iron	5.0
Total Recoverable Zinc	0.395
Nitrate plus Nitrite Nitrogen	0.68

Table AA-2. Benchmark Monitoring Requirements for Fabricated Metal Coating and Engraving (SIC 3471-3479)

Pollutants of Concern	Benchmark [mg/L]
Total Recoverable Zinc	0.395
Nitrate plus Nitrite Nitrogen	0.68

5.1.1 Monitoring Periods. Metal fabricating facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark), a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in areas of the facility which drains to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.4 **Representative Discharge.** When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

5.1.5 **Alternative Certification.** A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 **Reporting**

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

- 5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.
- 5.3.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
- 5.3.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AA

- 5.3.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

Sector AB - Stormwater Discharges Associated With Industrial Activity From Facilities That Manufacture Transportation Equipment, Industrial, or Commercial Machinery

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below. Common activities include: industrial plant yards; material handling sites; refuse sites; sites used for application or disposal of process wastewaters; sites used for storage and maintenance of material handling equipment; sites used for residual treatment, storage, or disposal; shipping and receiving areas; manufacturing buildings; storage areas for raw material and intermediate and finished products; and areas where industrial activity has taken place in the past and significant materials remain and are exposed to stormwater.

SIC Code	Sector AB: Facilities That Manufacture Transportation Equipment, Industrial or Commercial Machinery	Sampling Required?	Table Number
3511	Steam, Gas, and Hydraulic Turbines, and Turbine Generator Set Units	Yes	AB-1
3519	Internal Combustion Engines, NEC	Yes	AB-1
3523	Farm Machinery and Equipment	Yes	AB-1
3524	Lawn and Garden Tractors and Home Lawn and Garden Equipment	Yes	AB-1
3531	Construction Machinery and Equipment	Yes	AB-1
3532	Mining Machinery and Equipment, Except Oil and Gas Field Machinery and Equipment	Yes	AB-1
3533	Oil and Gas Field Machinery and Equipment	Yes	AB-1
3534	Elevators and Moving Stairways	Yes	AB-1
3535	Conveyors and Conveying Equipment	Yes	AB-1
3536	Overhead Traveling Cranes, Hoists and Monorail Systems	Yes	AB-1
3537	Industrial Trucks, Tractors, Trailers, and Stackers	Yes	AB-1
3541	Machine Tools, Metal Cutting Type	Yes	AB-1
3542	Machine Tools, Metal Forming Type	Yes	AB-1
3543	Industrial Patterns	Yes	AB-1
3544	Special Dies and Tools, Die Sets, Jigs and Fixtures, and Industrial Molds	Yes	AB-1
3545	Cutting Tools, Machine Tool Accessories, and Machinists' Precision Measuring Devices	Yes	AB-1
3546	Power-Driven Handtools	Yes	AB-1
3547	Rolling Mill Machinery and Equipment	Yes	AB-1
3548	Electric and Gas Welding and Soldering Equipment	Yes	AB-1
3549	Metalworking Machinery, NEC	Yes	AB-1
3552	Textile Machinery	Yes	AB-1
3553	Woodworking Machinery	Yes	AB-1
3554	Paper Industries Machinery	Yes	AB-1
3555	Printing Trades Machinery and Equipment	Yes	AB-1
3556	Food Products Machinery	Yes	AB-1
3559	Special Industry Machinery, NEC	Yes	AB-1
3561	Pumps and Pumping Equipment	Yes	AB-1
3562	Ball and Roller Bearings	Yes	AB-1
3563	Air and Gas Compressors	Yes	AB-1
3564	Industrial and Commercial Fans and Blowers and Air Purification Equipment	Yes	AB-1
3565	Packaging Machinery	Yes	AB-1
3566	Speed Changers, Industrial High-Speed Drives, and Gears	Yes	AB-1
3567	Industrial Process Furnaces and Ovens	Yes	AB-1
3568	Mechanical Power Transmission Equipment, NEC	Yes	AB-1

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

SIC Code	Sector AB: Facilities That Manufacture Transportation Equipment, Industrial or Commercial Machinery	Sampling Required?	Table Number
3569	General Industrial Machinery and Equipment, NEC	Yes	AB-1
3581	Automatic Vending Machines	Yes	AB-1
3582	Commercial Laundry, Drycleaning, and Pressing Machines	Yes	AB-1
3585	Air-Conditioning and Warm Air Heating Equipment and Commercial and Industrial Refrigeration Equipment	Yes	AB-1
3586	Measuring and Dispensing Pumps	Yes	AB-1
3589	Service Industry Machinery, NEC	Yes	AB-1
3592	Carburetors, Pistons, Piston Rings and Valves	Yes	AB-1
3593	Fluid Power Cylinders and Actuators	Yes	AB-1
3594	Fluid Power Pumps and Motors	Yes	AB-1
3596	Scales and Balances, Except Laboratory	Yes	AB-1
3599	Industrial and Commercial Machinery and Equipment, NEC	Yes	AB-1
3711	Motor Vehicles and Passenger Car Bodies	Yes	AB-1
3713	Truck and Bus Bodies	Yes	AB-1
3714	Motor Vehicle Parts and Accessories	Yes	AB-1
3715	Truck Trailers	Yes	AB-1
3716	Motor Homes	Yes	AB-1
3721	Aircraft	Yes	AB-1
3724	Aircraft Engines and Engine Parts	Yes	AB-1
3728	Aircraft Parts and Auxiliary Equipment, NEC	Yes	AB-1
3743	Railroad Equipment	Yes	AB-1
3751	Motorcycles, Bicycles, and Parts	Yes	AB-1
3761	Guided Missiles and Space Vehicles	Yes	AB-1
3764	Guided Missile and Space Vehicle Propulsion Units and Propulsion Unit Parts	Yes	AB-1
3769	Guided Missile Space Vehicle Parts and Auxiliary Equipment, NEC	Yes	AB-1
3792	Travel Trailers and Campers	Yes	AB-1
3795	Tanks and Tank Components	Yes	AB-1
3799	Transportation Equipment, NEC	Yes	AB-1

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

- 3.2.1 Pollution Prevention Team. Each plan shall identify the specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.
- 3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:
- 3.2.2.1 Drainage. A site map indicating the pattern of stormwater drainage, existing structural control measures to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, and locations where major spills or leaks identified under Part 11.AB.3.2.2.3 (Spills and Leaks) of this permit have occurred since 3 years prior to the date of the submission of an NOI to be covered under this permit. The map must also indicate the locations of all industrial activities that are exposed to precipitation, including, but not limited to: loading/unloading areas; waste treatment; storage and disposal locations; liquid storage tanks; vents and stacks from metal processing and similar operations; significant dust or particulate generating areas; and any other processing and storage areas exposed to stormwater. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.
- For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for contacting significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants that are likely to present in stormwater discharges associated with industrial activity must be identified. Factors to consider include the toxicity of a chemical; quantity of chemicals used, produced, or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.
- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Significant spills include, but are not limited to, releases of oil or hazardous substances in excess of quantities that are reportable under Section 311 of CWA (see 40 CFR 110.10 and 117.21) or Section 102 of the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) (see 40 CFR 302.4). Significant spills may also include releases of oil or hazardous substances that are not excess of reporting requirements and releases of materials that are not classified as oil or hazardous substance. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; significant dust or particulate generating processing activities; and onsite waste disposal. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., oil and grease, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner. Areas where good housekeeping practices should be implemented are storage areas for raw materials, waste materials and finished products; loading/unloading areas; and waste disposal areas for hazardous and nonhazardous wastes. Examples of good housekeeping measures include sweeping; labeling drums containing hazardous materials; and preventive monitoring practices (e.g., routine observation of manufacturing processes) or equivalent measures.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Areas to be identified should include loading/unloading areas, outdoor storage areas, and waste management areas exposed to stormwater. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility on a periodic basis. At a minimum, the following areas, where the potential for exposure to stormwater exists, must be inspected on a regularly scheduled basis: loading and unloading areas for all significant materials; storage areas, including associated containment areas; waste management units; and vents and stacks from industrial activities. For any problems identified during inspections, the plan shall be revised to include measures to address these problems. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping, material management practices, unloading/loading practices, outdoor storage areas, waste management practices, proper handling procedures of hazardous waste, and improper connections to the storm sewer. At a minimum, this training should be provided annually. The pollution prevention plan shall identify frequencies and approximate dates for such training.

- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan. Ineffective BMPs should be reported and the date of their corrective actions noted.

- 3.2.3.7 Non-stormwater Discharges

- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges as identified in Part III.A.2. of this permit. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with the below subsection Failure to Certify of this permit.

- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).

If the facility discharges wastewater, other than stormwater via an existing NPDES permit, a copy of the NPDES permit authorizing the discharge must be attached to the plan. Similarly, if the facility submitted an application for an NPDES permit for non-stormwater discharges, but has not yet received that permit, a copy of the permit application must be attached. Upon issuance or reissuance of an NPDES permit, the facility must modify its plan to include a copy of that permit. For facilities that discharge wastewater, other than solely domestic wastewater, to a Publicly Owned Treatment Works (POTW), the facility must notify the POTW of its discharge. Proof of this notification should be attached to the plan in the form of either 1) a copy of the permit issued by the treatment plant to the facility or 2) a copy of a notification letter to the POTW. Notification should identify, in general, the types of wastewater discharged to the POTW, including any stormwater discharges. In any of these cases, specific permit conditions must be considered in the plan.

- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by Not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity (see paragraph 11.AB.3.2.2 (Description of Potential Pollutant Sources) of this permit) shall be considered when determining reasonable and appropriate measures. Appropriate measures or

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

other equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices. In addition, the permittee must describe the stormwater pollutant source area or activity (storage areas, loading/unloading) to be controlled by each stormwater management practice.

- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at appropriate intervals specified in the SWPPP, but in no case less than once a year. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
 - 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with Part 11.AB.3.2.2 (Description of Potential Pollutant Sources) of this permit and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.AB.3.2.3 Measures and Controls) of this permit shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
 - 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the inspection, the date(s) of the inspection, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years after the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
 - 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.AB3.2.3.4 the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table N-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table AB-1. Benchmark Monitoring Requirements for Facilities That Manufacture Transportation Equipment, Industrial, or Commercial Machinery

Pollutants of Concern	Benchmark [mg/L]
Total Suspended Solids (TSS)	150
Oil and Grease (O/G)	15

5.1.1 **Monitoring Periods.** Scrap recycling and waste recycling facilities (non-source separated only) shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 **Sample Type.** A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or non-process water, then where practicable, permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

- 5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (e.g., drought, extended frozen conditions, etc.).
- 5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark), a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in the area of the facility which drains to the outfall for which sampling was waived.
- 5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

- 5.1.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.
- 5.1.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of the monitoring reports required under paragraph b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity, that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph b. below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

- 5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a representative stormwater discharge associated with industrial activity exposed to stormwater. The examination must be made at least once each quarter during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event. Examinations must be conducted at least once in each of the following periods: January through March; April through June; July through September; and October through December.
- 5.3.1 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3.2 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.3.3 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.4 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain the documentation on-site with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.5 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AB

as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AC

Sector AC - Stormwater Discharges Associated With Industrial Activity From Facilities That Manufacture Electronic and Electrical Equipment and Components, Photographic and Optical Goods

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from a facility engaged in manufacturing the following products and generally described by the SIC codes shown below:

SIC Code	Sector AC: Facilities That Manufacture Electronic and Electrical Equipment and Components, Photographic and Optical Goods	Sampling Required?	Table Number
3571	Electronic Computers	No	--
3572	Computer Storage Devices	No	--
3575	Computer Terminals	No	--
3577	Computer Peripheral Equipment, NEC	No	--
3578	Calculating and Accounting Machines, Except Electronic Computers	No	--
3579	Office Machines, NEC	No	--
3612	Power, Distribution, and Specialty Transformers	No	--
3613	Switchgear and Switchboard Apparatus	No	--
3621	Motors and Generators	No	--
3624	Carbon and Graphite Products	No	--
3625	Relays and Industrial Controls	No	--
3629	Electrical Industrial Apparatus, NEC	No	--
3631	Household Cooking Equipment	No	--
3632	Household Refrigerators and Home and Farm Freezers	No	--
3633	Household Laundry Equipment	No	--
3634	Electric Housewares and Fans	No	--
3635	Household Vacuum Cleaners	No	--
3639	Household Appliances, NEC	No	--
3641	Electric Lamp Bulbs and Tubes	No	--
3643	Current-Carrying Wiring Devices	No	--
3644	Noncurrent-Carrying Wiring Devices	No	--
3645	Residential Electric Lighting Fixtures	No	--
3646	Commercial, Industrial, and Institutional Electric Lighting Fixtures	No	--
3647	Vehicular Lighting Equipment	No	--
3648	Lighting Equipment, NEC	No	--
3651	Household Audio and Video Equipment	No	--
3652	Phonograph Records and Prerecorded Audio Tapes and Disks	No	--
3661	Telephone and Telegraph Apparatus	No	--
3663	Radio and Television Broadcasting and Communication Equipment	No	--
3669	Communications Equipment, NEC	No	--
3671	Electron Tubes	No	--
3672	Printed Circuit Boards	No	--
3674	Semiconductors and Related Devices	No	--
3675	Electronic Capacitors	No	--
3676	Electronic Resistors	No	--
3677	Electronic Coils, Transformers, and Other Inductors	No	--
3678	Electronic Connectors	No	--
3679	Electronic Components, NEC	No	--
3691	Storage Batteries	No	--
3692	Primary Batteries, Dry and Wet	No	--
3694	Electrical Equipment for Internal Combustion Engines	No	--
3695	Magnetic and Optical Recording Media	No	--
3699	Electrical Machinery, Equipment, and Supplies, NEC	No	--

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AC

SIC Code	Sector AC: Facilities That Manufacture Electronic and Electrical Equipment and Components, Photographic and Optical Goods	Sampling Required?	Table Number
3812	Search, Detection, Navigation, Guidance, Aeronautical, and Nautical Systems and Instruments	No	--
3821	Laboratory Apparatus and Furniture	No	--
3822	Automatic Controls for Regulating Residential and Commercial Environments and Appliances	No	--
3823	Industrial Instruments for Measurement, Display, and Control of Process Variables; and Related Products	No	--
3824	Totalizing Fluid Meters and Counting Devices	No	--
3825	Instruments for Measuring and Testing of Electricity and Electrical Signals	No	--
3826	Laboratory Analytical Instruments	No	--
3827	Optical Instruments and Lenses	No	--
3829	Measuring and Controlling Devices, NEC	No	--
3841	Surgical and Medical Instruments and Apparatus	No	--
3842	Orthopedic, Prosthetic, and Surgical Appliances and Supplies	No	--
3843	Dental Equipment and Supplies	No	--
3844	X-Ray Apparatus and Tubes and Related Irradiation Apparatus	No	--
3845	Electromedical and Electrotherapeutic Apparatus	No	--
3851	Ophthalmic Goods	No	--
3861	Photographic Equipment and Supplies	No	--
3873	Watches, Clocks, Clockwork Operated Devices and Parts	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. The plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AC

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all activities and significant materials which may potentially be significant pollutant sources. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, locations where major spills or leaks identified under Part 11.AC.3.2.2.3 (Spills and Leaks) of this permit have occurred, and the locations of the following activities where such activities are exposed to precipitation: fueling stations, vehicle and equipment maintenance and/or cleaning areas, loading/unloading areas, locations used for the treatment, storage or disposal of wastes, liquid storage tanks, processing areas and storage areas. The map must indicate the outfall locations and the types of discharges contained in the drainage areas of the outfalls.

For each area of the facility that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. Flows with a significant potential for causing erosion shall be identified.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.

3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AC

- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations; outdoor storage activities; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical oxygen demand, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.
- 3.2.3.2 Preventive Maintenance - A preventive maintenance program shall involve timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which can contribute pollutants to stormwater discharges can occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - In addition to or as part of the comprehensive site evaluation required under this section, qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.
- Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.
- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping and material management practices. The pollution prevention

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AC

plan shall identify periodic dates for such training.

- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).
- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting an NOI to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion, and identify structural, vegetative, and/or stabilization measures to be used to limit erosion.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AC

generation or source(s) of pollutants) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activity [see paragraph 11.AC.3.2.2 of this section (Description of Potential Pollutant Sources)] shall be considered when determining reasonable and appropriate measures. Appropriate measures or equivalent measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.

- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations once a year. Such evaluations shall provide:
 - 3.2.4.1 Areas contributing to a stormwater discharge associated with industrial activity shall be visually inspected for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment, shall be made.
 - 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.AC.3.2.2 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.AC.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
 - 3.2.4.3 A report summarizing the scope of the inspection, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the evaluation. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.
 - 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.AC.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
- 5.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for Each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AC

- drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AD

Sector AD - Stormwater Discharges Associated With Industrial Activity From Facilities That Are Not Covered Under Sectors A Thru AC

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from those facilities that are not covered for such discharges under Sectors A thru AC. It is the intent of the Division that this Sector includes those stormwater discharges which are not covered under Sectors A thru AC, as well as those facilities which had no previous stormwater permit that are applying for the first time and will not be covered under Sectors A thru AC.

SIC Code	Sector AD: Facilities That Are Not Covered Under Sectors A Thru AC (Monitoring Required)	Sampling Required?	Table Number
N/A	Nonclassifiable Establishments	Yes	AD-1

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. If the facility was previously permitted and subject to the TMSP's stormwater pollution prevention plan requirements, the permittee may substitute its current stormwater pollution prevention plan for the one required below, provided it meets the minimum requirements of the following plan; otherwise, the plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AD

identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all industrial activities and significant materials which may potentially be significant pollutant sources. Each plan shall specifically identify the physical features of the facility that may contribute to stormwater runoff. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating the outfall locations and types of discharges contained in the drainage areas of the outfalls, an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, and locations where major spills or leaks identified under Part 11.AD.3.2.2.3 (Spills and Leaks) of this permit have occurred.

For each area of the facilities that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. In addition, flows with a significant potential for causing erosion shall be identified such as heavy equipment use areas, drainage from roofs, parking lots, etc.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.

3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AD

- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations, chemicals and raw materials; outdoor storage activities for raw materials; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical or chemical oxygen demand, chromium, total suspended solids, oil and grease, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.
- 3.2.3.2 Preventive Maintenance - Preventive maintenance measures shall include timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which could contribute pollutants to stormwater discharges may occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. The plan should be considered where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.
- Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.
- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AD

response, good housekeeping, and material management practices. The pollution prevention plan shall identify periodic dates for such training.

- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).
- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting a notice of intent to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion. The plan shall identify structural, vegetative, and/or stabilization measures to be used to limit erosion. These shall include but not be limited to grass swales, filter strips, treatment works, or other equivalent measures.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AD

- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutant(s) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activities under the SIC codes identified under paragraph XI.AD.1. of this section shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at least once a year. Such evaluations shall include:
- 3.2.4.1 Visual inspection of areas contributing to a stormwater discharge for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Inspection shall address areas associated with the storage of raw metals, storage of spent solvents and chemicals, drainage from roof, unloading and loading areas, equipment storage areas, recycling areas, and retention ponds (sludge). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, such as detention basins and channels, gutters or drains to direct discharge flow, oil/water separators in storm drains, containment structures, concrete pads, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment and containment drums, shall be made to determine if the equipment is functioning properly and that drums are not in a corrosive or deteriorating state.
- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.AD.3.2.2 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.AD.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with the permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the inspection. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AD

3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.AC.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). For SIC-specific breakdown of monitoring requirements and applicable Monitoring Requirements (listed below), see Table in Part 1 of this industrial sector (1. Discharges Covered Under This Section). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table AD-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table AD-1. Benchmark Monitoring Requirements

Pollutants of Concern	Benchmark [mg/L]
Biochemical Oxygen Demand (BOD5)	30
Chemical Oxygen Demand (COD)	120
Total Suspended Solids	150
Ammonia as Nitrogen	4
Oil and Grease	15
pH	5.0 - 9.0

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AD

- 5.1.1 Monitoring Periods. Facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.
- 5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

- 5.1.3 Sampling Waiver
- 5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AD

(such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

- 5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark), a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in areas of the facility which drain to the outfall for which sampling was waived.
- 5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.
- 5.1.3.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.
- 5.1.3.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AD

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

5.3 Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

5.3.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.

5.3.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.

5.3.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.

5.3.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AD

- and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.3.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.3.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AE

Sector AE - Stormwater Discharges Associated With Industrial Activity From Facilities That Are Not Covered Under Sectors A Thru AC (Monitoring Not Required)

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from those facilities that are not covered for such discharges under Sectors A thru AC, but due to nature of manufacturing or industrial process at a site, do not require analytical monitoring of stormwater runoff. It is the intent of the Division that this Sector include those stormwater discharges which are not covered under Sectors A thru AC, as well as those facilities which had no previous stormwater permit that are applying for the first time and will not be covered under Sectors A thru AC.

SIC Code	Sector AE: Facilities That Are Not Covered Under Sectors A Thru AC (Monitoring Not Required)	Sampling Required?	Table Number
N/A	Nonclassifiable Establishments	No	--

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. If the facility was previously permitted and subject to the TMSP's stormwater pollution prevention plan requirements, the permittee may substitute its current stormwater pollution prevention plan for the one required below, provided it meets the minimum requirements of the following plan; otherwise, the plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AE

identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all industrial activities and significant materials which may potentially be significant pollutant sources. Each plan shall specifically identify the physical features of the facility that may contribute to stormwater runoff. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating the outfall locations and types of discharges contained in the drainage areas of the outfalls, an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, and locations where major spills or leaks identified under Part 11.AE.3.2.2.3 (Spills and Leaks) of this permit have occurred.

For each area of the facilities that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. In addition, flows with a significant potential for causing erosion shall be identified such as heavy equipment use areas, drainage from roofs, parking lots, etc.

3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.

3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.

3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AE

- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations, chemicals and raw materials; outdoor storage activities for raw materials; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., biochemical or chemical oxygen demand, chromium, total suspended solids, oil and grease, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
- 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.
- 3.2.3.2 Preventive Maintenance - Preventive maintenance measures shall include timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins, repairing silt fences, cleaning check dams and sediment basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
- 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which could contribute pollutants to stormwater discharges may occur, and their accompanying drainage points shall be identified clearly in the stormwater pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.
- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility at appropriate intervals specified in the SWPPP. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.
- Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.
- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AE

response, good housekeeping, and material management practices. The pollution prevention plan shall identify periodic dates for such training.

- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.
- 3.2.3.7 Non-stormwater Discharges
- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).
- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs on page 14).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting a notice of intent to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion. The plan shall identify structural, vegetative, and/or stabilization measures to be used to limit erosion. These shall include but not be limited to grass swales, filter strips, treatment works, or other equivalent measures.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AE

- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutant(s) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site. The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. The potential of various sources at the facility to contribute pollutants to stormwater discharges associated with industrial activities under the SIC codes identified under paragraph 11.AE.1. of this section shall be considered when determining reasonable and appropriate measures. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as oil/water separators), snow management activities, infiltration devices, and wet detention/retention devices.
- 3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at least once a year. Such evaluations shall include:
- 3.2.4.1 Visual inspection of areas contributing to a stormwater discharge for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Inspection shall address areas associated with the storage of raw metals, storage of spent solvents and chemicals, drainage from roof, unloading and loading areas, equipment storage areas, recycling areas, and retention ponds (sludge). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, such as detention basins and channels, gutters or drains to direct discharge flow, oil/water separators in storm drains, containment structures, concrete pads, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment and containment drums, shall be made to determine if the equipment is functioning properly and that drums are not in a corrosive or deteriorating state.
- 3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.AE.3.2.2 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.AE.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.
- 3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the inspection. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AE

- 3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.AE.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Numeric Effluent Limitations described in subpart 5.2 above (Coal Pile Runoff) must submit to the division monitoring results annually on a signed copy of the Discharge Monitoring Report (DMR, see Addendum E).

Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

- 5.1 Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.
- 5.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AE

- and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for Each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible

Sector AF - Stormwater Discharges Associated With Industrial Activity From Borrow Pits, Soil Harvesting Sites and Spoil Piles

1. Discharges Covered Under This Section

The requirements listed under this section shall apply to stormwater discharges associated with industrial activity from borrow pits, soil harvesting sites and spoil piles. Borrow pits and soil harvesting sites are terms used in construction and civil engineering. They generally describe areas where soil is being dug for use at another location. Spoil piles are excavated materials consisting of topsoil or subsoils that have been removed and temporarily stored during the construction activity.

This sector does not apply to stormwater discharges associated with industrial activity from construction sand and gravel mining and processing and dimension stone mining and quarrying facilities (see Sector J). This sector does not apply to stormwater discharges from support activities associated with a permitted construction site (e.g., concrete or asphalt batch plants, equipment staging yards, material storage areas, excavated material disposal areas, borrow areas) provided all of the following are met:

- a) the support activity is primarily related to a construction site that is covered under the separate construction general permit;
- b) the operator of the support activity is the same as the operator of the construction site;
- c) the support activity is not a commercial operation serving multiple unrelated construction projects by different operators;
- d) the support activity does not operate beyond the completion of the construction activity of the last construction project it supports; and
- e) support activities are identified at the time the coverage under the General Permit for Stormwater Associated with Construction Activities was obtained.

SIC Code	Sector AF: Stormwater Discharges Associated With Industrial Activity from Borrow Pits	Sampling Required?	Table Number
N/A	Nonclassifiable Establishments	Yes	AF-1

When an industrial facility, described by the above coverage provisions of this section, has industrial activities being conducted onsite that meet the description(s) of industrial activities in another section(s), that industrial facility shall comply with any and all applicable monitoring and pollution prevention plan requirements of the other section(s) in addition to all applicable requirements in this section. The monitoring and pollution prevention plan terms and conditions of this multi-sector permit are additive for industrial activities being conducted at the same industrial facility (co-located industrial activities). The operator of the facility shall determine which other monitoring and pollution prevention plan section(s) of this permit (if any) are applicable to the facility.

2. Special Conditions

Prohibition of Non-stormwater Discharges. Except for those allowable non-stormwater discharges included in Part 3.1.2 (Allowable Non-Stormwater Discharges) of this permit, there are no other non-stormwater discharges authorized in this Sector.

3. Stormwater Pollution Prevention Plan Requirements

3.1 Deadlines for Plan Preparation and Compliance. There are no additional deadlines for plan preparation and compliance, other than those stated in subpart 4.1.

3.2 Contents of Plan. If the facility was previously permitted and subject to the TMSP's stormwater pollution prevention plan requirements, the permittee may substitute its current stormwater pollution prevention plan for the one required below, provided it meets the minimum requirements of the following plan; otherwise, the plan shall include, at a minimum, the following items:

3.2.1 Pollution Prevention Team. Each plan shall identify a specific individual or individuals within the facility organization as members of a stormwater Pollution Prevention Team that are responsible for developing the stormwater pollution prevention plan and assisting the facility or plant manager in its implementation, maintenance, and revision. The plan shall clearly identify the responsibilities of each team member. The activities and responsibilities of the team shall address all aspects of the facility's stormwater pollution prevention plan.

3.2.2 Description of Potential Pollutant Sources. Each plan shall provide a description of potential sources which may reasonably be expected to add significant amounts of pollutants to stormwater discharges or which may result in the discharge of pollutants during dry weather from separate storm sewers draining the facility. Each plan shall identify all industrial activities and significant materials which may potentially be significant pollutant sources. Each plan shall specifically identify the physical features of the facility that may contribute to stormwater runoff. Each plan shall include, at a minimum:

3.2.2.1 Drainage. A site map indicating the outfall locations and types of discharges contained in the drainage areas of the outfalls, an outline of the portions of the drainage area of each stormwater outfall that are within the facility boundaries, each existing structural control measure to reduce pollutants in stormwater runoff, surface water bodies, locations where significant materials are exposed to precipitation, and locations where major spills or leaks identified under Part 11.AF.3.2.2.3 (Spills and Leaks) of this permit have occurred.

For each area of the facilities that generates stormwater discharges associated with industrial activity with a reasonable potential for containing significant amounts of pollutants, the plan should include a prediction of the direction of flow, and an identification of the types of pollutants which are likely to be present in stormwater discharges associated with industrial activity. Factors to consider include the toxicity of chemical; quantity of chemicals used, produced or discharged; the likelihood of contact with stormwater; and history of significant leaks or spills of toxic or hazardous pollutants. In addition, flows with a significant potential for causing erosion shall be identified such as heavy equipment use areas, drainage from roofs, parking lots, etc.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AF

- 3.2.2.2 Inventory of Exposed Materials - An inventory of the types of materials handled at the site that potentially may be exposed to precipitation. Such inventory shall include a narrative description of significant materials that have been handled, treated, stored or disposed in a manner to allow exposure to stormwater between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; method and location of onsite storage or disposal; materials management practices employed to minimize contact of materials with stormwater runoff between the time of 3 years prior to the date of the submission of an NOI to be covered under this permit and the present; the location and a description of existing structural and nonstructural control measures to reduce pollutants in stormwater runoff; and a description of any treatment the stormwater receives.
- 3.2.2.3 Spills and Leaks - A list of significant spills and significant leaks of toxic or hazardous pollutants that occurred at areas that are exposed to precipitation or that otherwise drain to a stormwater conveyance at the facility after the date of 3 years prior to the date of the submission of an NOI to be covered under this permit. Such list shall be updated as appropriate during the term of the permit.
- 3.2.2.4 Sampling Data - A summary of existing discharge sampling data describing pollutants in stormwater discharges from the facility, including a summary of sampling data collected during the term of this permit.
- 3.2.2.5 Risk Identification and Summary of Potential Pollutant Sources - A narrative description of the potential pollutant sources from the following activities: loading and unloading operations, chemicals and raw materials; outdoor storage activities for raw materials; outdoor manufacturing or processing activities; significant dust or particulate generating processes; and onsite waste disposal practices. The description shall specifically list any significant potential source of pollutants at the site and for each potential source, any pollutant or pollutant parameter (e.g., total suspended solids, oil and grease, etc.) of concern shall be identified.
- 3.2.3 Measures and Controls. Each facility covered by this permit shall develop a description of stormwater management controls appropriate for the facility, and implement such controls. The appropriateness and priorities of controls in a plan shall reflect identified potential sources of pollutants at the facility. The description of stormwater management controls shall address the following minimum components, including a schedule for implementing such controls:
 - 3.2.3.1 Good Housekeeping - Good housekeeping requires the maintenance of areas which may contribute pollutants to stormwater discharges in a clean, orderly manner.
 - 3.2.3.2 Preventive Maintenance - Preventive maintenance measures shall include timely inspection and maintenance of stormwater management devices (e.g., cleaning oil/water separators, catch basins, repairing silt fences, cleaning check dams and sediment basins) as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters, and ensuring appropriate maintenance of such equipment and systems.
 - 3.2.3.3 Spill Prevention and Response Procedures - Areas where potential spills which could contribute pollutants to stormwater discharges may occur, and their accompanying drainage points shall

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AF

be identified clearly in the stormwater pollution prevention plan. Where appropriate, specifying material handling procedures, storage requirements, and use of equipment such as diversion valves in the plan should be considered. Procedures for cleaning up spills shall be identified in the plan and made available to the appropriate personnel. The necessary equipment to implement a clean-up should be available to personnel.

- 3.2.3.4 Inspections - Qualified facility personnel shall be identified to inspect designated equipment and areas of the facility (including, but not limited to Erosion Prevention and Sediment Control practices as described in paragraph 3.2.3.7.4 below) at appropriate intervals specified in the SWPPP. A set of tracking or follow-up procedures shall be used to ensure that appropriate actions are taken in response to the inspections. Records of inspections shall be maintained as part of the SWPPP. The use of a checklist developed by the facility is encouraged.

Note that additional Stormwater Pollution Prevention Plan (SWPPP) requirements for discharges into waters with unavailable parameters or Exceptional Tennessee waters, as described in the subpart 4.6 of this permit may be applicable to your facility.

- 3.2.3.5 Employee Training - Employee training programs shall inform personnel responsible for implementing activities identified in the stormwater pollution prevention plan or otherwise responsible for stormwater management at all levels of responsibility of the components and goals of the stormwater pollution prevention plan. Training should address topics such as spill response, good housekeeping, and material management practices. The pollution prevention plan shall identify periodic dates for such training.

- 3.2.3.6 Recordkeeping and Internal Reporting Procedures - A description of incidents (such as spills, or other discharges), along with other information describing the quality and quantity of stormwater discharges shall be included in the plan required under this part. Inspections and maintenance activities shall be documented and records of such activities shall be incorporated into the plan.

- 3.2.3.7 Non-stormwater Discharges

- 3.2.3.7.1 The plan shall include a certification that the discharge has been tested or evaluated for the presence of non-stormwater discharges. The certification shall include the identification of potential significant sources of non-stormwater at the site, a description of the results of any test and/or evaluation for the presence of non-stormwater discharges, the evaluation criteria or testing method used, the date of any testing and/or evaluation, and the onsite drainage points that were directly observed during the test. Certifications shall be signed in accordance with subpart 7.7 of this permit. Such certification may not be feasible if the facility operating the stormwater discharge associated with industrial activity does not have access to an outfall, manhole, or other point of access to the ultimate conduit which receives the discharge. In such cases, the source identification section of the stormwater pollution prevention plan shall indicate why the certification required by this part was not feasible, along with the identification of potential significant sources of non-stormwater at the site. A discharger that is unable to provide the certification required by this paragraph must notify the Division of Water Resources in accordance with paragraph "Failure to Certify" (below).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AF

- 3.2.3.7.2 Sources of non-stormwater that are combined with stormwater discharges associated with industrial activity must be identified in the plan. The plan shall identify and ensure the implementation of appropriate pollution prevention measures for the non-stormwater component(s) of the discharge. Any non-stormwater discharges that are not authorized under this permit or another NPDES permit should be brought to the attention of the division's local Environmental Field Office (see list of EFOs under subpart 3.3 on page 14 of this permit).
- 3.2.3.7.3 Failure to Certify - Any facility that is unable to provide the certification required (testing for non-stormwater discharges), must notify the Division of Water Resources by not later than 180 days after submitting a notice of intent to be covered by this permit. If the failure to certify is caused by the inability to perform adequate tests or evaluations, such notification shall describe: the procedure of any test conducted for the presence of non-stormwater discharges; the results of such test or other relevant observations; potential sources of non-stormwater discharges to the storm sewer; and why adequate tests for such storm sewers were not feasible. Non-stormwater discharges to waters of the state which are not authorized by an NPDES permit are unlawful, and must be terminated.
- 3.2.3.7.4 Sediment and Erosion Control - The plan shall identify areas which, due to topography, activities, or other factors, have a high potential for significant soil erosion. The plan shall identify structural, vegetative, and/or stabilization measures to be used to limit erosion. Appropriate measures may include: silt fences, earth dikes, gradient terraces, drainage swales, sediment traps, check dams, pipe slope drains, level spreaders, storm drain inlet protection, rock outlet protection, reinforced soil retaining systems, gabions and temporary or permanent sediment basins, or other equivalent measures. The description of controls shall address the following minimum components:
- A description of vegetative practices designed to preserve existing vegetation where attainable and revegetate open areas as soon as practicable after grade drilling. Such practices may include: temporary seeding, permanent seeding, mulching, sod stabilization, vegetative buffer strips, protection of trees, or other equivalent measures. The operator shall initiate appropriate vegetative practices on all completed at-grade areas within 14 calendar days of completion.
 - A description of structural practices that, to the degree attainable, divert flows from exposed soils, store flows or otherwise limit runoff from exposed areas of the site. Such practices may include straw bale dikes, silt fences, earth dikes, brush barriers, drainage swales, check dams, subsurface drain, pipe slope drain, level spreaders storm drain inlet protection, rock outlet protection, sediment traps, temporary sediment basins, or other equivalent measures.
 - Offsite vehicle tracking of sediments and dust generation shall be minimized.
 - Procedures in a plan shall provide that all erosion controls on the site are inspected at least once every 7 calendar days. Weekly inspections are necessary to ensure erosion controls continue to effectively reduce the amount of sediment carried offsite. A silt fence or silt trap is no longer effective when filled with silt.
- 3.2.3.7.5 Management of Runoff - The plan shall contain a narrative consideration of the appropriateness of traditional stormwater management practices (practices other than those which control the generation or source(s) of pollutant(s) used to divert, infiltrate, reuse, or otherwise manage stormwater runoff in a manner that reduces pollutants in stormwater discharges from the site.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AF

The plan shall provide that measures that the permittee determines to be reasonable and appropriate shall be implemented and maintained. Appropriate measures may include: vegetative swales and practices, reuse of collected stormwater (such as for a process or as an irrigation source), inlet controls (such as fabric barriers, sandbags, block and gravel protection), snow management activities, infiltration devices, and wet detention/retention devices.

3.2.4 Comprehensive Site Compliance Evaluation. Qualified personnel shall conduct site compliance evaluations at least once a year. Such evaluations shall include:

3.2.4.1 Visual inspection of areas contributing to a stormwater discharge for evidence of, or the potential for, pollutants entering the drainage system (and potentially waters of the state). Inspection shall address areas associated with the storage of raw metals, storage of spent solvents and chemicals, drainage from roof, unloading and loading areas, equipment storage areas, recycling areas, and retention ponds (sludge). Measures to reduce pollutant loadings shall be evaluated to determine whether they are adequate and properly implemented in accordance with the terms of the permit or whether additional control measures are needed. Structural stormwater management measures, such as detention basins and channels, gutters or drains to direct discharge flow, oil/water separators in storm drains, containment structures, concrete pads, sediment and erosion control measures, and other structural pollution prevention measures identified in the plan shall be observed to ensure that they are operating correctly. A visual inspection of equipment needed to implement the plan, such as spill response equipment and containment drums, shall be made to determine if the equipment is functioning properly and that drums are not in a corrosive or deteriorating state.

3.2.4.2 Based on the results of the evaluation, the description of potential pollutant sources identified in the plan in accordance with paragraph 11.AF.3.2.2 of this section (Description of Potential Pollutant Sources) and pollution prevention measures and controls identified in the plan in accordance with paragraph 11.AF.3.2.3 of this section (Measures and Controls) shall be revised as appropriate within 2 weeks of such evaluation and shall provide for implementation of any changes to the plan in a timely manner, but in no case more than 12 weeks after the evaluation.

3.2.4.3 A report summarizing the scope of the evaluation, personnel making the evaluation, the date(s) of the evaluation, major observations relating to the implementation of the stormwater pollution prevention plan, and actions taken in accordance with permit shall be made and retained as part of the stormwater pollution prevention plan for at least 3 years from the date of the inspection. The report shall identify any incidents of noncompliance. Where a report does not identify any incidents of noncompliance, the report shall contain a certification that the facility is in compliance with the stormwater pollution prevention plan and this permit. The report shall be signed in accordance with subpart 7.7 (Signatory Requirements) of this permit.

3.2.4.4 Where compliance evaluation schedules overlap with inspections required under 11.AE.3.2.3.4, the compliance evaluation may be conducted in place of one such inspection.

4. Numeric Effluent Limitations

There are no additional numeric effluent limitations beyond those described in subpart 5.2 (Coal Pile Runoff) of the TMSP.

5. Monitoring and Reporting Requirements

Permittees subject to Analytical Monitoring Requirements as described in subpart 5.1 of this sector (see below) must submit the benchmark results using an Annual Stormwater Monitoring Report (see Addendum D) to the division.

5.1 Analytical Monitoring Requirements

During the term of this permit, permittees covered under this sector must monitor their stormwater discharges associated with industrial activity at least once per calendar year (annually), except as provided in paragraphs 5.1.3 (Sampling Waiver), 5.1.4 (Representative Discharge), and 5.1.5 (Alternative Certification). Facilities must report in accordance with 5.2 (Reporting). In addition to the parameters listed in Table AF-1 below, the permittee shall maintain a record of the date and duration (in hours) of the storm event(s) sampled; rainfall measurements or estimates (in inches) of the storm event that generated the sampled runoff; the duration between the storm event sampled and the end of the previous measurable (greater than 0.1 inch rainfall) storm event; and an estimate of the total volume (in gallons) of the discharge sampled.

Table AF-1. Benchmark Monitoring Requirements

Pollutants of Concern	Benchmark [mg/L]
Total Suspended Solids	150

5.1.1 Monitoring Periods. Facilities shall monitor samples collected during any period of a calendar year, as long as the samples are representative of the quantity and quality of the stormwater runoff being discharged from the facility.

5.1.2 Sample Type. A minimum of one grab sample shall be taken. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. The required 72-hour storm event interval is waived where the preceding measurable storm event did not result in a measurable discharge from the facility. The required 72-hour storm event interval may also be waived where the permittee documents that less than a 72-hour interval is representative for local storm events during the season when sampling is being conducted. The grab sample shall be taken during the first 30 minutes of the discharge. If the collection of a grab sample during the first 30 minutes is impracticable, a grab sample can be taken during the first hour of the discharge, and the discharger shall submit with the monitoring report a description of why a grab sample during the first 30 minutes was impracticable. If stormwater discharges associated with industrial activity commingle with process or nonprocess water, then where practicable permittees must attempt to sample the stormwater discharge before it mixes with the non-stormwater discharge.

In addition, the permittee shall evaluate the results obtained from sampling and monitoring following the required annual sampling events to determine whether the facility is below, meets, or exceeds the monitoring benchmarks as shown in the table above. If the results of annual stormwater runoff monitoring demonstrate that the facility has exceeded the benchmark(s), the permittee must inform the division's local Environmental Field Office in writing within 30 days from the time stormwater monitoring results were received, describing

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AF

the likely cause of the exceedance(s). Furthermore, within 60 days from the time stormwater monitoring results were received, the facility must review its stormwater pollution prevention plan, make any modifications or additions to the plan which would assist in reducing effluent concentrations to less than the monitoring benchmarks for that facility, and submit to the division's local Environmental Field Office a brief summary of the proposed SWPPP modifications (including a timetable for implementation). The modification or additions to the SWPPP should be implemented as soon as practicable.

In the event of a repeated benchmark exceedance, the permittee can, in consultation with the division, make a determination that no further pollutant reduction is technologically available, economically practicable and achievable in light of best industry practices. The permittee must document the rationale for concluding that no further pollutant reductions are achievable, and retain all records related to this documentation with the SWPPP.

5.1.3 Sampling Waiver

5.1.3.1 Adverse Conditions - When a discharger is unable to collect samples within a specified sampling period due to adverse climatic conditions, the discharger shall collect a substitute sample from a separate qualifying event in the next period and submit the data along with data for the routine sample in that period. Adverse weather conditions that may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).

5.1.3.2 Low Concentration Waiver - When the average concentration for a pollutant calculated from monitoring data collected from first 4 calendar years of monitoring is less than the corresponding reporting value for that pollutant (Monitoring Benchmark), a facility may waive monitoring and reporting requirements in the last annual monitoring period. The facility must submit to the Division of Water Resources, in lieu of the monitoring data, a certification that there has not been a significant change in industrial activity or the pollution prevention measures in areas of the facility which drain to the outfall for which sampling was waived.

5.1.3.3 When a discharger is unable to conduct annual chemical stormwater sampling at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirements as long as the facility remains inactive and unstaffed. The facility must submit to the Division of Water Resources, in lieu of monitoring data, a certification statement on the TMSP Stormwater Monitoring Report stating that the site is inactive and unstaffed so that collecting a sample during a qualifying event is not possible.

5.1.3.4 Representative Discharge. When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may test the effluent of one of such outfalls and report that the quantitative data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for each outfall that the permittee believes is

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AF

representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan. The permittee shall include the description of the location of the outfalls, explanation of why outfalls are expected to discharge substantially identical effluents, and estimate of the size of the drainage area and runoff coefficient with the TMSP Stormwater Monitoring Report.

- 5.1.3.5 Alternative Certification. A discharger is not subject to the monitoring requirements of this section provided the discharger makes a certification for a given outfall or on a pollutant-by-pollutant basis in lieu of monitoring reports required under paragraph b below, under penalty of law, signed in accordance with subpart 7.7 (Signatory Requirements), that material handling equipment or activities, raw materials, intermediate products, final products, waste materials, by-products, industrial machinery or operations, or significant materials from past industrial activity that are located in areas of the facility within the drainage area of the outfall are not presently exposed to stormwater and are not expected to be exposed to stormwater for the certification period. Such certification must be retained in the stormwater pollution prevention plan, and submitted to the Division of Water Resources in accordance with subpart 6.2 of this permit. In the case of certifying that a pollutant is not present, the permittee must submit the certification along with the monitoring reports required under paragraph (b) below. If the permittee cannot certify for an entire period, they must submit the date exposure was eliminated and any monitoring required up until that date. This certification option is not applicable to compliance monitoring requirements associated with effluent limitations.

5.2 Reporting

Permittees with analytical monitoring requirements shall submit monitoring results for each outfall associated with industrial activity [or a certification in accordance with Sections (3), (4), or (5) above] obtained during the annual reporting period on TMSP Stormwater Monitoring Report Form(s). **The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year, whichever comes first.** For each outfall, one signed TMSP Stormwater Monitoring Report form must be submitted to the Division of Water Resources. Signed copies of TMSP Stormwater Monitoring Reports, or said certifications, shall be submitted to the division at the appropriate EFO for the county where the facility is located. A list of EFOs and their addresses are available in subpart 3.3 above.

Quarterly Visual Examination of Stormwater Quality. Facilities shall perform and document a visual examination of a stormwater discharge associated with industrial activity from each outfall, except discharges exempted below. The examination must be made at least once in each designated period [described in paragraph (1) below] during daylight hours unless there is insufficient rainfall or snow melt to produce a runoff event.

Examinations shall be conducted in each of the following periods for the purposes of visually inspecting stormwater quality associated with stormwater runoff or snowmelt: January through March; April through June; July through September; and October through December.

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Sector AF

- 5.2 Examinations shall be made of samples collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed 1 hour) of when the runoff or snowmelt begins discharging. The examinations shall document observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution. The examination must be conducted in a well-lit area. No analytical tests are required to be performed on the samples. All such samples shall be collected from the discharge resulting from a storm event that is greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable (greater than 0.1 inch rainfall) storm event. Where practicable, the same individual should carry out the collection and examination of discharges for the entire permit term.
- 5.3 Visual examination reports must be maintained onsite in the pollution prevention plan or with other compliance records. The report shall include the examination date and time, examination personnel, the nature of the discharge (i.e., runoff or snow melt), visual quality of the stormwater discharge (including observations of color, odor, clarity, floating solids, settled solids, suspended solids, foam, oil sheen, and other obvious indicators of stormwater pollution), and probable sources of any observed stormwater contamination.
- 5.4 When a facility has two or more outfalls that, based on a consideration of industrial activity, significant materials, and management practices and activities within the area drained by the outfall, the permittee reasonably believes discharge substantially identical effluents, the permittee may collect a sample of effluent of one of such outfalls and report that the examination data also applies to the substantially identical outfall(s) provided that the permittee includes in the stormwater pollution prevention plan a description of the location of the outfalls and explains in detail why the outfalls are expected to discharge substantially identical effluents. In addition, for Each outfall that the permittee believes is representative, an estimate of the size of the drainage area (in square feet) and an estimate of the runoff coefficient of the drainage area [e.g., low (under 40 percent), medium (40 to 65 percent), or high (above 65 percent)] shall be provided in the plan.
- 5.5 When a discharger is unable to collect samples over the course of the visual examination period as a result of adverse climatic conditions, the discharger must document the reason for not performing the visual examination and retain this documentation onsite with the records of the visual examinations. Adverse weather conditions which may prohibit the collection of samples include weather conditions that create dangerous conditions for personnel (such as local flooding, high winds, hurricane, tornadoes, electrical storms, etc.) or otherwise make the collection of a sample impracticable (drought, extended frozen conditions, etc.).
- 5.6 When a discharger is unable to conduct visual stormwater examinations at an inactive and unstaffed site, the operator of the facility may exercise a waiver of the monitoring requirement as long as the facility remains inactive and unstaffed. The facility must maintain a certification with the pollution prevention plan stating that the site is inactive and unstaffed so that performing visual examinations during a qualifying event is not feasible

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Addendum A

ADDENDUM A - POLLUTANTS IDENTIFIED IN TABLES II AND III OF APPENDIX D OF 40 CFR
PART 122

**TABLE II - ORGANIC TOXIC POLLUTANTS IN EACH OF FOUR FRACTIONS IN
ANALYSIS BY GAS CHROMATOGRAPHY/MASS SPECTROSCOPY (GS/MS)**

Volatiles		Base/Neutral	
1V	acrolein	1B	acenaphthene
2V	acrylonitrile	2B	acenaphthylene
3V	benzene	3B	anthracene
5V	bromoform	4B	benzidine
6V	carbon tetrachloride	5B	benzo(a)anthracene
7V	chlorobenzene	6B	benzo(a)pyrene
8V	chlorodibromomethane	7B	3,4-benzofluoranthene
9V	chloroethane	8B	benzo(ghi)perylene
10V	2-chloroethylvinyl ether	9B	benzo(k)fluoranthene
11V	chloroform	10B	bis(2-chloroethoxy)methane
12V	dichlorobromomethane	11B	bis(2-chloroethyl)ether
14V	1,1-dichloroethane	12B	bis(2-chloroisopropyl)ether
15V	1,2-dichloroethane	13B	bis (2-ethylhexyl)phthalate
16V	1,1-dichloroethylene	14B	4-bromophenyl phenyl ether
17V	1,2-dichloropropane	15B	butylbenzyl phthalate
18V	1,3-dichloropropylene	16B	2-chloronaphthalene
19V	ethylbenzene	17B	4-chlorophenyl phenyl ether
20V	methyl bromide	18B	chrysene
21V	methyl chloride	19B	dibenzo(a,h)anthracene
22V	methylene chloride	20B	1,2-dichlorobenzene
23V	1,1,2,2-tetrachloroethane	21B	1,3-dichlorobenzene
24V	tetrachloroethylene	22B	1,4-dichlorobenzene
25V	toluene	23B	3,3'-dichlorobenzidine
26V	1,2-trans-dichloroethylene	24B	diethyl phthalate
27V	1,1,1-trichloroethane	25B	dimethyl phthalate
28V	1,1,2-trichloroethane	26B	di-n-butyl phthalate
29V	trichloroethylene	27B	2,4-dinitrotoluene
31V	vinyl chloride	28B	2,6-dinitrotoluene
		29B	di-n-octyl phthalate
		30B	1,2-diphenylhydrazine (as azobenzene)
		31B	fluoranthene
1A	2-chlorophenol	32B	fluorene
2A	2,4-dichlorophenol	33B	hexachlorobenzene
3A	2,4-dimethylphenol	34B	hexachlorobutadiene
4A	4,6-dinitro-o-cresol	35B	hexachlorocyclopentadiene
5A	2,4-dinitrophenol	36B	hexachloroethane
6A	2-nitrophenol	37B	indeno(1,2,3-cd)pyrene
7A	4-nitrophenol	38B	isophorone
8A	p-chloro-m-cresol	39B	napthalene

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Addendum A

9A	pentachlorophenol	40B	nitrobenzene
10A	phenol	41B	N-nitrosodimethylamine
11A	2,4,6-trichlorophenol	42B	N-nitrosodi-n-propylamine
		43B	N-nitrosodiphenylamine
		44B	phenanthrene
		45B	pyrene
		46B	1,2,4-trichlorobenzene

Pesticides	
1P	aldrin
2P	alpha-BHC
3P	beta-BHC
4P	gamma-BHC
5P	delta-BHC
6P	chlordan
7P	4,4'-DDT
8P	4,4'-DDE
9P	4,4'-DDD
10P	dieldrin
11P	alpha-endosulfan
12P	beta-endosulfan
13P	endosulfan sulfate
14P	endrin
15P	endrin aldehyde
16P	heptachlor
17P	heptachlor epoxide
18P	PCB-1242
19P	PCB-1254
20P	PCB-1221
21P	PCB-1232
22P	PCB-1248
23P	PCB-1260
24P	PCB-1016
25P	toxaphene

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Addendum A

TABLE III - OTHER TOXIC POLLUTANTS (METALS AND CYANIDE) AND TOTAL PHENOLS

Antimony, Total
Arsenic, Total
Beryllium, Total
Cadmium, Total
Chromium, Total
Copper, Total
Lead, Total
Mercury, Total
Nickel, Total
Selenium, Total
Silver, Total
Thallium, Total
Zinc, Total
Cyanide, Total
Phenols, Total

TABLE V - TOXIC POLLUTANTS AND HAZARDOUS SUBSTANCES REQUIRED TO BE IDENTIFIED BY EXISTING DISCHARGERS IF EXPECTED TO BE PRESENT

Toxic Pollutants	
Asbestos	
Hazardous Substances	Hazardous Substances (Continued)
Acetaldehyde	Malathion
Allyl alcohol	Mercaptodimethur
Allyl chloride	Methoxychlor
Amyl acetate	Methyl mercaptan
Aniline	Methyl methacrylate
Benzonitrile	Methyl parathion
Benzyl chloride	Mevinphos
Butyl acetate	Mexacarbate
Butylamine	Monoethyl amine
Captan	Monomethyl amine
Carbaryl	Naled
Carbofuran	Napthenic acid
Carbon disulfide	Nitrotoluene
Chlorpyrifos	Parathion
Coumaphos	Phenosulfanate
Cresol	Phosgene
Crotonaldehyde	Propargite
Cyclohexane	Propylene oxide
2,4-D (2,4-Dichlorophenoxy acetic acid)	Pyrethrins
Diazinon	Quinoline

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Addendum A

Dicamba	Resorcinol
Dichlobenil	Strontium
Dichlone	Strychnine
2,2-Dichloropropionic acid	Styrene
Dichlorvos	2,4,5-T (2,4,5-Trichlorophenoxy acetic acid)
Diethyl amine	TDE (Tetrachlorodiphenylethane)
Dimethyl amine	2,4,5-TP [2-(2,4,5-Trichlorophenoxy) propanoic acid]
Dintrobenzene	Trichlorofan
Diquat	Triethanolamine dodecylbenzenesulfonate
Disulfoton	Triethylamine
Diuron	Trimethylamine
Epichlorohydrin	Uranium
Ethion	Vanadium
Ethylene diamine	Vinyl acetate
Ethylene dibromide	Xylene
Formaldehyde	Xylenol
Furfural	Zirconium
Guthion	
Isoprene	
Isopropanolamine Dodecylbenzenesulfonate	
Kelthane	
Kepone	

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Addendum B

ADDENDUM B - NOTICE OF INTENT (NOI) FORM
(NEXT PAGE)

**TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION**

Division of Water Resources

William R. Snodgrass Tennessee Tower, 312 Rosa L. Parks Avenue, 11th Floor, Nashville, Tennessee 37243

1-888-891-8332 (TDEC)

Notice of Intent (NOI) for General NPDES Multi-Sector Permit (TMSP) for Stormwater Discharges from Industrial ActivitiesType of application: ☐ New ☐ Reissuance ☐ Modification(If this NOI is Reissuance or Modification provide the existing permit tracking number: **TNR05**____)

Facility Name:	County:
Street Address or Location:	Latitude (DD.DDD):
	Longitude (-DD.DDD):
Attach a copy of a topo map, a city map, or a county map, identifying the location of this facility and each outfall	<input type="checkbox"/> Map Attached
Has a Storm Water Pollution Prevention Plan (SWPPP) been developed?	<input type="checkbox"/> Yes <input type="checkbox"/> No

Owner or Operator: (the person or legal entity which controls facility's operation; this may or may not be the same as the facility name or the official contact name)				
1	Official Contact Person Name: (Individual Responsible for a Facility)	Title or Position:		
	Mailing Address:	City:	State:	Zip:
	Phone: ()	E-mail:		
2	Local Contact Person Name: (if appropriate, write "same as #1")	Title or Position:		
	Facility Address: (this may or may not be the same as street address)	Facility City:	State: TN	Zip:
	Phone: ()	E-mail:		
Write in the box (to the right) or circle the number (above) to indicate where to send correspondence and invoices:				

Stormwater runoff enters following stream(s) and/or lake(s): (for each outfall, give names and latitude/longitude)					Number of stormwater outfalls:		
Nature of business:		SIC code(s): (primary code listed as No.1, secondary, if applicable, as No.2, etc.)					
		1.	2.	3.	4.	5.	6.
Area of property associated with industrial activity: _____ Acres (area of facility property should <u>not</u> include recreation areas, landscaping, lawns, greenfields, forest, office buildings, employee parking lots, etc.)		Permit Sectors (STATE USE ONLY)					
Activities at facility: Check all that apply.							
01. <input type="checkbox"/> Manufacturing	05. <input type="checkbox"/> Vehicle Maintenance	09. <input type="checkbox"/> Wastewater treatment	13. <input type="checkbox"/> Coal Pile				
02. <input type="checkbox"/> Storage/Distribution	06. <input type="checkbox"/> Hazardous waste TSD	10. <input type="checkbox"/> Land application	14. <input type="checkbox"/> Borrow Pit or Soil Harvesting				
03. <input type="checkbox"/> Vehicle Storage	07. <input type="checkbox"/> Outside waste disposal	11. <input type="checkbox"/> Landfill	99. <input type="checkbox"/> Other: _____				
04. <input type="checkbox"/> Trucking Terminal	08. <input type="checkbox"/> Recycling	12. <input type="checkbox"/> Mining operation					

CERTIFICATION AND SIGNATURE (Make all entries in ink, not with a pencil. This NOI must be signed by a responsible corporate officer for a corporation, a general partner for a partnership, the proprietor for a sole proprietorship, or a principal executive officer or ranking elected official for a public agency.)

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. As specified in Tennessee Code Annotated Section 39-16-702(a)(4), this declaration is made under penalty of perjury.			
Printed Name	Official Title	Signature	Date

STATE USE ONLY

Received Date	Fee(s)	Reviewer	EFO	Tracking No. TNR05
---------------	--------	----------	-----	------------------------------



TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION

Division of Water Resources

William R. Snodgrass Tennessee Tower, 312 Rosa L. Parks Avenue, 11th Floor, Nashville, Tennessee 37243

1-888-891-8332 (TDEC)

Notice of Intent (NOI) for General NPDES Multi-Sector Permit (TMSP) for Stormwater Discharges from Industrial Activities

	T & E Aquatic Fauna	Exceptional Tennessee Water?	Impaired Receiving Stream	NOC Date
--	---------------------	------------------------------	---------------------------	----------

INDUSTRIAL ACTIVITY – STORM WATER DISCHARGES
NOTICE OF INTENT (NOI) - INSTRUCTIONS

Complete the form Type or print clearly, using black or blue ink; not markers or pencil. Answer each item or enter “N/A,” for not applicable. If you need additional space, attach a separate piece of paper to the TMSP NOI (Notice of Intent). **Requesting coverage under this permit means that an applicant has obtained and examined a copy of this permit, and thereby acknowledges applicant’s ability to be in compliance with permit terms and conditions.** This permit is required for discharges of industrial stormwater. This form should be submitted at least 30 days prior to the commencement of stormwater discharges from an industrial facility.

Permittee Identification/Facility Identification Describe and locate the project, use the legal or official name of the facility or site. Provide the latitude and longitude (expressed in decimal degrees) of the center of the site, which can be located on USGS quadrangle maps as well as latitude and longitude of each outfall. Attach a copy of a portion of a 7.5 minute quad map, showing location of site, with boundaries at least one mile outside the site boundaries.

Give the name(s) of receiving waters Trace the route of stormwater runoff from the site and determine the name of the river(s), stream(s), creek(s), wetland(s), lake(s) or any other water course(s) into which the stormwater drains. Note that the receiving water course may or may not be located on the site. If the first water body receiving test water discharge is unnamed (“unnamed tributary”), determine the name of the water body which the unnamed tributary enters.

Submitting the form Note that this form must be signed by the company President, Vice-President, or a ranking elected official in the case of a municipality, for details see subpart 7.7 of the general permit. Submit the completed NOI form (keep a copy for your records) to the appropriate address listed below, based on the type of facility.

Submit the original of the completed and signed form to:
Stormwater NOI Processing
Tennessee Division of Water Resources
312 Rosa L. Parks Avenue, 11th Floor
Nashville, TN 37243-1534

Mining and Quarrying facilities only (Sectors J and H):
Stormwater NOI Processing – Mining Section
Tennessee Division of Water Resources
3711 Middlebrook Pike
Knoxville, TN 37921

Signed and scanned PDF copy of the form can be submitted to: Water.Permits@tn.gov. We accept and encourage electronic document submittals.

Notice of Coverage The division will review the NOI for completeness and accuracy and transmit to the permittee a Notice of Coverage (NOC).

Obtaining more information/assistance For more information or assistance, contact your local Environmental Field Office (EFO), toll-free, at 1-888-891-8332 (TDEC) or at the number listed below.

EFO	Street Address	City	Zip Code	Telephone
Chattanooga	1301 Riverfront Parkway, Suite #206	Chattanooga	37402	(423) 634-5745
Columbia	1421 Hampshire Pike	Columbia	38401	(931) 380-3371
Cookeville	1221 South Willow Ave.	Cookeville	38506	(931) 432-4015
Jackson	1625 Hollywood Drive	Jackson	38305	(731) 512-1300
Johnson City	2305 Silverdale Road	Johnson City	37601	(423) 854-5400
Knoxville	3711 Middlebrook Pike	Knoxville	37921	(865) 594-6035
Memphis	8383 Wolf Lake Drive	Bartlett	38133	(901) 371-3000
Nashville	711 R.S. Gass Boulevard	Nashville	37216	(615) 687-7000

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Addendum C

ADDENDUM C - LIST OF APPLICABLE REFERENCES

The following guidance manuals contain valuable information in assisting permittees in complying with the permit conditions of the multi-sector general permit and are available from

The Office of Water Resources Center

USEPA - RC-4100

401 M Street, S.W.

Washington, D.C. 20460

Telephone: (202) 260-7786

Stormwater Management for Industrial Activities, Developing Pollution Prevention Plans and Best Management Practices (EPA-832-R-92-006, September 1992).

Summary: Stormwater Management for Industrial Activities, Developing Pollution Prevention Plans and Best Management Practices (October 1992).

NPDES Stormwater Sampling Guidance Document (EPA 833-B-92-001, July 1992).

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Addendum D

ADDENDUM D – ANNUAL STORM WATER MONITORING REPORT FORM
(NEXT PAGE)

**ANNUAL STORM WATER MONITORING REPORT**

for Storm Water Discharges Associated with Industrial Activity under the

TENNESSEE MULTI-SECTOR GENERAL PERMIT (TMSP)

Facility Name:		TMSP Number:	
Contact Person:		Phone Number:	
This report is submitted for the following calendar year (e.g. 2015):		Outfall Number:	
List all TMSP sectors which apply to discharge from this outfall:		Sample Date:	
Low Concentration Waiver (Note 3): list all parameters for which the facility is certifying that there has not been a significant change in industrial activity or the pollution prevention measures in the area of the facility that drains to the outfall for which sampling was waived:			

DIRECTIONS:

In the spaces below, provide the results of stormwater monitoring for the designated outfall. The parameters for which monitoring must be conducted depend on which industry sector(s) of the TMSP applies to the discharge. Look up your sector(s) in the permit and analyze for the parameters that apply. If parameter is not listed below, submit additional sheets. All samples should be collected by grab technique.

Parameter	Cut-off Conc. (mg/L)	Annual Sample Result (mg/L)	Parameter (continued)	Cut-off Conc. (mg/L)	Annual Sample Result (mg/L)
Aluminum, Total	0.75		Magnesium, Total	0.0636	
Ammonia	4.0		Mercury, Total	0.0024	
Arsenic, Total	0.16854		Nickel, Total	0.875	
BOD, 5-Day	30		Nitrate + Nitrite Nitrogen	0.68	
Cadmium, Total	0.0159		Oil and Grease	15	
COD	120		pH	5.0-9.0	
Copper, Total	0.018		Phosphorus, Total (as P)	2.0	
Cyanide, Total	0.064		Selenium, Total	0.2385	
Fluoride	1.8		Silver, Total	0.032	
Iron, Total	5.0		Total Suspended Solids (TSS)	150	
Lead, Total	0.15		Zinc, Total	0.395	

CERTIFICATION AND SIGNATURE

(Make all entries in ink, not with a pencil. This report must be signed by a responsible corporate officer for a corporation, a general partner for a partnership, the proprietor for a sole proprietorship, or a principal executive officer or ranking elected official for a public agency.)

I certify under penalty of law that this document and all of its attachments were prepared under my direction or my supervision in accordance with a system designed to assure qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. As specified in Tennessee Code Annotated Section 39-16-702(a)(4), this declaration is made under penalty of perjury.

Printed Name

Official Title

Signature

Date

**Tennessee Multi-Sector General Permit (TMSP)
Annual Stormwater Monitoring Report – Instructions**

1. The purpose of this form is to report stormwater (SW) monitoring results under the TMSP. **Only 1 sample per calendar year is required** (except Sectors J & H, see <http://tn.gov/environment/permits/strmh2o.shtml>). Grab samples should be collected within the first 30 minutes (or as soon thereafter as practical, but not to exceed one hour) of when the runoff or snowmelt begins discharging. A separate form must be submitted for each outfall. If more than 1 sample is collected at any outfall, submit the average results of all monitoring data (for calculating average, use ½ of a detection level, if parameter was not detected). New facilities must conduct sampling in the year during which permit coverage was obtained and during each following year. The form(s) shall be submitted 30 days after the sampling results are obtained, but no later than the March 31st of the following calendar year.
2. If the results of annual SW runoff monitoring demonstrates that the facility has exceeded the cut-off concentration(s), the permittee must inform the Division's local Environmental Field Office (EFO) in writing within 30 days from the time SW monitoring results were received, describing the likely cause of the exceedance(s). Furthermore, within 60 days from the time SW monitoring results were received, the facility must review its stormwater pollution prevention plan (SWPPP), make any modifications or additions to the plan which would assist in reducing runoff concentrations to less than the monitoring cut-off concentrations for that parameter, and submit to the local EFO a summary of the proposed SWPPP modifications (including a timetable for implementation).
3. Low Concentration Waiver – When the average concentration for a pollutant calculated from monitoring data collected from the first 4 calendar years of monitoring is less than the cut-off concentration, a facility may waive monitoring requirements in the last annual monitoring period. This form should be used for certification of low concentration waiver provision.

**Complete, sign and date this form before it is submitted. Keep a copy of the completed form for your records.
Submit the original completed and signed form to the appropriate Environmental Field Office using the addresses below:**

EFO	Street Address	City	Zip Code	Telephone
Chattanooga	1301 Riverfront Parkway, Suite #206	Chattanooga	37402	(423) 634-5745
Columbia	1421 Hampshire Pike	Columbia	38401	(931) 380-3371
Cookeville	1221 South Willow Ave.	Cookeville	38506	(931) 432-4015
Jackson	1625 Hollywood Drive	Jackson	38305	(731) 512-1300
Johnson City	2305 Silverdale Road	Johnson City	37601	(423) 854-5400
Knoxville	3711 Middlebrook Pike	Knoxville	37921	(865) 594-6035
Memphis	8383 Wolf Lake Drive	Bartlett	38133	(901) 371-3000
Nashville	711 RS Gass Boulevard	Nashville	37216	(615) 687-7000

Tennessee Storm Water Multi-Sector
General Permit for Industrial Activities (TMSP)
Addendum E

ADDENDUM E – DISCHARGE MONITORING REPORT (DMR) FORM
(NEXT PAGE)

PERMITTEE NAME/ADDRESS (Include Facility Name/Location if Different)

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM (NPDES)
DISCHARGE MONITORING REPORT (DMR)

Form Approved.
OMB No. 2040-0004

NAME

ADDRESS

FACILITY

LOCATION

Permit Number	Discharge Number

COVERAGE TERM :
TO

Monitoring Period						
Year	Mon	Day		Year	Mon	Day
			To			

NOTE: Read instructions before completing this form.

PARAMETER		QUANTITY OR LOADING			QUALITY OR CONCENTRATION				No. Ex	Frequency of Analysis	SAMPLE TYPE
		Average	Maximum	Units	Minimum	Average	Maximum	Units			
	SAMPLE MEASUREMENT										
	PERMIT REQUIREMENT										
	SAMPLE MEASUREMENT										
	PERMIT REQUIREMENT										
	SAMPLE MEASUREMENT										
	PERMIT REQUIREMENT										
	SAMPLE MEASUREMENT										
	PERMIT REQUIREMENT										
	SAMPLE MEASUREMENT										
	PERMIT REQUIREMENT										
	SAMPLE MEASUREMENT										
	PERMIT REQUIREMENT										
	SAMPLE MEASUREMENT										
	PERMIT REQUIREMENT										

Name/Title Principal Executive Officer	I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.		Telephone		Date		
TYPED OR PRINTED		SIGNATURE OF PRINCIPAL EXECUTIVE OFFICER OR AUTHORIZED AGENT	AREA CODE	NUMBER	YEAR	MONTH	DAY

COMMENT AND EXPLANATION OF ANY VIOLATIONS (Reference all attachments here)

Paperwork Reduction Act Notice

Public reporting burden for this collection of information is estimated to vary from a range of 10 hours as an average per response for some minor facilities, to 110 hours as an average per response for some major facilities, with a weighted average for major and minor facilities of 18 hours per response, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding the burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Chief, Information Policy Branch, PM-223, U.S. Environmental Protection Agency, 401 M Street, SW, Washington, DC 20460; and to the Office of Information and Regulatory Affairs, Office of Management and Budget, Washington, DC 20503.

General Instructions

1. If form has been partially completed by preprinting, disregard instructions directed at entry of that information already pre-printed.
2. Enter "Permittee Name/Mailing Address (and facility name/ location, if different)," "Permit Number," and "Discharge Number" where indicated. (A separate form is required for each discharge.)
3. Enter dates beginning and ending "Monitoring Period" covered by form where indicated.
4. Enter each "Parameter" as specified in monitoring requirements of permit.
5. Enter "Sample Measurement" data for each parameter under "Quantity" and "Quality" in units specified in permit. "Average" is normally arithmetic average (geometric average for bacterial parameters) of all sample measurements for each parameter obtained during "Monitoring Period"; "Maximum" and "Minimum" are normally extreme high and low measurements obtained during "Monitoring Period". (Note to municipals and secondary treatment requirement: Enter 30-day average of sample measurements under "Average", and enter maximum 7-day average of sample measurements obtained during monitoring period under "Maximum.")
6. Enter "Permit Requirement" for each parameter under "Quantity" and "Quality" as specified in permit.
7. Under "No Ex" enter number of sample measurements during monitoring period that exceeded maximum (and/or minimum or 7-day average as appropriate) permit requirement for each parameter. If none, enter "0".
8. Enter "Frequency of Analysis" both as "Sample Measurement" (actual frequency of sampling and analysis used during monitoring period) and as "Permit Requirement" specified in permit. (e.g. Enter "Cont," for continuous monitoring, "1/7" for one day per week, "1/30" for one day per month, "1/90" for one day per quarter, etc.)
9. Enter "Sample Type" both as "Sample Measurement" (actual sample type used during monitoring period) and as "Permit Requirement", (e.g. Enter "Grab" for individual sample, "24HC" for 24-hour composite, "CONT" for continuous monitoring, etc.)
10. Where violations of permit requirements are reported, attach a brief explanation to describe cause and corrective actions taken, and reference each violation by date.
11. If "No Discharge" occurs during monitoring period, check the box for "No Discharge".
12. Enter "Name/Title of Principal Executive Officer" with "Signature of Principal Executive Officer or Authorized Agent", "Telephone Number", and "Date" at bottom of form.
13. Mail signed Report to Office(s) 30 days after receiving analytical results. Retain copy for your records.
14. More detailed instructions for use of this Discharge Monitoring Report (DMR) form may be obtained from Office(s) specified in permit.

Legal Notice

This report is required by law (33 U.S.C. 1318; 40 C.F.R.125.27). Failure to report or failure to report truthfully can result in civil penalties not to exceed \$10,000 per day of violation; or in criminal penalties not to exceed \$25,000 per day of violation, or by imprisonment for not more than one year, or by both.