From:
 Vojin Janjic

 To:
 Elizabeth Rorie

 Cc:
 Bill Murph

Subject: FW: Application for Individual Construction Permit Foxman LLC Montgomery County

Date: Wednesday, March 14, 2018 1:19:54 PM

Attachments: <u>image002.png</u>

Please process. No acknowledgement necessary. The site may be already established by the EFO (as this was a previously permitted area). Please coordinate with Bill Murph. Thanks.

Vojin

From: Hunt, Melanie A [mailto:Melanie.Hunt2@aecom.com]

Sent: Wednesday, March 14, 2018 12:38 PM

To: DWR NEFO

Cc: Vojin Janjic; Bill Murph; John Link; Smith, Chris

Subject: Application for Individual Construction Permit Foxman LLC Montgomery County

*** This is an EXTERNAL email. Please exercise caution. DO NOT open attachments or click links from unknown senders or unexpected email - STS-Security. ***

To whom it may concern,

Please find Attached SWPPP for Application for an Individual Construction Permit for the Foxman, LLC site in Montgomery County, TN.

Check will be mailed for appropriate processing.

Thanks.

Melanie A Hunt, PE

Site Civil Engineer D +931-215-3603

melanie.hunt2@aecom.com

This e-mail and any attachments contain AECOM Corporation confidential information that may be proprietary or privileged. If you receive this message in error or are not the intended recipient, you should not retain, distribute, disclose or use any of this information and you should destroy the e-mail and any attachments or copies.

AECOM

Franklin, Tennessee, United States Columbia, South Carolina, United States T +803-254-4400 aecom.com

Imagine it. Delivered.

<u>LinkedIn Twitter Facebook Instagram</u>



©2018 Time Inc. Used under license.



Transmittal

To TDEC EFO

Subject SWPPP Individual Construction

Permit

Prepared by Melanie A Hunt, PE **Transmittal No** 2018-MAH:001

Date March 05, 2018

Location Columbia, SC-Franklin, TN Project number 60557793

Issued by AECOM DCS

Client Foxman, LLC

Reason for issue Individual Construction Permit Application

SWPPP Individual Construction Permit Application

Attached Electronic Transmittal of SWPPP Document including Signed NOI, Certification page, signed cover letter and sealed SWPPP TOC.

Check being transmitted via mail service.



STORMWATER POLLUTION PREVENTION PLAN

(SWPPP)
INDIVIDUAL CONSTRUCTION PERMIT

FOXMAN, LLC

Project reference: FORMER HSC SITE - MONTGOMERY COUNTY, TN

March 05, 2018



AECOM 1000 Corporate Centre Drive Franklin, TN 37067

March 05, 2018

Your Reference Former HSC Site

Our Reference Foxman, LLC

TDEC Environmental Field Office 711 R. S. Gass Blvd. Nashville, TN 37243

Individual Construction Permit

Dear ATTN: Stormwater NOI Processing

Enclosed is a completed NOI for coverage under the General NPDES Permit for Stormwater Discharges from Construction Activities for the above referenced facility. We are applying for an Individual Construction Permit for the site. Also enclosed is a copy of the Stormwater Pollution Prevention Plan. The project disturbance is greater than 150 acres; therefore, a check in the amount of \$10,000.00 is being mailed to you via mail.

Please let us know if you need any additional information to process the NOI. I can be contacted at (931) 215-3603.

Yours sincerely,

Melanie A Hunt, PE Site Civil Engineer **Engineer of Record**

AECOM

T: 931-215-3603

E: melanie.hunt2@aecom.com

enclosures: payment via mail

cc: John Link

Chris Smith

SWPPP INFORMATION AND CERTIFICATION STATEMENTS

**	100		
Pro	Oct	N	ame
110	CCL	TA	ame

Foxman, LLC

Former HSC Site – Individual Construction Permit

Montgomery County, TN


"I certify under penalty of law that this document and all attachments were prepared by me, or under my direction or supervision. The submitted information is to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment. As specified in Tennessee Code Annotated Section 39-16-702(a)(4), this declaration is made under penalty of perjury."

Signature of Principal Executive Officer or Authorized Agent

Date Signed

TABLE OF CONTENTS

1.0	Purpose	1
2.0	Site Background	1
3.0	Existing Conditions	1
4.0	Proposed Conditions	3
5.0	Stormwater Pollution Prevention Plan	3
6.0	Quality Assurance	4
7.0	Safe Dams Act	5
8.0	Associated Site Permits	5



APPENDICES

APPENDIX A: Site Location Map/Quad Map

APPENDIX B: USDA Web Soil Survey

APPENDIX C: Site Outfalls Exhibit

APPENDIX D: Twice Weekly Inspection Form

APPENDIX E: Major Activity Log

APPENDIX F: Rain Gauge Log

APPENDIX G: Notice of Intent

APPENDIX H: Tennessee Erosion and Sediment Control Handbook (By Reference)

1.0 Purpose

This Stormwater Pollution Prevention Plan (SWPPP) follows all requirements set forth within the Tennessee Department of Environment and Conservation (TDEC) Division of Water Pollution Control's General NPDES Multi-Sector Permit for Discharges of Stormwater from Construction Activities (TNR100000).

This SWPPP is submitted on behalf of Foxman, LLC for the Proposed Site Development of the Former HSC Site. This SWPPP pertains to development activities for the entire project site as exhibited in Appendix C. Coverage under an Individual Construction Permit is being requested, because the site construction will need to exceed 50 acres of disturbed area to facilitate construction and better coordinate comprehensive Erosion Control plans and Best Management Practices for an overall site. The responsible parties are listed below:

Owner: Foxman, LLC

708 Lynhaven Street Lenoir, NC 28645

Point of Contact: John Link Phone: (828) 934-4540

Engineer: AECOM

1000 Corporate Centre Dr., Suite 250

Franklin, TN 37067-6209

Point of Contact: Melanie A. Hunt, PE

Phone: (931) 215-3603

Contractor: The Whiting Turner Contracting Company

Point of Contact: Brent Voyles Phone: (813) 302-3187

2.0 Site Background

Foxman, LLC (henceforth referred to as the Owner) has obtained the former Hemlock Semiconductor (HSC) Site in Montgomery County, TN. The Owner intends to redevelop the abandoned site to service their industry needs. The entire site under request for an Individual Construction Permit is approximately 704 acres. Under HSC ownership, the Tennessee Department of Environment & Conservation (TDEC) issued an Individual NPDES Stormwater Runoff from Construction Activities Permit, Permit Number: TN0080845. The current Owner is requesting coverage following the same parameter, because the sediment basins and associated apparatuses remain active and will continue to function as the outfall points for this project's extents. The Owner requests coverage under an Individual Construction Permit utilizing the existing sediment basins and stormwater runoff parameters and calculations from TN0080845 and will provide green infrastructure to promote and provide the Water Quality measures required by the Montgomery County AHJ.

3.0 Existing Conditions

The proposed development is located at Latitude 36.6233 and Longitude -87.2647. For travel to the site by road, head west on I-24 from Nashville, take exit 4 east to US-79. Travel 1.5 miles on US-79 to Solar Way. Travel north on Solar Way for 1 mile. The site is located at 1000 Solar Way. The proposed development will occur inside the secure perimeter fence and requires security clearance to access. A Site Location Map can be found in **Appendix A** for reference. The Site Location Map is projected on the United States Geological Survey (USGS) Clarksville, TN quad map. A scaled version of the full Clarksville quad map and surrounding quad maps can be found in **Appendix A**.

As part of the HSC development, the site was generally graded flat (slopes less than 5%). The proposed redevelopment portion of the site currently has three stormwater outfall points to Spring Creek. Spring Creek is listed as Waters with Unavailable Parameters for the following reasons:

- · Loss of biological integrity due to siltation,
- Total phosphorous,
- Nitrate + nitrite, and
- Alteration of stream-side or littoral vegetation.

The three outfall points and the 704 acre area requested for permit is illustrated in **Appendix C**. **Image 1** is taken from the HSC NDPES TN0080845 Permit SWPPP. The approximate location of Spring Creek is shown in blue.

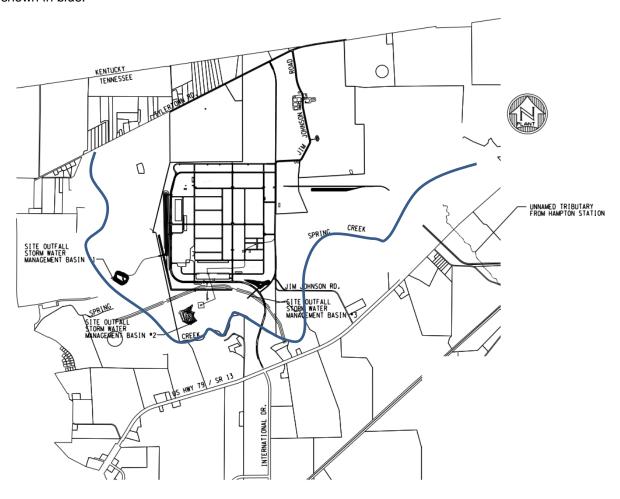


Image 1: Site Stormwater Outfall Points

According to the United States Department of Agriculture (USDA) Web Soil Survey, the Hydrologic Soil Group within the proposed site is Soil Group B, having moderate infiltration rates. The USDA Web Soil Survey can be found in **Appendix B**. The existing surface is mostly finished with a thin layer of gravel. The gravel reduces erosion while promoting infiltration.

4.0 Proposed Conditions

The proposed development will include Data Centers and supporting infrastructure. New city water, fire water, sanitary sewer, storm sewer, natural gas, and fiber conduits will be installed to supplement the existing infrastructure. Access roads, parking lots, and secure site entrance upgrades are also part of the development. All infrastructures are private to the Owner's development. **Appendix C** includes the overall site perimeter and depicts existing outfalls as constructed by the previous HSC property owner. The entire 704 acre site could potentially be under various phases of construction at any one time.

The construction sequencing may vary due to contractor, owner, and engineer input; however, it will generally follow the succeeding sequence:

- Install temporary erosion prevention and sediment control (EPSC) measures
- Demolition of existing infrastructure, structural systems not used, and associated apparatus
 - o City Water: Small Diameter Pressure Pipe
 - Fire Water: Small Diameter Pressure Pipe
 - Service Water Supply/Return: Large Pressure Pipe
 - Sanitary Sewer: Small Diameter Gravity Sewer
 - Containment Sewer: Large Diameter Gravity Sewer
 - Process Water: Small Diameter Gravity Sewer
 - Overhead and Underground Electrical wires and duct banks
- Install proposed underground utilities
- Construct proposed buildings, support equipment, and associated appurtenances
- Establish finished grades
- Stabilize finished grades
- Install permanent Green Infrastructure
- Remove temporary EPSC measures

Drainage patterns will not be affected by the proposed development and will remain consistent with the HSC NPDES TN0080845 permit and the existing conditions in relation to the referenced site-wide outfalls.

5.0 Stormwater Pollution Prevention Plan

Appendix C illustrates the implemented site disturbance area. An active, updated SWPPP is in place for all disturbed portions of the site. EPSC plans are prepared in accordance with good engineering practices to establish structural elements and EPSC measures designed to minimize erosion and maximize sediment removal. This includes silt fence, inlet protection, and construction entrances for Sediment Control Practices during construction until each portion has been completed and final stabilization is achieved. Comprehensive SWPPP measures and EPSC plans are developed, implemented and updated according to, at a minimum, the TDEC Best Management Practices (BMPs) referenced in the Tennessee Erosion and Sediment Control Handbook (TESCH). The post construction phases will assure finished

grades are stabilized and any permanent green infrastructure measures are in place prior to the removal of any temporary EPSC measures.

Site outfall points will be monitored and protected at all times and at no point will discharges to protected waters of Spring Creek be permitted to occur. Sediment shall be removed from sediment traps, silt fences, sedimentation ponds and other sediment controls as recommended and when design capacity has been reduced by 50%. Storm water runoff management practices include non-erosive velocity verification and devices to facilitate protection of erosive slopes as necessary. Runoff Control and Management in Chapter 7 shall be referenced as minimum BMP maintenance standards.

Litter, construction debris, and construction chemicals exposed to storm water shall be picked up prior to anticipated storm events or before being carried off of the site by wind or otherwise prevented from becoming a pollutant source for storm water discharges. Waste disposal systems and stored construction and waste materials shall be identified on site maintained plans and properly controlled with necessary EPSC controls. This would include storage practices to minimize exposure to storm water and provide necessary spill prevention and response. Look to Chapter 5 and Chapter 7 of the TESCH, for further reference of standard Pollution Prevention practices.

Off-site vehicle tracking of sediments and the generation of dust shall be minimized. Stabilized construction access shall be described and implemented on the field EPSC plans and SWPPP, as needed, to reduce the tracking of mud and dirt onto public roads by construction vehicles. See Sediment Control Practices for applicable BMPs.

All temporary and permanent disturbed slopes will be stabilized within 14 days where construction has temporarily or permanently ceased. If the slopes are greater than or equal to 35%, stabilization will occur within 7 days. Permanent stabilization or other permanently stable, non-eroding surface shall replace any temporary measures as soon as practicable. Stockpile areas shall be managed and maintained to prevent erosive conditions and shall be stabilized as described with Runoff Control and Management as well as Stabilization Practices as referenced in Chapter 7 of the TESCH.

The 5-year, 24-hour average recurrence interval design storm is used to design all EPSC measures. The 5-year, 24-hour average recurrence interval design storm was selected because the receiving stream, Spring Creek, is listed as Waters with Unavailable Parameters as discussed in Section 3 Existing Conditions. Rain gauge and daily rainfall records shall be maintained on site or use a reference site for a record of daily amount of precipitation.

6.0 Quality Assurance

BMP and Management Practices per Chapter 7 of the TESCH shall be followed at a minimum and are established to ensure site plan protective measures are kept in good and effective operating conditions. The twice weekly inspection forms can be found in **Appendix D**. In the event the EPSC measure(s) are inadequate, the inadequate measure(s) shall be corrected prior to the next precipitation event, but not more than 7 days following the inspection.

EPSC inspections will occur in accordance with the General NDPES Permit for Discharge of Stormwater Associated with Construction Activities on all un-stabilized disturbed surfaces and the Permit Section 3.5.8. They are as follows:

- Twice weekly inspections preformed a minimum of 72 hours apart unless permission is granted from TDEC due to work stoppage created by extreme weather (e.g. snow cover, ice, drought).
- Inspections will be conducted by a person with an active "Fundamentals of Erosion Prevention and Sediment Control Level 1" certification or a registered professional engineer in the State of Tennessee.

The existing sediment basins were established as an EPSC measure to comply with the HSC NPDES Permit TN0080845 and will be utilized as part of this project. Sediment deposits from the basin will be cleaned once 50% of the wet pool storage is compromised. In addition, a site assessment will be conducted on the sediment basins. The assessment will take place within 30 days to construction activities commencement to assure the sediment basins and all other EPSC measures are properly functioning in accordance with the NPDES permit. The site assessment will be conducted by a qualified individual per Permit Section 3.1.2 to verify the installation, functionality, and performance of the EPSC measures described in this SWPPP.

7.0 Safe Dams Act


Currently, there are not any state regulated dams associated with the Owner's property. No basin modifications are planned; therefore, the existing sediment basins are not subject to the TDEC Safe Dams Act of 1973 regulations.

8.0 Associated Site Permits


The following permits have also been submitted and/or approved:

Foxman, LLC Current Permits						
Agency	Permit	Identification No.	Date Applied	Date Approved		
TDEC	Notification of Demolition and/or Asbestos Renovation	Notice by Contractor	2017-29-06	Notice by Contractor		
TDEC	NOC	TNR242315	2018-1-17	2018-2-15		
Montgomery	Land	13099	2017-9-5	2017-12-11		
County	Disturbance Permit	13652	2018-1-23	2018-2-2		

APPENDIX A

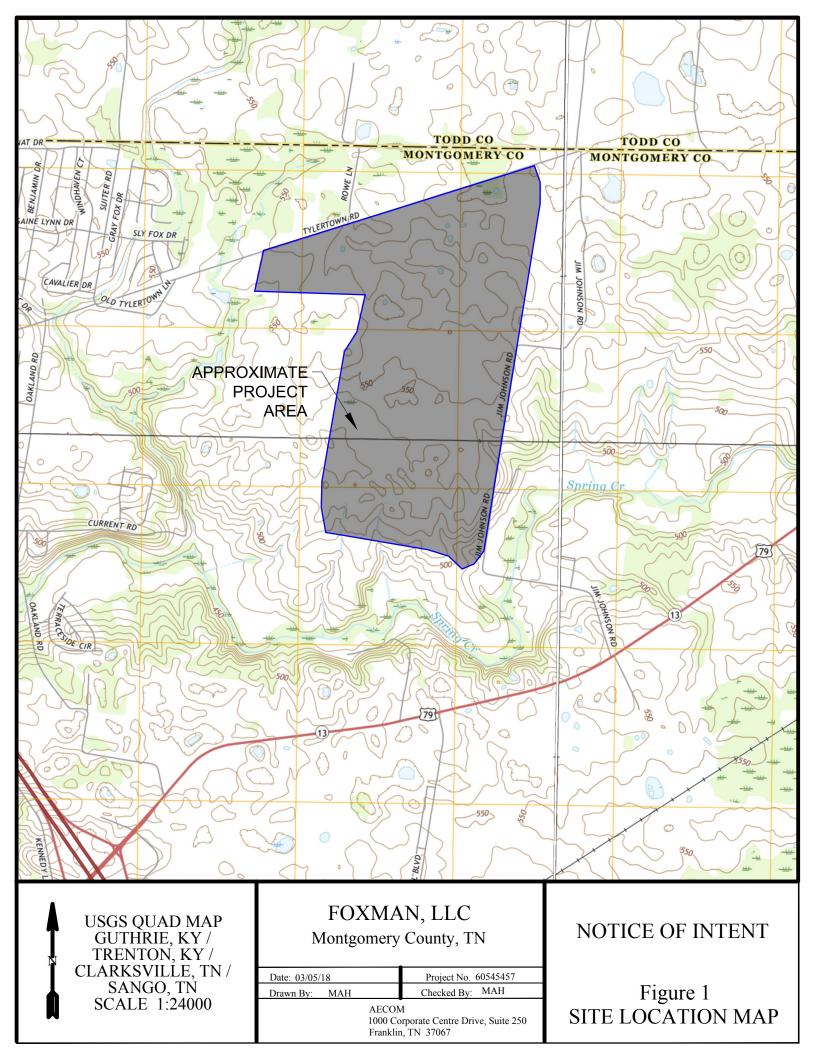

APPENDIX B

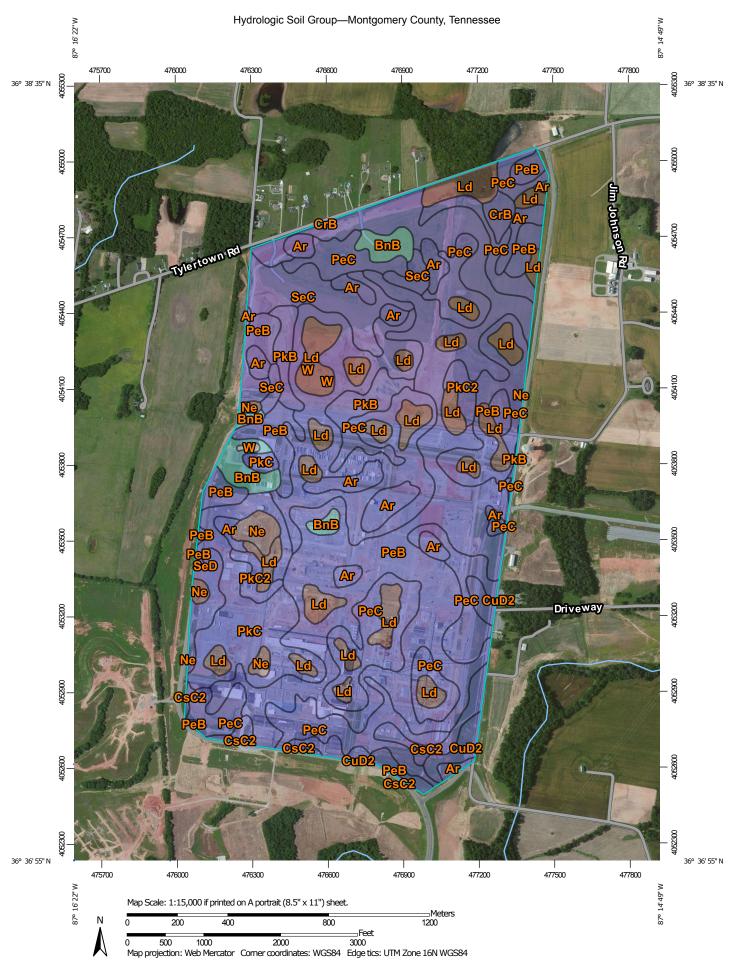

MAP LEGEND MAP INFORMATION The soil surveys that comprise your AOI were mapped at Area of Interest (AOI) С 1:15.800. Area of Interest (AOI) C/D Please rely on the bar scale on each map sheet for map Soils D measurements. Soil Rating Polygons Not rated or not available Α Source of Map: Natural Resources Conservation Service Web Soil Survey URL: **Water Features** A/D Coordinate System: Web Mercator (EPSG:3857) Streams and Canals В Maps from the Web Soil Survey are based on the Web Mercator Transportation projection, which preserves direction and shape but distorts B/D Rails --distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more Interstate Highways accurate calculations of distance or area are required. C/D **US Routes** This product is generated from the USDA-NRCS certified data as D Major Roads of the version date(s) listed below. Not rated or not available -Local Roads Soil Survey Area: Montgomery County, Tennessee Survey Area Data: Version 11, Sep 24, 2015 Soil Rating Lines Background Aerial Photography Soil map units are labeled (as space allows) for map scales 1:50,000 or larger. Date(s) aerial images were photographed: Mar 17, 2011—May 30, 2011 B/D The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor C/D shifting of map unit boundaries may be evident. D Not rated or not available **Soil Rating Points** Α A/D B/D

Hydrologic Soil Group

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
Ar	Arrington silt loam, 0 to 2 percent slopes, occasionally flooded	В	36.7	5.7%
BnB	Bedford silt loam, 2 to 5 percent slopes	С	16.5	2.5%
CrB	Crider silt loam, 2 to 6 percent slopes	В	4.2	0.6%
CsC2	Cumberland silty clay loam 5 to 12 percent slopes, eroded	В	15.4	2.4%
CuD2	Cumberland soils, cherty variant, 10 to 25 percent slopes, erode d (baxter)	В	8.7	1.3%
Ld	Lindell silt loam, 0 to 2 percent slopes, occasionally flooded	B/D	67.0	10.3%
Ne	Newark silt loam	B/D	9.4	1.5%
PeB	Pembroke silt loam, 2 to 5 percent slopes	В	201.8	31.2%
PeC	Pembroke silt loam, 5 to 12 percent slopes	В	178.6	27.6%
PkB	Pickwick silt loam, 2 to 5 percent slopes	В	18.7	2.9%
PkC	Pickwick silt loam, 5 to 12 percent slopes	В	44.0	6.8%
PkC2	Pickwick silt loam, 5 to 12 percent slopes, eroded	В	8.7	1.3%
SeC	Sengtown gravelly silt loam, 5 to 12 percent slopes	В	29.3	4.5%
SeD	Sengtown gravelly silt loam, 12 to 20 percent slopes	В	7.6	1.2%
W	Water		1.1	0.2%
Totals for Area of Inter	rest	1	647.8	100.0%

Description

Hydrologic soil groups are based on estimates of runoff potential. Soils are assigned to one of four groups according to the rate of water infiltration when the soils are not protected by vegetation, are thoroughly wet, and receive precipitation from long-duration storms.

The soils in the United States are assigned to four groups (A, B, C, and D) and three dual classes (A/D, B/D, and C/D). The groups are defined as follows:

Group A. Soils having a high infiltration rate (low runoff potential) when thoroughly wet. These consist mainly of deep, well drained to excessively drained sands or gravelly sands. These soils have a high rate of water transmission.

Group B. Soils having a moderate infiltration rate when thoroughly wet. These consist chiefly of moderately deep or deep, moderately well drained or well drained soils that have moderately fine texture to moderately coarse texture. These soils have a moderate rate of water transmission.

Group C. Soils having a slow infiltration rate when thoroughly wet. These consist chiefly of soils having a layer that impedes the downward movement of water or soils of moderately fine texture or fine texture. These soils have a slow rate of water transmission.

Group D. Soils having a very slow infiltration rate (high runoff potential) when thoroughly wet. These consist chiefly of clays that have a high shrink-swell potential, soils that have a high water table, soils that have a claypan or clay layer at or near the surface, and soils that are shallow over nearly impervious material. These soils have a very slow rate of water transmission.

If a soil is assigned to a dual hydrologic group (A/D, B/D, or C/D), the first letter is for drained areas and the second is for undrained areas. Only the soils that in their natural condition are in group D are assigned to dual classes.

Rating Options

Aggregation Method: Dominant Condition

Component Percent Cutoff: None Specified

Tie-break Rule: Higher

APPENDIX C

AECOM

101 Research Drive Columbia, South Carolina 29203 Telephone (803) 254-4400 : Fax (803) 771-6676 www.AECOM.com

APPENDIX C: SITE OUTFALLS EXHIBIT

DATE: MARCH 5, 2018

SWPPP/EPSC: REF. HSC PLANS

APPENDIX D



TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION (TDEC)

Division of Water Resources

William R. Snodgrass Tennessee Tower, 312 Rosa L. Parks Avenue, 11th Floor, Nashville, Tennessee 37243 1-888-891-8332 (TDEC)

General NPDES Permit for Stormwater Discharges from Construction Activities (CGP)

Construction Stormwater Inspection Certification (Twice-Weekly Inspections)

Site or Project Name:			NPDES Tracking Number: T	NR	
Primary Permittee Name:			Date of Inspection:		
Current approximate disturbed acreage:	Has rainfall been checked/odaily? Yes No		Name of Inspector:		
Current weather conditions:			Inspector's Training Certification Number:		
Please check the box if the following	ng items are on-site:	,			
Notice of Coverage (NOC)	Stormwater Pollution Preve	ention Plan (SWPPF	Twice-weekly insp	ection docume	entation
Site contact information	Rain Gage Off-site Re	ference Rain Gage	Location:		
Best Management Practices (BMPs	s):				
Are the Erosion Prevention and Se		unctioning correct	tly: If "No," describe below in	Comment Sec	tion
Are all applicable EPSCs instal	lled and maintained per the S	WPPP?		Yes	No
Are EPSCs functioning correctl	y at all disturbed areas/mater	rial storage areas pe	er section 4.1.5?	Yes	No
Are EPSCs functioning correctl contrast in the receiving stream				Yes	No
Are EPSCs functioning correctl	· · · · ·			Yes	No
5. If applicable, have discharges f section 4.1.4? If "No," describe	below the measures to be in	nplemented to addre	ess deficiencies.	Yes	No
6. If construction activity at any lood days per section 3.5.3.2? If "No				Yes	No
7. pollutants from equipment and "No," describe below the meas	vehicle washing, wheel wash	water, and other w			No
8. If a concrete washout facility is If "No," describe below the mea				A Yes	No
9. Have all previous deficiencies by Check if deficiencies/correct	peen addressed? If "No," des tive measures have been rep	•		· Yes	No
Certification and Signature (must be signed by the certified inspector and the permittee per Sections 3.5.8.2 (g) and 7.7.2 of the CGP) I certify under penalty of law that this document and all attachments were prepared by me, or under my direction or supervision. The submitted information is to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant					
penalties for submitting false informal Annotated Section 39-16-702(a)(4), t	nation, including the possib	ility of fine and in r penalty of perjury.	nprisonment. As specified	in Tennessee	
Inspector Name and Title:		Signature:	Date	:	
Primary Permittee Name and Title:		Signature:	Date	:	

Construction Stormwater Inspection Certification Form (Twice-Weekly Inspections)

Purpose of this form/ Instructions

An inspection, as described in section 3.5.8.2. of the General Permit for Stormwater Discharges from Construction Activities ("Permit"), shall be performed at least twice every calendar week and documented on this form. Inspections shall be performed at least 72 hours apart. Where sites or portion(s) of construction sites have been temporarily stabilized, or runoff is unlikely due to winter conditions (e.g., site covered with snow or ice), such inspection only has to be conducted once per month until thawing results in runoff or construction activity resumes.

As described in section 3.5.8.1 of the Permit, inspectors performing the required twice weekly inspections must have an active certification by completing the "Fundamentals of Erosion Prevention and Sediment Control Level I" course (http://www.tnepsc.org/). Twice weekly inspections can also be performed by: a licensed professional engineer or landscape architect; a Certified Professional in Erosion and Sediment Control (CPESC) or a person who has successfully completed the "Level II Design Principles for Erosion Prevention and Sediment Control for Construction Sites" course. A copy of the certification or training record for inspector certification should be kept on site.

Qualified personnel, (provided by the permittee or cooperatively by multiple permittees) shall inspect disturbed areas of the construction site that have not been finally stabilized, areas used for storage of materials that are exposed to precipitation, structural control measures, locations where vehicles enter or exit the site, and each outfall.

Disturbed areas and areas used for storage of materials that are exposed to precipitation shall be inspected for evidence of, or the potential for, pollutants entering the site's drainage system. Erosion prevention and sediment control measures shall be observed to ensure that they are operating correctly.

Outfall points (where discharges leave the site and/or enter waters of the state) shall be inspected to determine whether erosion prevention and sediment control measures are effective in preventing significant impacts to receiving waters. Where discharge locations are inaccessible, nearby downstream locations shall be inspected. Locations where vehicles enter or exit the site shall be inspected for evidence of offsite sediment tracking.

Based on the results of the inspection, any inadequate control measures or control measures in disrepair shall be replaced or modified, or repaired as necessary, before the next rain event if possible, but in no case more than 7 days after the need is identified.

Based on the results of the inspection, the site description identified in the SWPPP in accordance with section 3.5.1 of the Permit and pollution prevention measures identified in the SWPPP in accordance with section 3.5.2 of the Permit, shall be revised as appropriate, but in no case later than 7 days following the inspection. Such modifications shall provide for timely implementation of any changes to the SWPPP, but in no case later than 14 days following the inspection.

All inspections shall be documented on this Construction Stormwater Inspection Certification form. Alternative inspection forms may be used as long as the form contents and the inspection certification language are, at a minimum, equivalent to the division's form and the permittee has obtained a written approval from the division to use the alternative form. Inspection documentation will be maintained on site and made available to the division upon request. Inspection reports must be submitted to the division within 10 days of the request.

Trained certified inspectors shall complete inspection documentation to the best of their ability. Falsifying inspection records or other documentation or failure to complete inspection documentation shall result in a violation of this permit and any other applicable acts or rules.

APPENDIX E

MAJOR ACTIVITIES LOG

At a minimum, the Construction Manager or designee shall record dates below for beginning of major grading, temporary halt of construction, re-commencement of construction, permanent halt of construction, and when seeding and or stabilization begins. Include the name of the person recording the activity. Provide a copy of the form to the Construction Manager when the sheet is filled-out or on a monthly basis.

Description of Major Activity	Date	Name

APPENDIX F

RAINFALL GAUGE RECORD

Inspect rainfall gauge and record rainfall (to the nearest tenth of an inch) and the duration of the event in the appropriate columns on dates when rainfall occurs. Sign the sheet for each day of rainfall and present the sheet to the Construction Manager when the sheet has been filled and/or construction is complete. If a prolonged storm event occurs, it is recommended that erosion control device checks be performed and results recorded on the inspection form.

Date	Measured Rainfall (inches)	Duration (hours)	Inspector's Signature

APPENDIX G



TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION

Division of Water Resources

William R. Snodgrass Tennessee Tower, 312 Rosa L. Parks Avenue, 11th Floor, Nashville, Tennessee 37243 1-888-891-8332 (TDEC)

Notice of Intent (NOI) for General NPDES Permit for Stormwater Discharges from Construction Activities (TNR100000)

Site or Project Name: Foxman LLC, Clarksville Data Center - Individual Construction				NPDES Tracking Number: TNR			
Street Address 1000 Solar Way, Clarksville, TN 37040				Construction Start Date:			
of Location.				Estimated End Date:			
Site Individual Construction Permit New Site-wide Construction disturbance				Latitude (dd.dddd): 36.6233			
	Nn/	MC4 (if applicable). T		Longitude (-dd.dddd): -87.2647			
		MS4 (if applicable): T		Acres Disturbed	a:	704	
Check box if a SWPPP is		ck box if a site location m		Total Acres: 1,341.00			
Check the appropriate bo					Streams	✓ Wetlands	
Has a jurisdictional determined the jurisdiction of the jurisdicti			tifying waters of the Uni	ted States?: `	Yes [No 🗹	
If an Aquatic Resource A	Iteration Permit (ARAP)	has been obtained for th	is site, what is the perm	nit number? NR	(S) NA		
Receiving waters: Sprin	g Creek						
Site Owner/Developer (over construction plans a	and specifications): Fox	man, LLC		829			
For corporate entities on (an incorrect SOS contro	ly, provide correct Tenno I number may delay NO	essee Secretary of State I processing)	(SOS) Control Number	r: 000816348	l		
Site Owner or Developer	Contact Name: (signs th	ne certification below)	Title or Position:				
John Link			Authorized Signato	ry			
Mailing Address: 708 Ly	nhaven Street		City: Lenoir	State: NC		Zip: 28645	
Phone: (828) 934-4540 Fax: (n/a)			E-mail: johndlink@google.com				
Optional Contact: Melar	nie Hunt		Title or Position: AECOM Site Civil Engineer				
Mailing Address: 1000 Corporate Centre Drive Suite 250		City: Franklin	State: TN	1	Zip: 37067		
Phone: (931) 215-3603 Fax: (n/a)			E-mail: melanie.hunt	2@aecom.co	m		
Owner/Developer(s) Ce	rtification: (must be sign	ned by president, vice-pre	sident or equivalent, or ra	anking elected o	official) (Pr	imary Permittee)	
I certify under penalty of law that this document and all attachments were prepared by me, or under my direction or supervision. The submitted information is to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment. As specified in Tennessee Code Annotated Section 39-16-702(a)(4), this declaration is made under penalty of perjury.							
Owner/Developer Name (print/type): John Link			Signature: Date: 3//4/3		3/14/208		
Owner/Developer Name (print/type): n/a			Signature: Date:				
Contractor Certification: (must be signed by president, vice-president or equivalent, or ranking elected official) (Secondary Permittee)							
I certify under penalty of law that I have reviewed this document, any attachments, and the SWPPP referenced above. Based on my inquiry of the construction site owner/developer identified above and/or my inquiry of the person directly responsible for assembling this NOI and SWPPP, I believe the information submitted is accurate. I am aware that this NOI, if approved, makes the above-described construction activity subject to NPDES permit number TNR100000, and that certain of my activities on-site are thereby regulated. I am aware that there are significant penalties, including the possibility of fine and imprisonment for knowing violations, and for failure to comply with these permit requirements. As specified in Tennessee Code Annotated Section 39-16- 702(a)(4), this declaration is made under penalty of perjury.							
Contractor name, address, and SOS control number (if applicable): Signature: Date:							
Brent Voyles, Whiting-Turner, 4300 West Cypress St, Tampa, FL					4/18		
OFFICIAL STATE USE ONLY							
Received Date:	Reviewer:	Field Office:	Permit Tracking Number: TN	R	Exceptional	TN Water:	
Fee(s):	T & E Aquatic Flora/Fauna:	SOS Corporate Status:	Waters with Unavailable Par	ameters:	Notice of Co	verage Date:	

APPENDIX H *(By Reference)